



**REDUCED HEIGHT / CURVED
PROFILE / CHAMFERED BEZEL**

**DESIGNER DIE-CAST
CONSTRUCTION**

5 CCT SELECTABLE

ENHANCED DRIVER FILTERING

BUILT-IN SURGE PROTECTION

**QUICK INSTALL
MOUNTING BRACKET**

ENERGY STAR®

SUGGESTED APPLICATIONS:

Residential
Bathrooms
Closets
Bedrooms
Hallways

BLINK® PRO

SURFACE MOUNTED LED DOWNLIGHT

5" | 7" | 9" MODELS



SETTING THE STANDARD IN PROFESSIONAL LIGHTING

Form follows function in almost all rules of design. From designer aesthetics to “state-of-the-art” technology, Blink® embodies this concept entirely. Contemporary yet familiar, Blink is a versatile offering, suitable for nearly every environment. Encompassed in the sophisticated driver platform, advanced line conditioners and EMI filters ensure smooth even light distribution and dimming. The chamfered bezel edge, gracefully melds to the surface creating a sleek and low profile look.




THE DIFFERENCE IS IN THE DRIVER

While DOB (driver on board) flush mount fixtures may be an option, they don't offer the same level of performance, efficiency, and longevity as an external driver.

Blink's external drivers boast advanced componentry that better regulate the electricity flowing to the LED Chips, preventing electrical interference, overloading, and overheating. This extends the lifespan of our fixtures, setting them apart from DOB products that tend to experience premature driver failure and flickering due to inadequate filtering componentry. Furthermore, our external drivers are designed to match the precise needs of our LED fixtures, resulting in superior efficiency. Plus, the added componentry delivers improved dimming capabilities, which simply isn't possible to achieve with DOB designs due to limited spaces.


Driver Fits Most 3" & 4" J Box Installations
with a Minimum Interior Cubic Volume of 14"

**See measurement table for exact driver dimensions.*

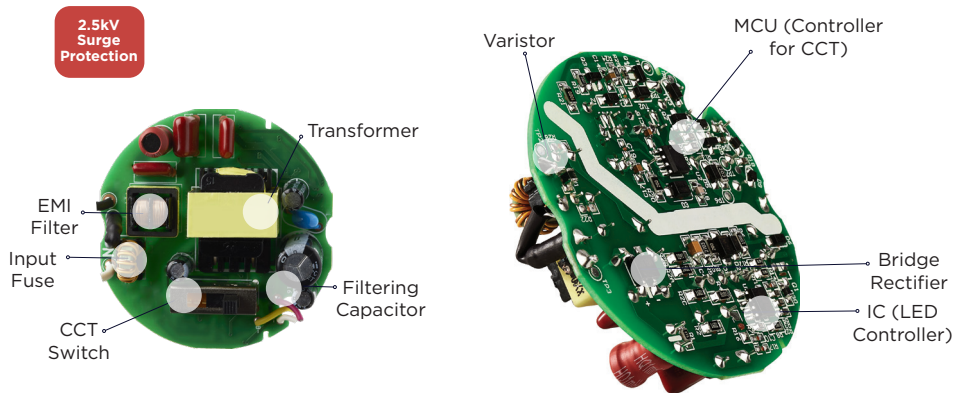

DRIVER SPECIFICATIONS

Robust External Driver Design
2.5 kV Surge Protection/Fused
EMI Filter
Inline Filter
Varistor for Smooth Triac dimming
CCT Selectable

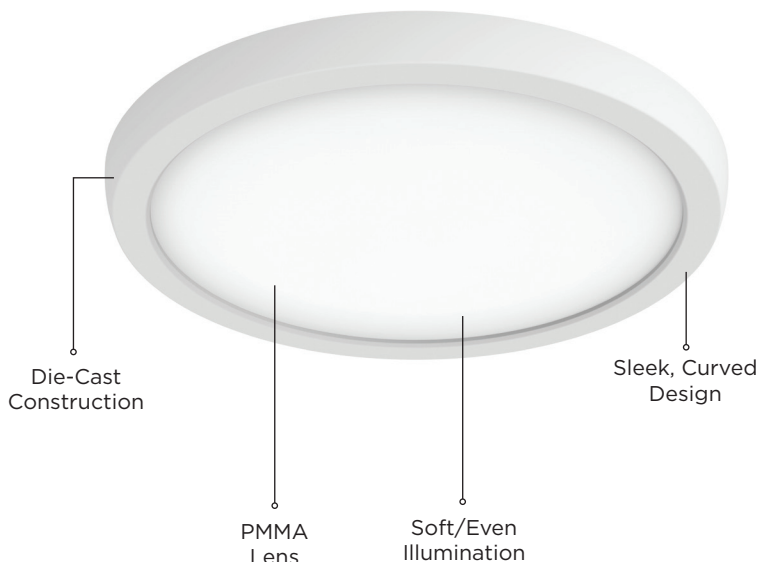

Blink® Pro 5", 7", and 9" Available Finishes:
White | Black | Bronze | Brushed Nickel



GENERAL SPECIFICATIONS - 120V MODEL

Input Voltage, Frequency: 120V, 60Hz
Power Factor, THD%: 0.9, <20%
CCT: 2700K/3000K/3500K/4000K/5000K
CRI: 90
Functional Life: 50,000 Hours
Location Rating: Wet (Indoor Only)

Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)
Suitable for Bathroom Applications: Yes
Dimmable: Yes, Triac

DRIVER SPECIFICATIONS

Robust External Driver Design
 2.5 kV Surge Protection/Fused
 EMI Filter
 Inline Filter
 Varistor for Smooth Triac dimming
 CCT Selectable

PERMITTED ZERO CLEARANCE FROM STORAGE MATERIAL



Complies with NEC 410.16(A)(3) & NEC 410.16(C)(5) Certified under UL 1598, suitable for clothes closet installation.

✓ = 5" & 7" Comply for Zero Clearance Applications

9" Consult NEC Code for Dimensional Parameters for installation in clothes closets.

ITEM SPECIFICATIONS / ORDER INFO



Item	Size	Shape	Finish	Watts	Lumens	Efficacy (Up to LPW)	Input Current @ 120	Closet Rated
62-1700	5"	Round	White	9W	700-780lm	86.67	0.075A	✓
62-1701	5"	Round	Black	9W	650-680lm	75.56	0.075A	✓
62-1702	5"	Round	Bronze	9W	650-680lm	75.56	0.075A	✓
62-1703	5"	Round	Brushed Nickel	9W	650-680lm	75.56	0.075A	✓
62-1710	7"	Round	White	11W	980-1050lm	95.45	0.092A	✓
62-1711	7"	Round	Black	11W	900-950lm	86.36	0.092A	✓
62-1712	7"	Round	Bronze	11W	900-950lm	86.36	0.092A	✓
62-1713	7"	Round	Brushed Nickel	11W	900-950lm	86.36	0.092A	✓
62-1720	9"	Round	White	13W	1300-1320lm	101.54	0.108A	*
62-1721	9"	Round	Black	13W	1200-1250lm	96.15	0.108A	*
62-1722	9"	Round	Bronze	13W	1200-1250lm	96.15	0.108A	*
62-1723	9"	Round	Brushed Nickel	13W	1200-1250lm	96.15	0.108A	*
62-1704	5"	Square	White	9W	680-730lm	81.11	0.075A	✓
62-1705	5"	Square	Black	9W	600-680lm	75.56	0.075A	✓
62-1706	5"	Square	Bronze	9W	600-680lm	75.56	0.075A	✓
62-1707	5"	Square	Brushed Nickel	9W	600-680lm	75.56	0.075A	✓
62-1714	7"	Square	White	11W	940-1000lm	90.91	0.092A	✓
62-1715	7"	Square	Black	11W	800-850lm	77.27	0.092A	✓
62-1716	7"	Square	Bronze	11W	800-850lm	77.27	0.092A	✓
62-1717	7"	Square	Brushed Nickel	11W	800-850lm	77.27	0.092A	✓
62-1724	9"	Square	White	13W	1200-1300lm	100.00	0.108A	*
62-1725	9"	Square	Black	13W	1032-1150lm	88.46	0.108A	*
62-1726	9"	Square	Bronze	13W	1032-1150lm	88.46	0.108A	*
62-1727	9"	Square	Brushed Nickel	13W	1032-1150lm	88.46	0.108A	*

* Consult NEC Code for Dimensional Parameters for installation in clothes closets.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Specifications are subject to change without prior notice.

GENERAL SPECIFICATIONS - 120/277V MODEL

Input Voltage, Frequency: 120/277V, 60Hz
Power Factor, THD%: 0.9, <20%
CRI: 90
Functional Life: 50,000 Hours
Location Rating: Wet (Indoor Only)

Ambient Operating Temperature:
 -20°C (-4°F) to +40°C (+104°F)
Suitable for Bathroom Applications: Yes
Dimmable: Yes, 0-10V

DRIVER SPECIFICATIONS

Robust External Driver Design
 2.5 kV Surge Protection/Fused
 EMI Filter
 Inline Filter

NON EM 0-10V VERSION / ITEM SPECIFICATIONS / ORDER INFO

* Not to be used with Blink® Pro 0-10V Emergency Battery Backup Units



Item	Size	Shape	Finish	Watts	Lumens	CCT	Efficacy (LPW)	Input Current @ 120 / 277V	Closet Rated
62-1718	7"	Round	White	11W	980lm	3000K	89.09	0.092/0.040A	*
62-1733	7"	Round	White	11W	980lm	4000K	78.40	0.104/0.045A	*
62-1728	9"	Round	White	13W	1300lm	3000K	92.31	0.108/0.047A	*
62-1743	9"	Round	White	13W	1300lm	4000K	76.47	0.142/0.061A	*
62-1719	7"	Square	White	11W	940lm	3000K	92.31	0.092/0.040A	*
62-1734	7"	Square	White	11W	940lm	4000K	75.20	0.104/0.045A	*
62-1729	9"	Square	White	13W	1200lm	3000K	92.31	0.108/0.047A	*
62-1744	9"	Square	White	13W	1200lm	4000K	70.59	0.142/0.061A	*

* Consult NEC Code for Dimensional Parameters for installation in clothes closets.

EM 0-10V VERSION / ITEM SPECIFICATIONS / ORDER INFO

* Only compatible with Blink® Pro 0-10V Emergency Battery Backup Units



Item	Size	Shape	Finish	Watts	Lumens	CCT	Efficacy (LPW)	Input Current @ 120 / 277V	Closet Rated
62-1746*	7"	Round	White	11W	980lm	3000K	89.09	0.092/0.040A	*
62-1748*	7"	Round	White	11W	980lm	4000K	78.40	0.104/0.045A	*
62-1756*	9"	Round	White	13W	1300lm	3000K	92.31	0.108/0.047A	*
62-1758*	9"	Round	White	13W	1300lm	4000K	76.47	0.142/0.061A	*
62-1747*	7"	Square	White	11W	940lm	3000K	92.31	0.092/0.040A	*
62-1749*	7"	Square	White	11W	940lm	4000K	75.20	0.104/0.045A	*
62-1757*	9"	Square	White	13W	1200lm	3000K	92.31	0.108/0.047A	*
62-1759*	9"	Square	White	13W	1200lm	4000K	70.59	0.142/0.061A	*

* Consult NEC Code for Dimensional Parameters for installation in clothes closets.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Specifications are subject to change without prior notice.

GENERAL SPECIFICATIONS - 120V

Input Voltage, Frequency: 120V, 60Hz

Battery Chemistry: LiFePO4

Location Rating: Dry (Indoor Only)

Dimmable: Yes, Triac

ITEM SPECIFICATIONS / ORDER INFO



Item	Size	Shape	Finish	Replacement Battery
62-1710-EM	7"	Round	White	25-9004
62-1711-EM	7"	Round	Black	25-9004
62-1712-EM	7"	Round	Bronze	25-9004
62-1713-EM	7"	Round	Br. Nickel	25-9004
62-1720-EM	9"	Round	White	25-9005
62-1721-EM	9"	Round	Black	25-9005
62-1722-EM	9"	Round	Bronze	25-9005
62-1723-EM	9"	Round	Br. Nickel	25-9005
62-1714-EM	7"	Square	White	25-9004
62-1715-EM	7"	Square	Black	25-9004
62-1716-EM	7"	Square	Bronze	25-9004
62-1717-EM	7"	Square	Br. Nickel	25-9004
62-1724-EM	9"	Square	White	25-9005
62-1725-EM	9"	Square	Black	25-9005
62-1726-EM	9"	Square	Bronze	25-9005
62-1727-EM	9"	Square	Br. Nickel	25-9005

* Compatible for use with 120V BLINK® Pro Models.

GENERAL SPECIFICATIONS - 120V/277V MODELS

Input Voltage, Frequency: 120V/277V, 60Hz

Battery Chemistry: LiFePO4

Location Rating: Dry (Indoor Only)

Dimmable: Yes, 0-10V

ITEM SPECIFICATIONS / ORDER INFO




Item	Size	Shape	Finish	Replacement Battery
62-1746-EM	7"	Round	White	25-9004
62-1756-EM	9"	Round	White	25-9005
62-1747-EM	7"	Square	White	25-9004
62-1757-EM	9"	Square	White	25-9005

* Compatible for use with 120V/277V BLINK® Pro Models.

DRIVER SPECIFICATIONS

Alert Function
Test Indicator Combo Button
90 Min. Battery Runtime
Die-Cast Construction

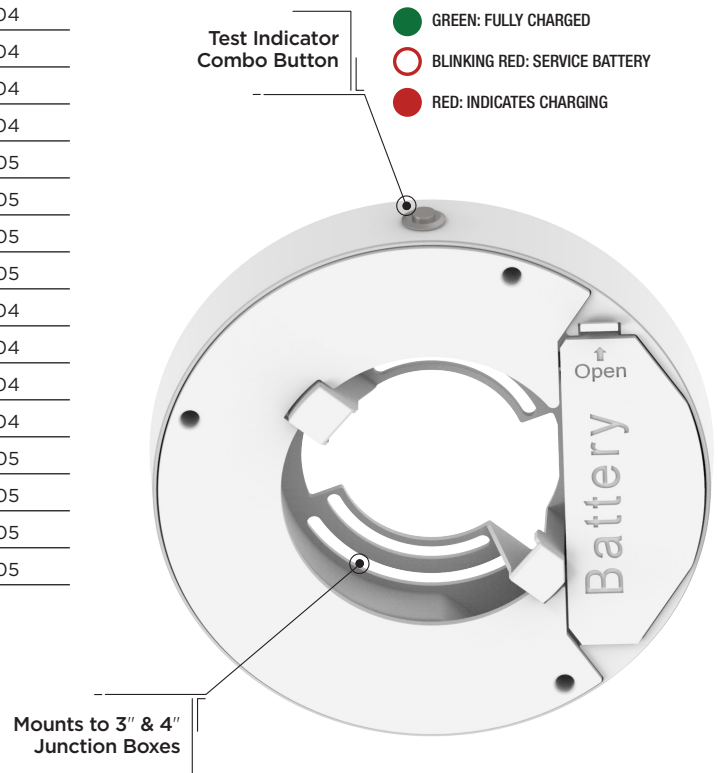





* BLINK® PRO FIXTURE SOLD SEPARATELY.
* SHOWN WITH 62/1710

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Specifications are subject to change without prior notice.





DIMENSIONS - 120V MODELS

(A) Diameter/ Length	(B) Inside Diameter/Length	(C) Trim Height	(D) Overall Height	(E) Driver Height	(F) Driver Diameter
5" Round	3.62"	0.67"	1.59"	.92"	2.36"
7" Round	5.62"	0.67"	1.59"	.92"	2.36"
9" Round	7.62"	0.67"	1.59"	.92"	2.36"
5" Square	3.62"	0.67"	1.59"	.92"	2.36"
7" Square	5.62"	0.67"	1.59"	.92"	2.36"
9" Square	7.62"	0.67"	1.59"	.92"	2.36"

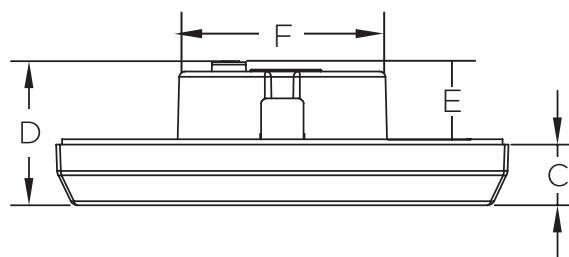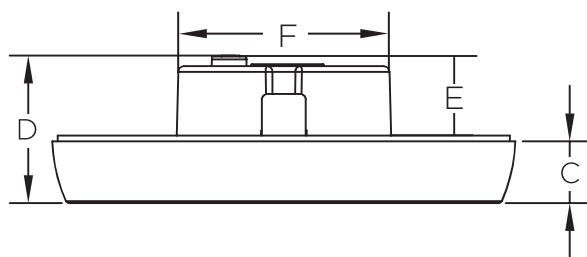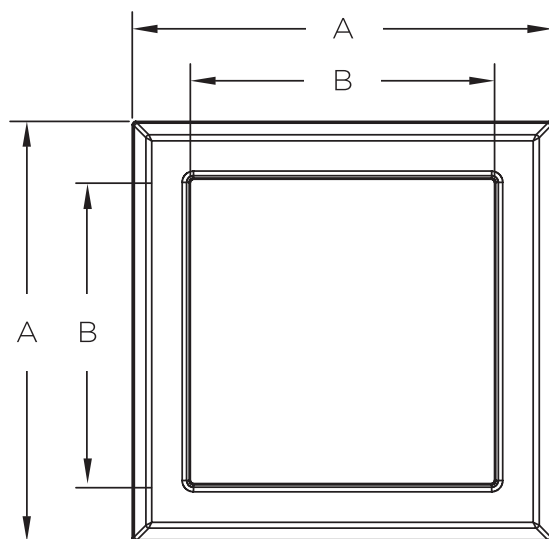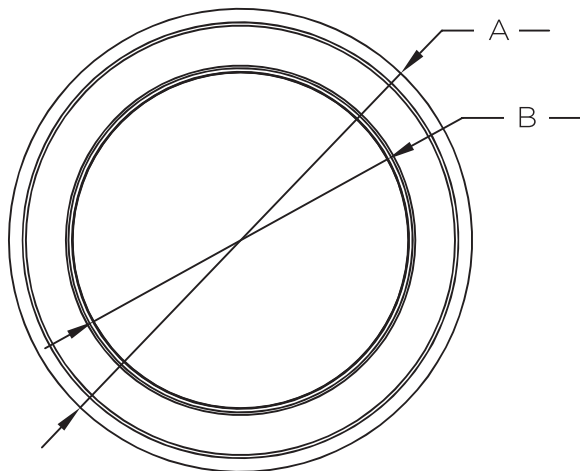

DIMENSIONS - 120/277V MODELS

(A) Diameter/ Length	(B) Inside Diameter/Length	(C) Trim Height	(D) Overall Height	(E) Driver Height	(F) Driver Diameter
7" Round	5.62"	0.67"	1.20"	.83"	2.36"
9" Round	7.62"	0.67"	1.20"	.83"	2.36"
7" Square	5.62"	0.67"	1.20"	.83"	2.36"
9" Square	7.62"	0.67"	1.20"	.83"	2.36"

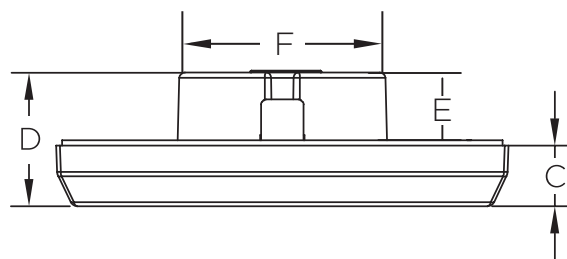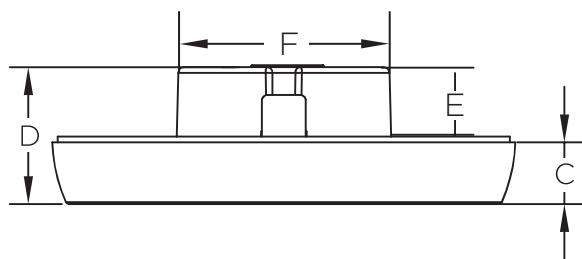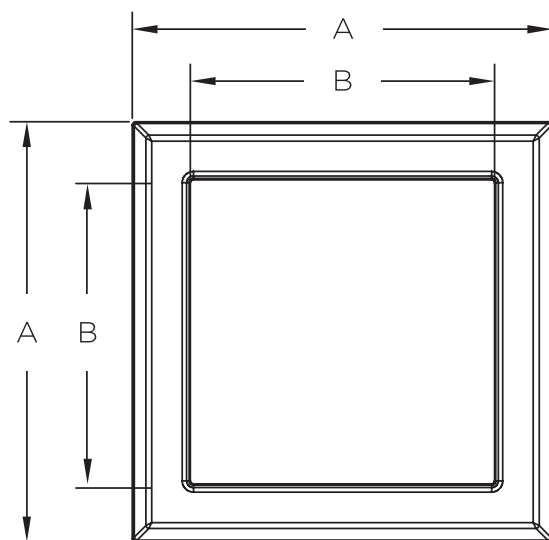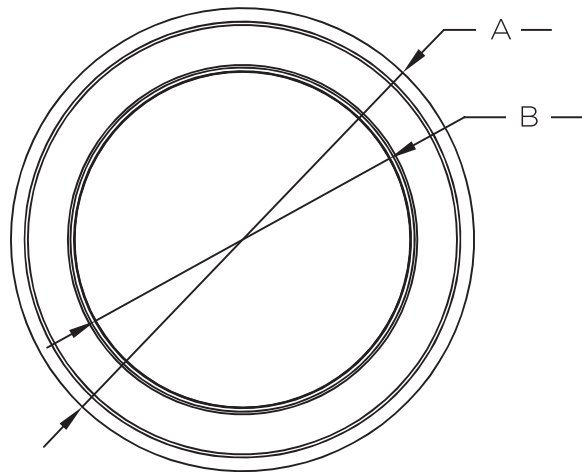

OPTIONAL EXTENSION COLLAR / ORDER INFO

Item	Size	Finish	Shape	Pk QTY
25-1700	5"	White	Round	1
25-1701	5"	Black	Round	1
25-1702	5"	Bronze	Round	1
25-1710	7"	White	Round	1
25-1711	7"	Black	Round	1
25-1712	7"	Bronze	Round	1
25-1713	7"	Brushed Nickel	Round	1
25-1720	9"	White	Round	1
25-1721	9"	Black	Round	1
25-1722	9"	Bronze	Round	1
25-1723	9"	Brushed Nickel	Round	1
25-1704	5"	White	Square	1
25-1705	5"	Black	Square	1
25-1706	5"	Bronze	Square	1
25-1714	7"	White	Square	1
25-1715	7"	Black	Square	1
25-1716	7"	Bronze	Square	1
25-1717	7"	Brushed Nickel	Square	1
25-1724	9"	White	Square	1
25-1725	9"	Black	Square	1
25-1726	9"	Bronze	Square	1
25-1727	9"	Brushed Nickel	Square	1


Extension Collar for
Tight Installations



Driver Fits Most 3" & 4" J Box Installations
with a Minimum Interior Cubic Volume
of 14" -- for tighter installations use
extension collar accessories

DIMENSIONS - ROUND COLLAR

(A) Diameter	(B) Trim Height
5.07"	1.10"
7.07"	1.16"
9.07"	1.16"





*Mix and Match Trims
for An Artistic Look*

Extension Collars come in White,
Black, and Bronze Finishes.

DIMENSIONS - SQUARE COLLAR

(A) Trim Length	(B) Trim Height
5.07"	1.10"
7.07"	1.16"
9.07"	1.16"



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Specifications are subject to change without prior notice.