


DIMENSION PRO

OUTDOOR LED SMART TAPE LIGHT KIT



STARFISH®
Controlled with App



**STARFISH® SMART
ENABLED PRODUCT**

**DYNAMIC RGB,
COLOR-CHANGING
& TUNABLE WHITE**

**PRE-SET & CUSTOM
COLOR-CHANGING EFFECTS**

**RF REMOTE CONTROL OR
APP CONTROLLED**

**16FT, 32FT & 64FT
KITS AVAILABLE**

**PLUG-IN OR
DIRECT-WIRE KITS**

SUGGESTED APPLICATIONS:

Outdoor Commercial or
Decorative Outdoor
Residential Applications

HIGH BRIGHTNESS




Millions of Colors



Warm to Cool Tunable White

Elevate your outdoor space with DIMENSION Pro Outdoor tape light kits. This smart, app-controlled lighting solution offers limitless customization. Choose from millions of colors and adjust the light from warm to cool tunable white. Sync it with your music for vibrant and captivating effects. With mesmerizing options, DIMENSION Pro transforms your outdoor area into a visual spectacle.

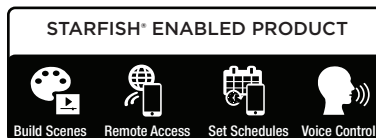

WIFI
2.4GHz
No Hub Required



*Via App or Remote



GENERAL SPECIFICATIONS

Color: RGBTW

CRI: 80

Functional Life: 50,000 Hours

Location Rating: Wet

Wired Controller: No

Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)

Cut to Length: No

Dimmable: Yes, Dimmable with App or Remote

Warranty: 1 Year

Remote: RF

ITEM SPECIFICATIONS / ORDER INFO



Item	Length	Style	Input Voltage	DC Voltage	Watts	Lumens	Number of Reels	UPC
64/140	16'	Plug In	120V	24V	18W	1920L	1	045923640568
64/141	32'	Plug In	120V	24V	30W	3080L	1	045923640575
64/142	64'	Plug In	120V	24V	68W	6300L	2	045923640582
64/143	16'	Direct Wired	120V-277V	24V	20W	1920L	1	045923640599
64/144	32'	Direct Wired	120V-277V	24V	30W	3080L	1	045923640605
64/145	64'	Direct Wired	120V-277V	24V	68W	6300L	2	045923640506

INCLUDED ACCESSORIES



Plug-In Driver



Direct Wire
Junction Box



Mounting
Clips



Receiver



RF Remote



Single Reel for
64/140, 64/141, 64/143, & 64/144 Kits



Dual Reel for
64/142 and 64/145 Kits



Dual Receiver

OPTIONAL ACCESSORIES



Mounting
Clip Pack



End Caps & Glue Set
64-166




10' Power Outdoor Extension Cord
64-171

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.


Specifications are subject to change without prior notice.

TAPE LIGHT DIMENSIONAL DIAGRAMS


64/140 | 64/143

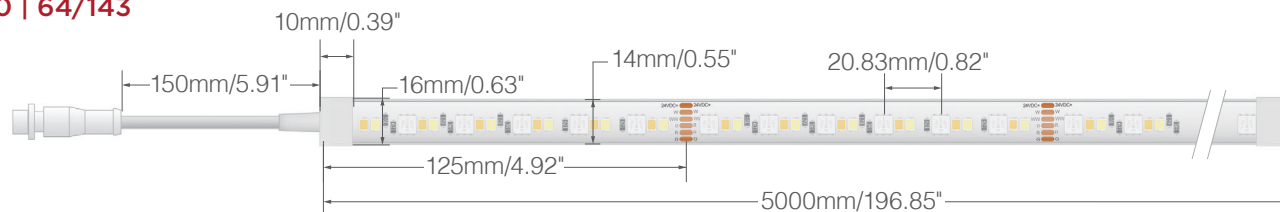

64/141 | 64/142 | 64/144 | 64/145

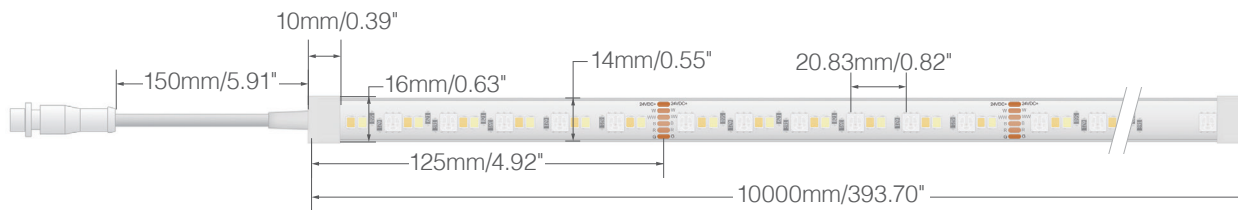

DRIVER CONNECTION DIAGRAMS

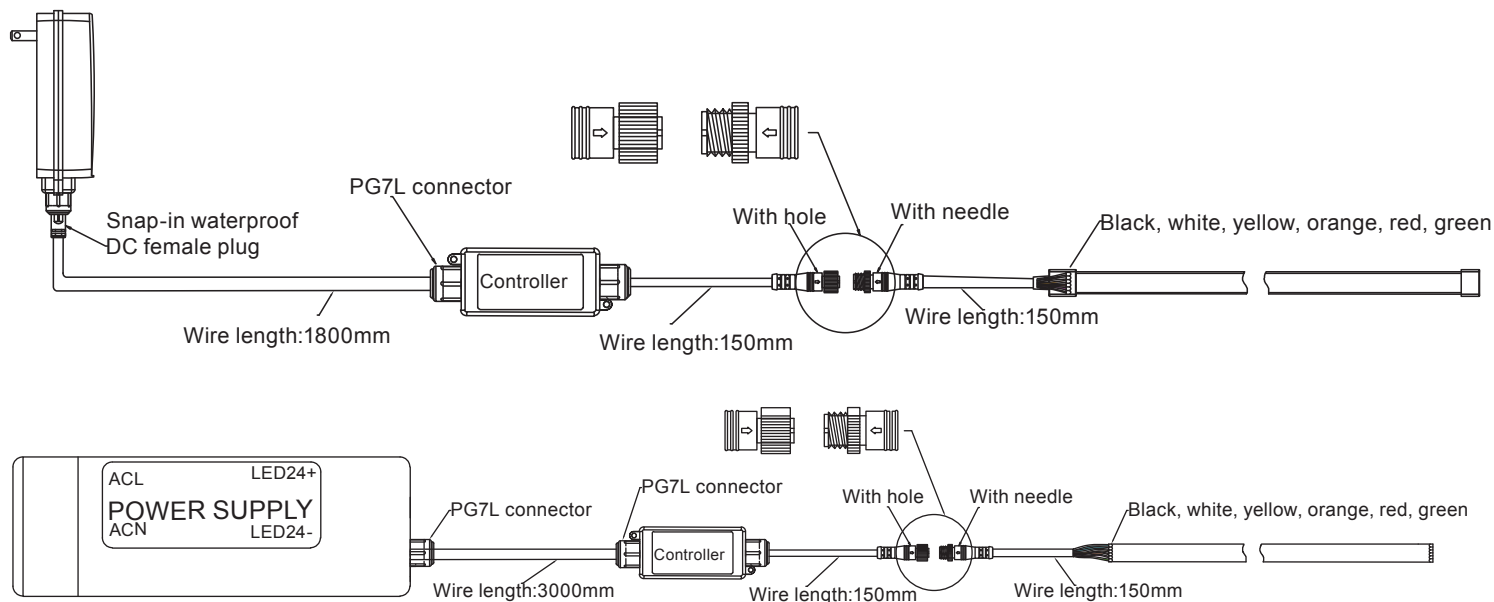

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Specifications are subject to change without prior notice.