

How to adjust settings on the motion sensor


65/093, 65/094, 65/107, 65/106, 65/108, 65/202, 65/203, 65/204, 65/206, 65/207, 65/208

After Installation follow below steps with power off

- Fixture heads must be positioned above the motion sensor head and controls on motion sensor must face to the ground.
- Aim fixture heads at least 20-deg down below horizontal to prevent water from accumulating inside the lens.

- 1- Set Time, need to turn the time knob (TIME) turn to the end (-)
- 2- For Detection range, turn the sensitivity Knob (SENS) turn to the end (+)
- 3- For the light control, turn clockwise the light control knob (Lux) toward the sun setting (☀️)
(turning the LUX setting all the way to the moon icon ☾ will allow the sensor to only turn on at night)
- 4- After the settings are done, the power needs to be turned ON, wait for light to turn OFF (appx 30s) after 5 seconds make sensor to sense again for the programing to take effect. Once that is done, adjust the time, Sensitivity, Lux depending on your desire, without turning the fixture back off and on.

Test Mode View

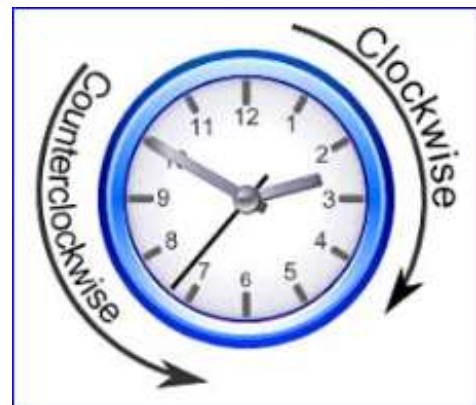

  	<p>National Toll-Free: 800.43.SATCO (800.437.2826) www.satco.com</p>	<p>Distribution Centers: New York, Florida, Texas, Washington, California, Puerto Rico</p>	<p>Corporate Offices: 110 Heartland Blvd., Brentwood, NY 11717 800.437.2826 631.243.2022 Fax 631.243.2027</p>	
---	--	--	---	---

©2012, Satco Products, Inc. Not responsible for typographical errors. 06/12 51051