




Tester:	Jinglan Zeng			Date:	11/Sep/2023
1	Item number			62/1715/EM, 62/1716/EM, 62/1717/EM	
2	Power source			2pcs IFR18650 2000mAh 3.2V	
3	Input frequency			NA	
4	Power supply properties			Emergency Power Supply	
5	Lux meter			EVERFINE Z-10	
6	Number of samples			1pc	
7	Voltage of full charged batteries without load			7.3V	
				Equipment Model	Illuminance Meter
					EVERFINE Z-10
Time(min)	2700K Lux *200cm, **60cm	% of Lux	***Lux 200cm Center		Remark
Battery ON	15.5				Charge for 24 H, the green light is on, 100% complete charge, collect the luminance value corresponding to the color temperature at different points in time. *Light cone height 200cm **Radius of the base of the light cone 30cm ***Center of the base of the light cone
0	15.5	100.0%	65.6		
10	9.1	58.7%	39.8		
20	9.1	58.7%	39.8		
30	9.1	58.7%	23.0		
40	8.7	56.1%	23.0		
50	8.7	56.1%	23.0		
60	8.7	56.1%	12.2		
70	8.7	56.1%	12.2		
80	8.0	51.6%	12.2		
90	8.0	51.6%	12.2		
108	0.0	0.0%	0.0		
108	Light off				
Tester: Jinglan Zeng Auditor: Jinglan Zeng Approved by: Shunyang					
Chen					
Trend:					

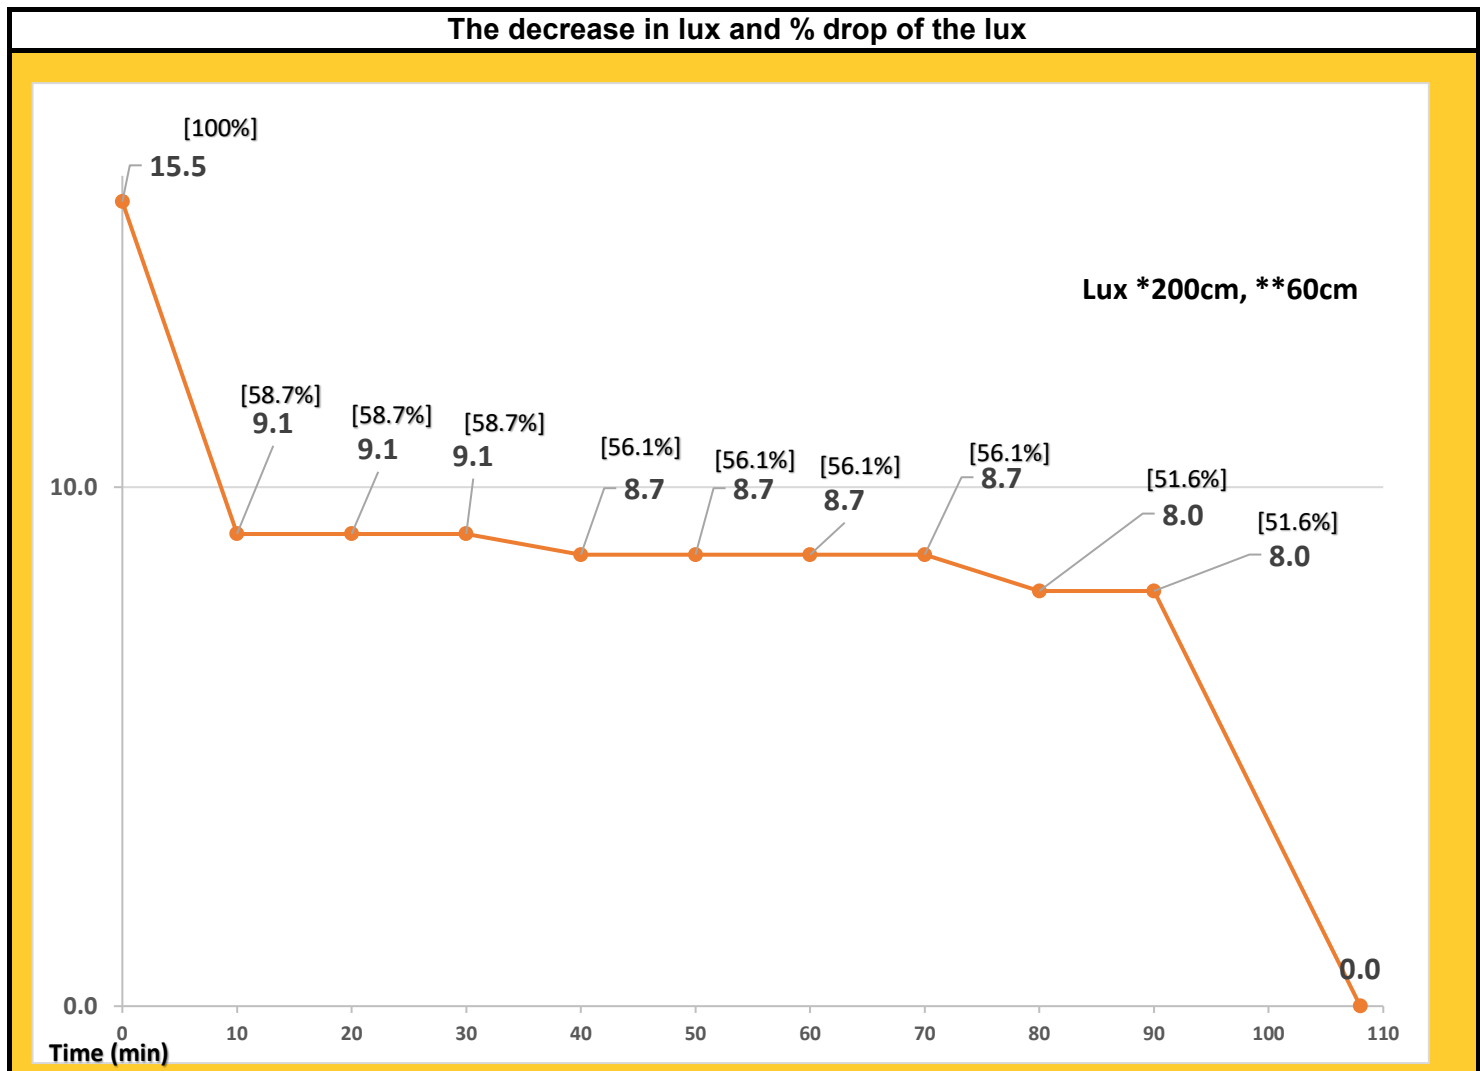


Tester:	Jinglan Zeng			Date:	11/Sep/2023
1	Item number			62/1715/EM, 62/1716/EM, 62/1717/EM	
2	Power source			2pcs IFR18650 2000mAh 3.2V	
3	Input frequency			NA	
4	Power supply properties			Emergency Power Supply	
5	Lux meter			EVERFINE Z-10	
6	Number of samples			1pc	
7	Voltage of full charged batteries without load			7.3V	
				Equipment Model	Illuminance Meter
					EVERFINE Z-10
Time(min)	3000K Lux *200cm, **60cm	% of Lux	***Lux 200cm Center		Remark
Battery ON	15.8				Charge for 24 H, the green light is on, 100% complete charge, collect the luminance value corresponding to the color temperature at different points in time. *Light cone height 200cm **Radius of the base of the light cone 30cm ***Center of the base of the light cone
0	15.8	100.0%	66.9		
10	8.9	56.3%	44.0		
20	8.9	56.3%	44.0		
30	8.9	56.3%	44.0		
40	8.6	54.4%	42.0		
50	8.6	54.4%	42.0		
60	8.6	54.4%	42.0		
70	8.6	54.4%	42.0		
80	8.2	51.9%	41.0		
90	8.2	51.9%	41.0		
108	0.0	0.0%	0.0		
108	Light off				
Tester: Jinglan Zeng Chen		Auditor: Jinglan Zeng			Approved by: Shunyang
Trend:					

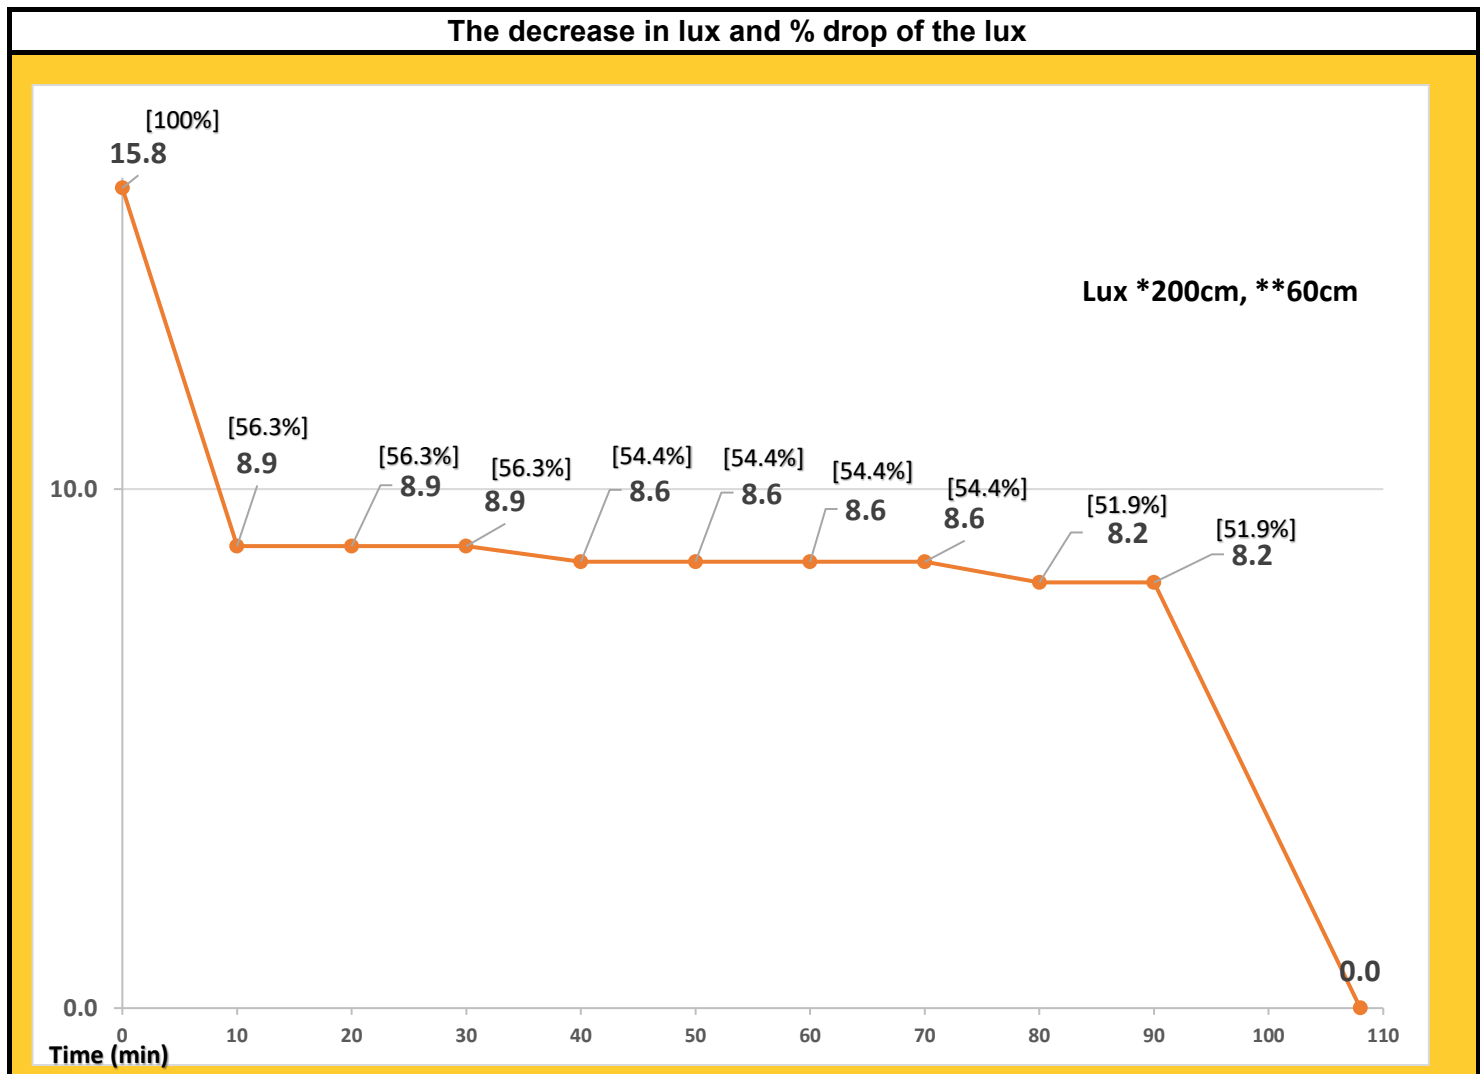

Tester:	Jinglan Zeng			Date:	11/Sep/2023
1	Item number			62/1715/EM, 62/1716/EM, 62/1717/EM	
2	Power source			2pcs IFR18650 2000mAh 3.2V	
3	Input frequency			NA	
4	Power supply properties			Emergency Power Supply	
5	Lux meter			EVERFINE Z-10	
6	Number of samples			1pc	
7	Voltage of full charged batteries without load			7.3V	
				Equipment Model	Illuminance Meter
					EVERFINE Z-10
Time(min)	3500K Lux *200cm, **60cm	% of Lux	***Lux 200cm Center		Remark
Battery ON	16.4				Charge for 24 H, the green light is on, 100% complete charge, collect the luminance value corresponding to the color temperature at different points in time. *Light cone height 200cm **Radius of the base of the light cone 30cm ***Center of the base of the light cone
0	16.4	100.0%	70.0		
10	11.0	67.1%	39.2		
20	11.0	67.1%	39.2		
30	11.0	67.1%	39.2		
40	10.6	64.6%	38.9		
50	10.6	64.6%	38.9		
60	10.6	64.6%	38.9		
70	10.6	64.6%	38.8		
80	10.2	62.2%	38.8		
90	10.2	62.2%	38.8		
108	0.0	0.0%	0.0		
108	Light off				
Tester: Jinglan Zeng Chen		Auditor: Jinglan Zeng			Approved by: Shunyang
Trend:					

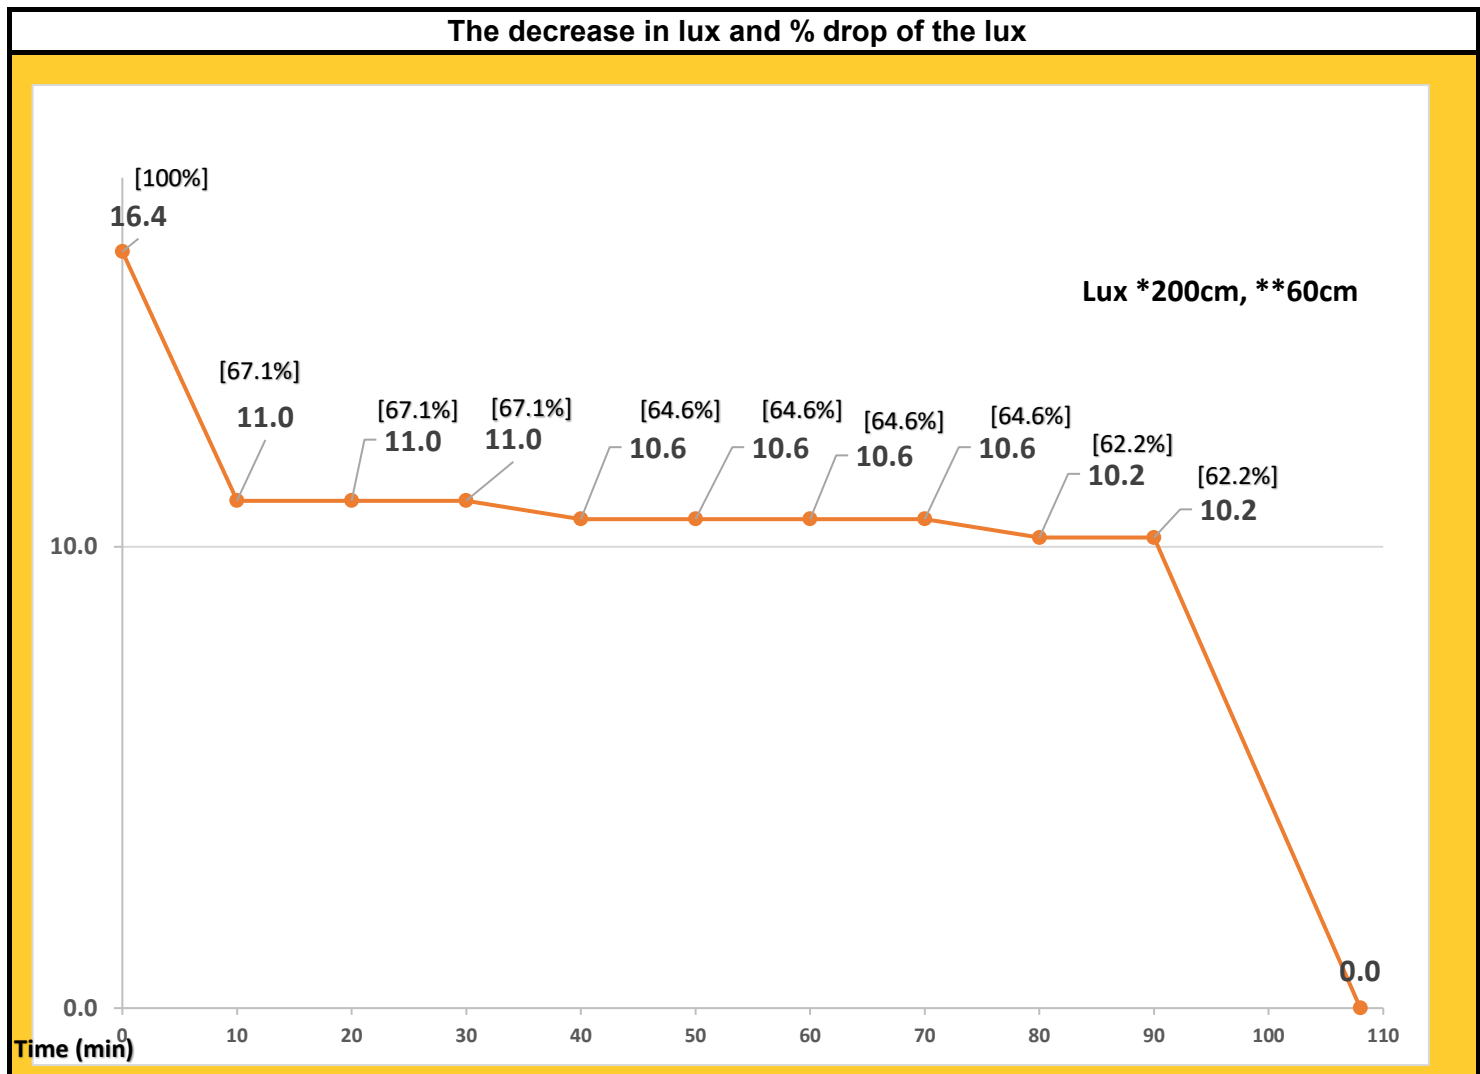

Tester:	Jinglan Zeng			Date:	11/Sep/2023
1	Item number			62/1715/EM, 62/1716/EM, 62/1717/EM	
2	Power source			2pcs IFR18650 2000mAh 3.2V	
3	Input frequency			NA	
4	Power supply properties			Emergency Power Supply	
5	Lux meter			EVERFINE Z-10	
6	Number of samples			1pc	
7	Voltage of full charged batteries without load			7.3V	
				Equipment Model	Illuminance Meter
					EVERFINE Z-10
Time(min)	4000K Lux *200cm, **60cm	% of Lux	***Lux 200cm Center		Remark
Battery ON	18.2				Charge for 24 H, the green light is on, 100% complete charge, collect the luminance value corresponding to the color temperature at different points in time. *Light cone height 200cm **Radius of the base of the light cone 30cm ***Center of the base of the light cone
0	18.2	100.0%	70.0		
10	10.2	56.0%	39.0		
20	10.2	56.0%	39.0		
30	9.2	50.5%	38.8		
40	9.2	50.5%	38.8		
50	9.2	50.5%	38.8		
60	9.0	49.5%	38.0		
70	9.0	49.5%	38.0		
80	8.8	48.4%	37.0		
90	8.8	48.4%	37.0		
108	0.0	0.0%	0.0		
108	Light off				
Tester: Jinglan Zeng		Auditor: Jinglan Zeng			Approved by: Shunyang Chen
Trend:					

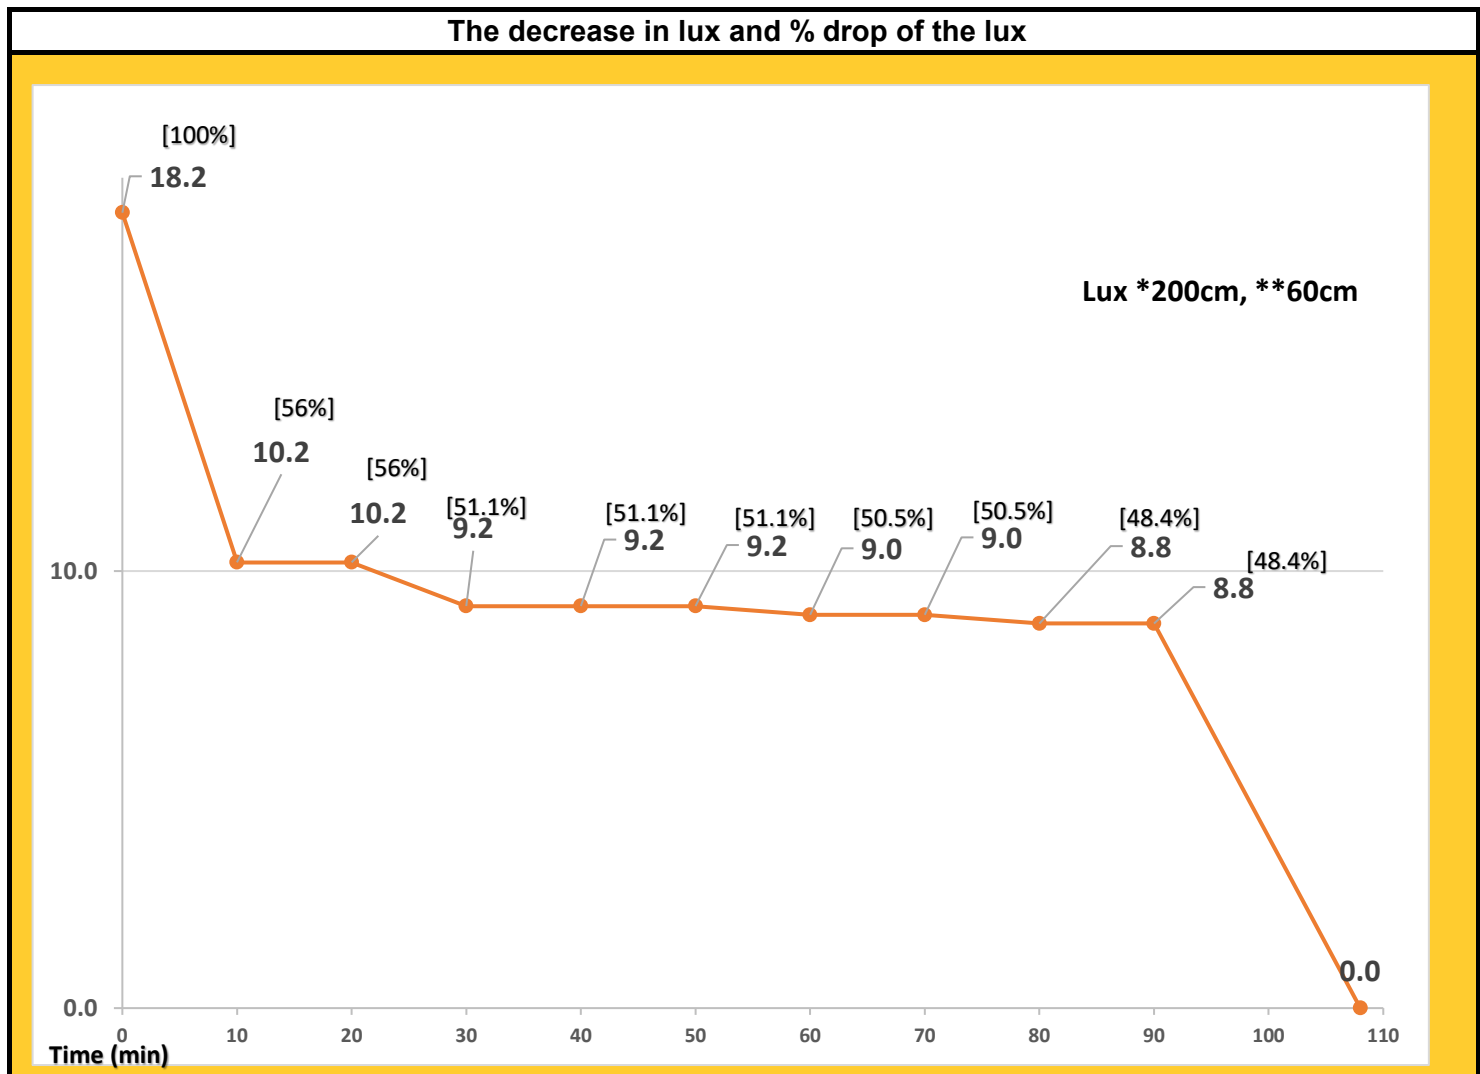

Tester:	Jinglan Zeng			Date:	11/Sep/2023
1	Item number			62/1715/EM, 62/1716/EM, 62/1717/EM	
2	Power source			2pcs IFR18650 2000mAh 3.2V	
3	Input frequency			NA	
4	Power supply properties			Emergency Power Supply	
5	Lux meter			EVERFINE Z-10	
6	Number of samples			1pc	
7	Voltage of full charged batteries without load			7.3V	
				Equipment Model	Illuminance Meter
					EVERFINE Z-10
Time(min)	5000K Lux *200cm, **60cm	% of Lux	***Lux 200cm Center		Remark
Battery ON	18.2				Charge for 24 H, the green light is on, 100% complete charge, collect the luminance value corresponding to the color temperature at different points in time. *Light cone height 200cm **Radius of the base of the light cone 30cm ***Center of the base of the light cone
0	18.2	100.0%	70.0		
10	10.2	56.0%	39.0		
20	10.2	56.0%	39.0		
30	9.2	50.5%	38.8		
40	9.2	50.5%	38.8		
50	9.2	50.5%	38.8		
60	9.0	49.5%	38.0		
70	9.0	49.5%	38.0		
80	8.8	48.4%	37.0		
90	8.8	48.4%	37.0		
108	0.0	0.0%	0.0		
108	Light off				
Tester: Jinglan Zeng		Auditor: Jinglan Zeng			Approved by: Shunyang
Chen					
Trend:					

