



Tester:	Jinglan Zeng			Date:	11/Sep/2023
1	Item number			62/1721/EM, 62/1722/EM, 62/1723/EM	
2	Power source			3pcs IFR18650 2000mAh 3.2V	
3	Input frequency			NA	
4	Power supply properties			Emergency Power Supply	
5	Lux meter			EVERFINE Z-10	
6	Number of samples			1pc	
7	Voltage of full charged batteries without load			11.2V	
				Equipment Model	Illuminance Meter
2700K		% of Lux	***Lux 200cm Center		EVERFINE Z-10
Time(min)	Lux *200cm, **60cm				
Battery ON	30.5				Charge for 24 H, the green light is on, 100% complete charge, collect the luminance value corresponding to the color temperature at different points in time. *Light cone height 200cm **Radius of the base of the light cone 30cm ***Center of the base of the light cone
0	30.5	100.0%	104.2		
10	14.3	46.9%	48.8		
20	14.3	46.9%	48.8		
30	8.8	28.9%	30.1		
40	8.8	28.9%	30.1		
50	8.8	28.9%	30.1		
60	5.1	16.7%	17.6		
70	5.1	16.7%	17.6		
80	5.1	16.7%	17.6		
90	5.1	16.7%	17.6		
214	0.0	0.0%	0.0		
241	Light off				
Tester: Jinglan Zeng Auditor: Jinglan Zeng Approved by: Shunyang Chen					

Trend:


The decrease in lux and % drop of the lux

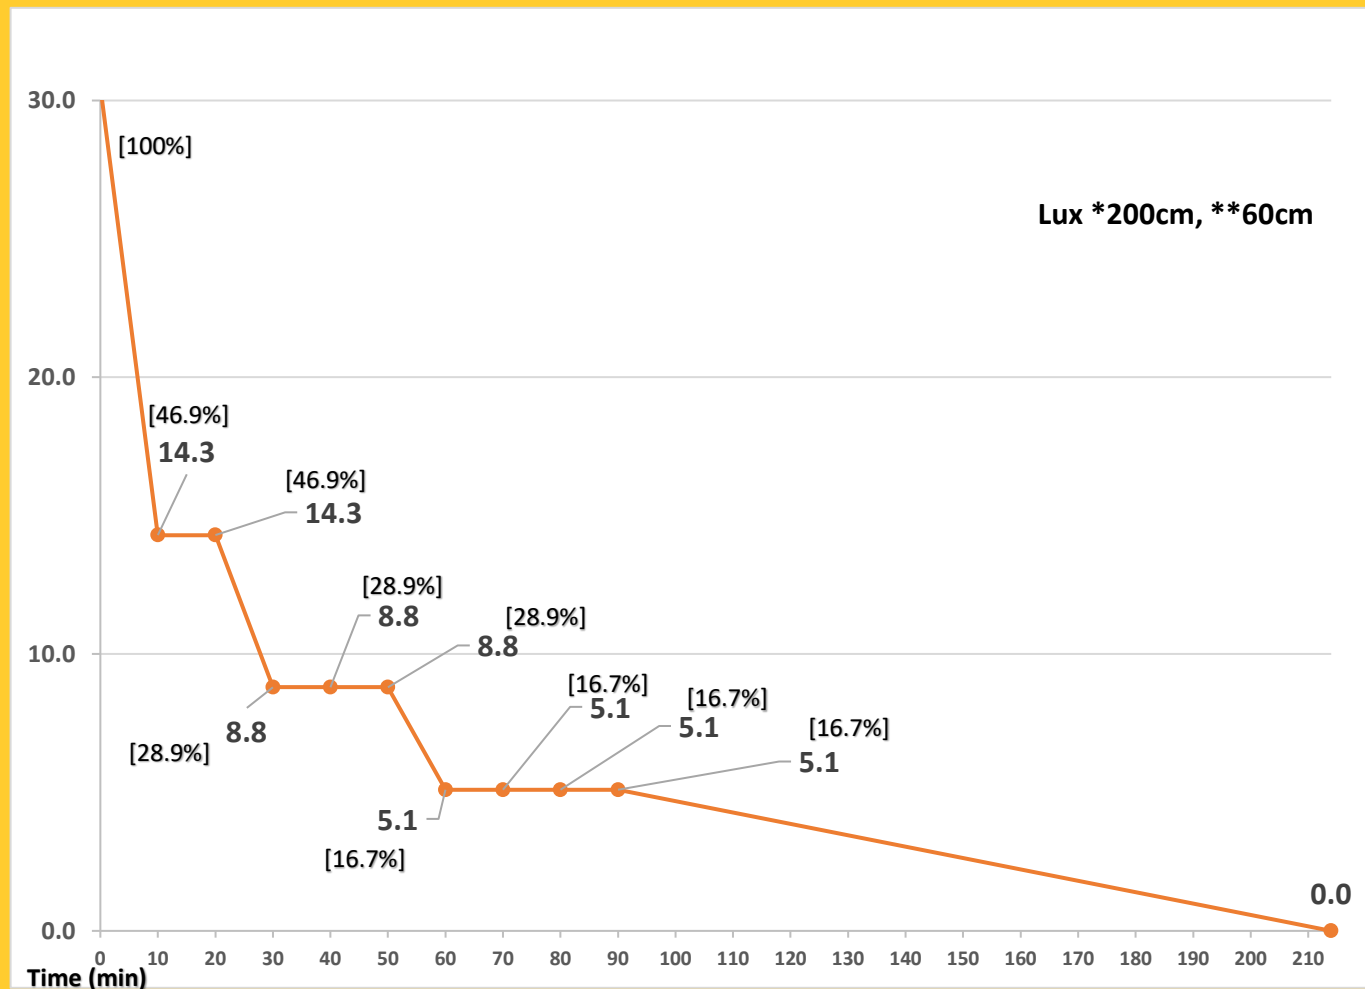


Tester:	Jinglan Zeng			Date:	11/Sep/2023
1	Item number			62/1721/EM, 62/1722/EM, 62/1723/EM	
2	Power source			3pcs IFR18650 2000mAh 3.2V	
3	Input frequency			NA	
4	Power supply properties			Emergency Power Supply	
5	Lux meter			EVERFINE Z-10	
6	Number of samples			1pc	
7	Voltage of full charged batteries without load			11.2V	
				Equipment Model	Illuminance Meter
	3500K	% of Lux	***Lux 200cm Center		EVERFINE Z-10
Time(min)	Lux *200cm, **60cm				Remark
Battery ON	31.1			Charge for 24 H, the green light is on, 100% complete charge, collect the luminance value corresponding to the color temperature at different points in time. *Light cone height 200cm **Radius of the base of the light cone 30cm ***Center of the base of the light cone	
0	31.1	100.0%	106.5		
10	14.5	46.6%	49.6		
20	14.5	46.6%	49.6		
30	9.0	28.9%	30.7		
40	9.0	28.9%	30.7		
50	9.0	28.9%	30.7		
60	5.2	16.7%	17.9		
70	5.2	16.7%	17.9		
80	5.2	16.7%	17.9		
90	5.2	16.8%	17.9		
241	0.0	0.0%	0.0		
241	Light off				
Tester: Jinglan Zeng					

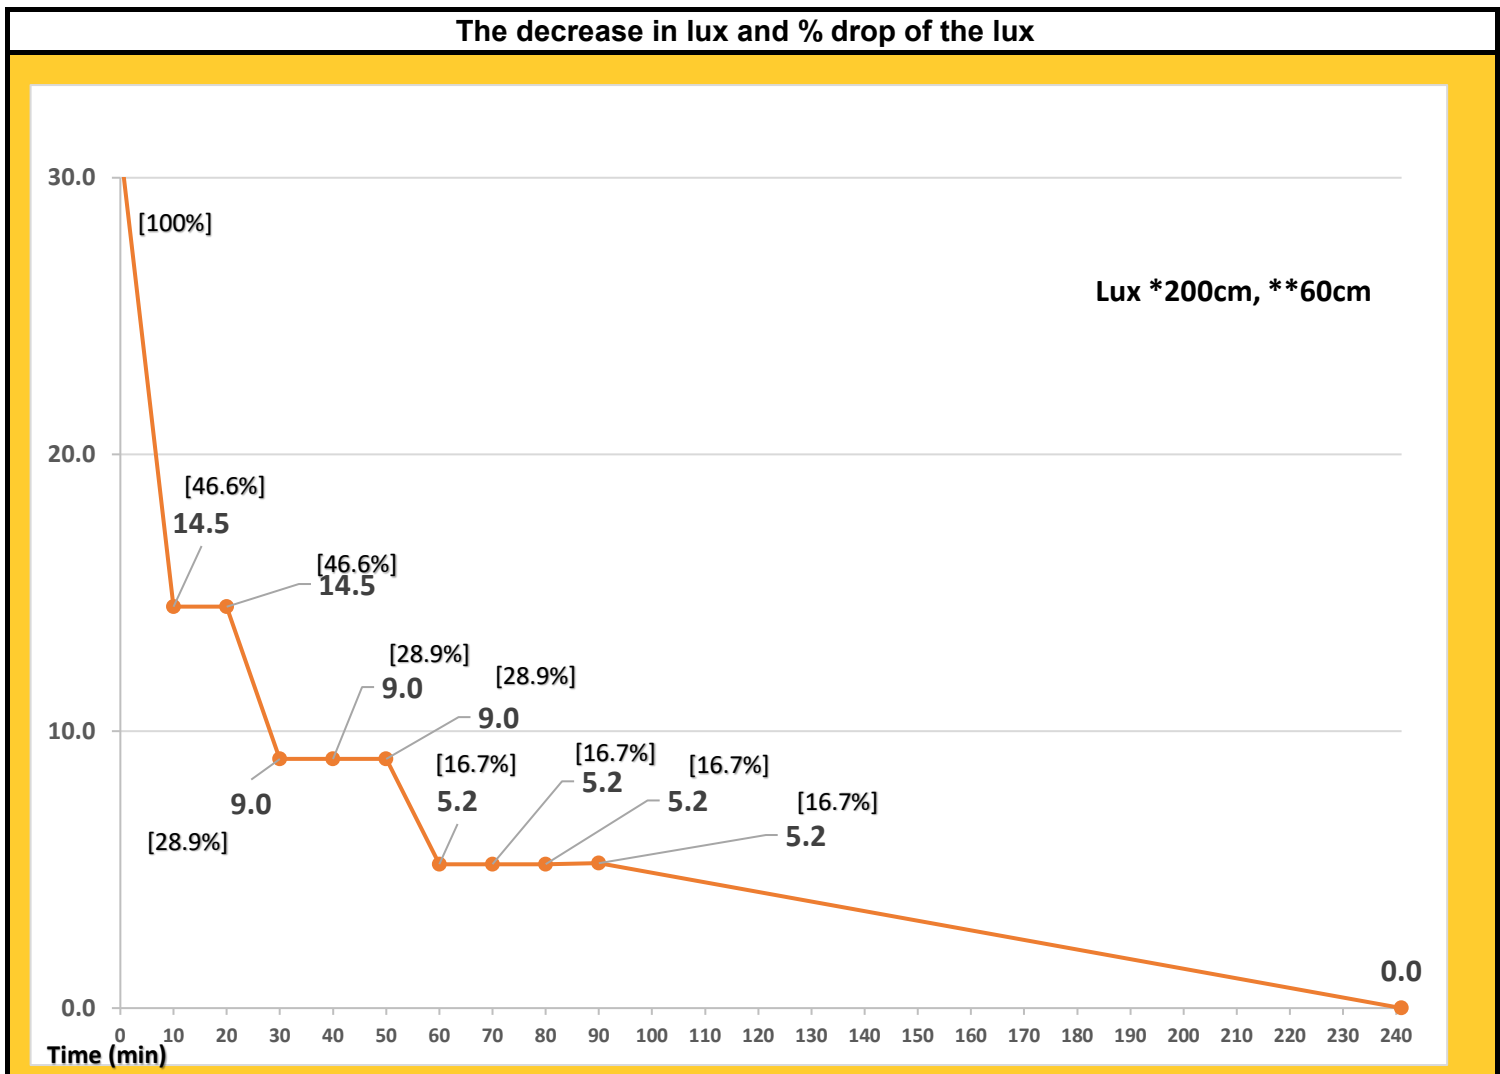

Tester:	Jinglan Zeng			Date:	11/Sep/2023
1	Item number			62/1721/EM, 62/1722/EM, 62/1723/EM	
2	Power source			3pcs IFR18650 2000mAh 3.2V	
3	Input frequency			NA	
4	Power supply properties			Emergency Power Supply	
5	Lux meter			EVERFINE Z-10	
6	Number of samples			1pc	
7	Voltage of full charged batteries without load			11.2V	
				Equipment Model	Illuminance Meter
					EVERFINE Z-10
Time(min)	3000K Lux *200cm, **60cm	% of Lux	***Lux 200cm Center		Remark
Battery ON	26.1				Charge for 24 H, the green light is on, 100% complete charge, collect the luminance value corresponding to the color temperature at different points in time. *Light cone height 200cm **Radius of the base of the light cone 30cm ***Center of the base of the light cone
0	26.1	100.0%	91.6		
10	11.4	43.7%	39.8		
20	11.4	43.7%	40.1		
30	6.7	25.7%	23.4		
40	6.7	25.7%	23.4		
50	6.6	25.3%	23.4		
60	3.5	13.4%	12.2		
70	3.5	13.4%	12.2		
80	3.5	13.4%	12.2		
90	3.5	13.4%	12.2		
241	0.0	0.0%	0.0		
241	Light off				
Tester: Jinglan Zeng		Auditor: Jinglan Zeng			Approved by: Shunyang
Chen					
Trend:					

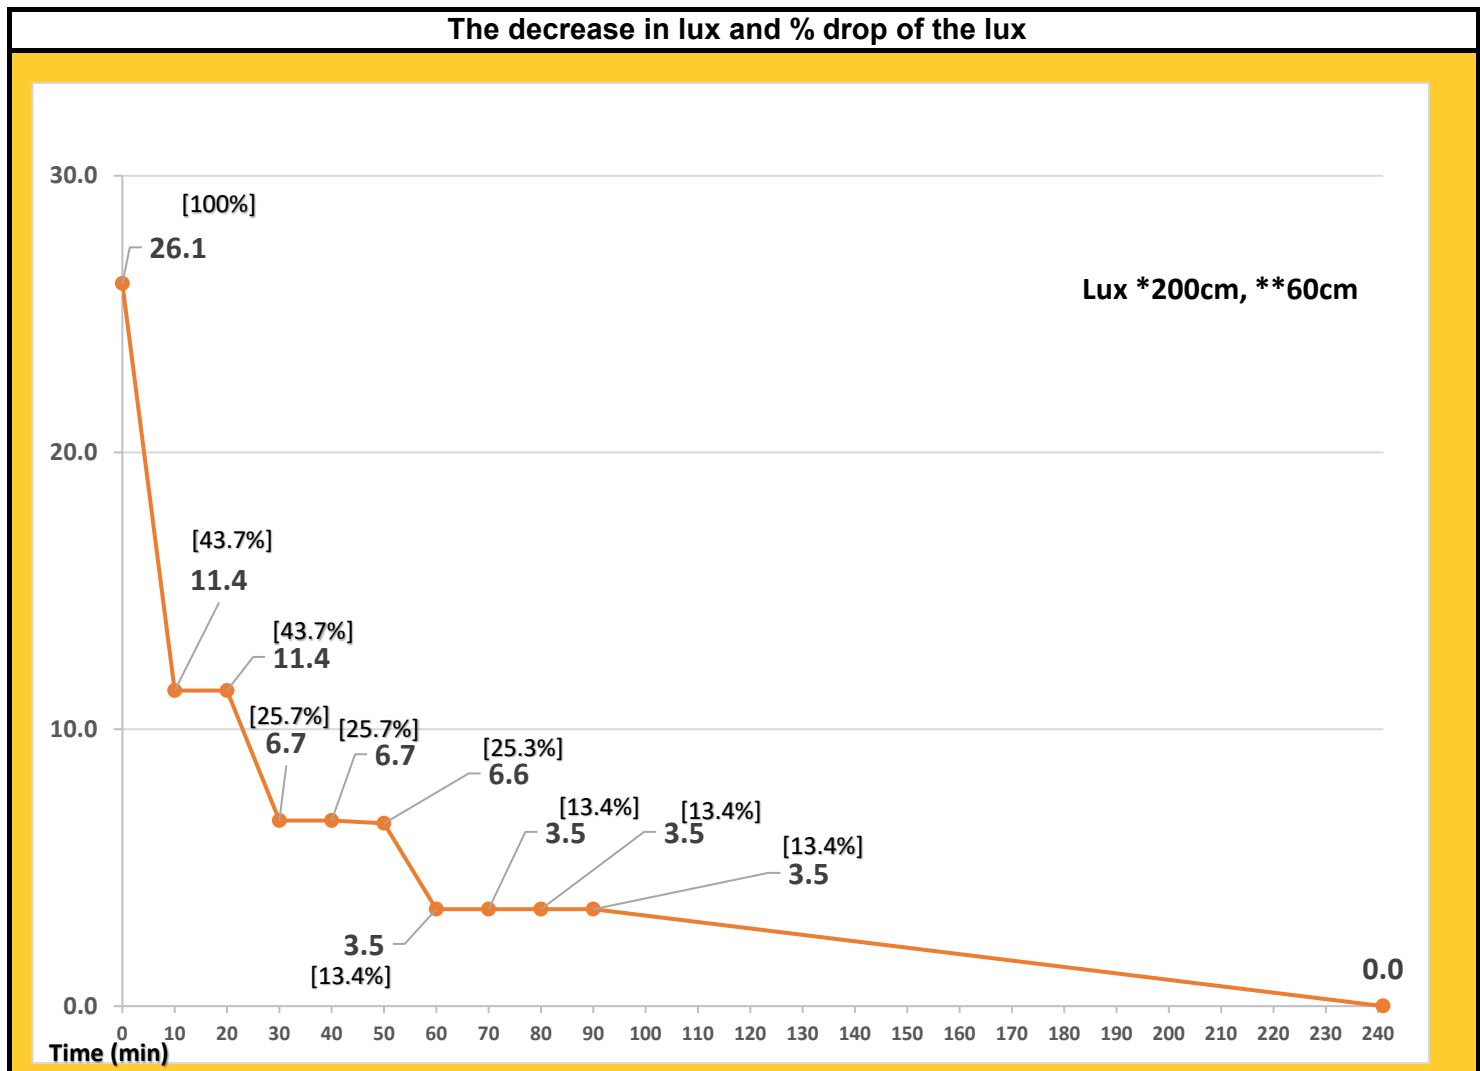

Tester:	Jinglan Zeng			Date:	11/Sep/2023
1	Item number			62/1721/EM, 62/1722/EM, 62/1723/EM	
2	Power source			3pcs IFR18650 2000mAh 3.2V	
3	Input frequency			NA	
4	Power supply properties			Emergency Power Supply	
5	Lux meter			EVERFINE Z-10	
6	Number of samples			1pc	
7	Voltage of full charged batteries without load			11.2V	
				Equipment Model	Illuminance Meter
					EVERFINE Z-10
Time(min)	4000K Lux *200cm, **60cm	% of Lux	***Lux 200cm Center		Remark
Battery ON	31.1				Charge for 24 H, the green light is on, 100% complete charge, collect the luminance value corresponding to the color temperature at different points in time. *Light cone height 200cm **Radius of the base of the light cone 30cm ***Center of the base of the light cone
0	31.1	100.0%	106.4		
10	14.6	46.9%	49.9		
20	14.6	46.9%	50.0		
30	9.0	28.9%	30.8		
40	9.0	28.9%	30.8		
50	9.0	28.9%	30.8		
60	5.3	17.0%	18.2		
70	5.3	17.0%	18.2		
80	5.3	17.0%	18.2		
90	5.3	17.0%	18.2		
241	0.0	0.0%	0.0		
241	Light off				
Tester: Jinglan Zeng		Auditor: Jinglan Zeng			Approved by: Shunyang
Chen					
Trend:					

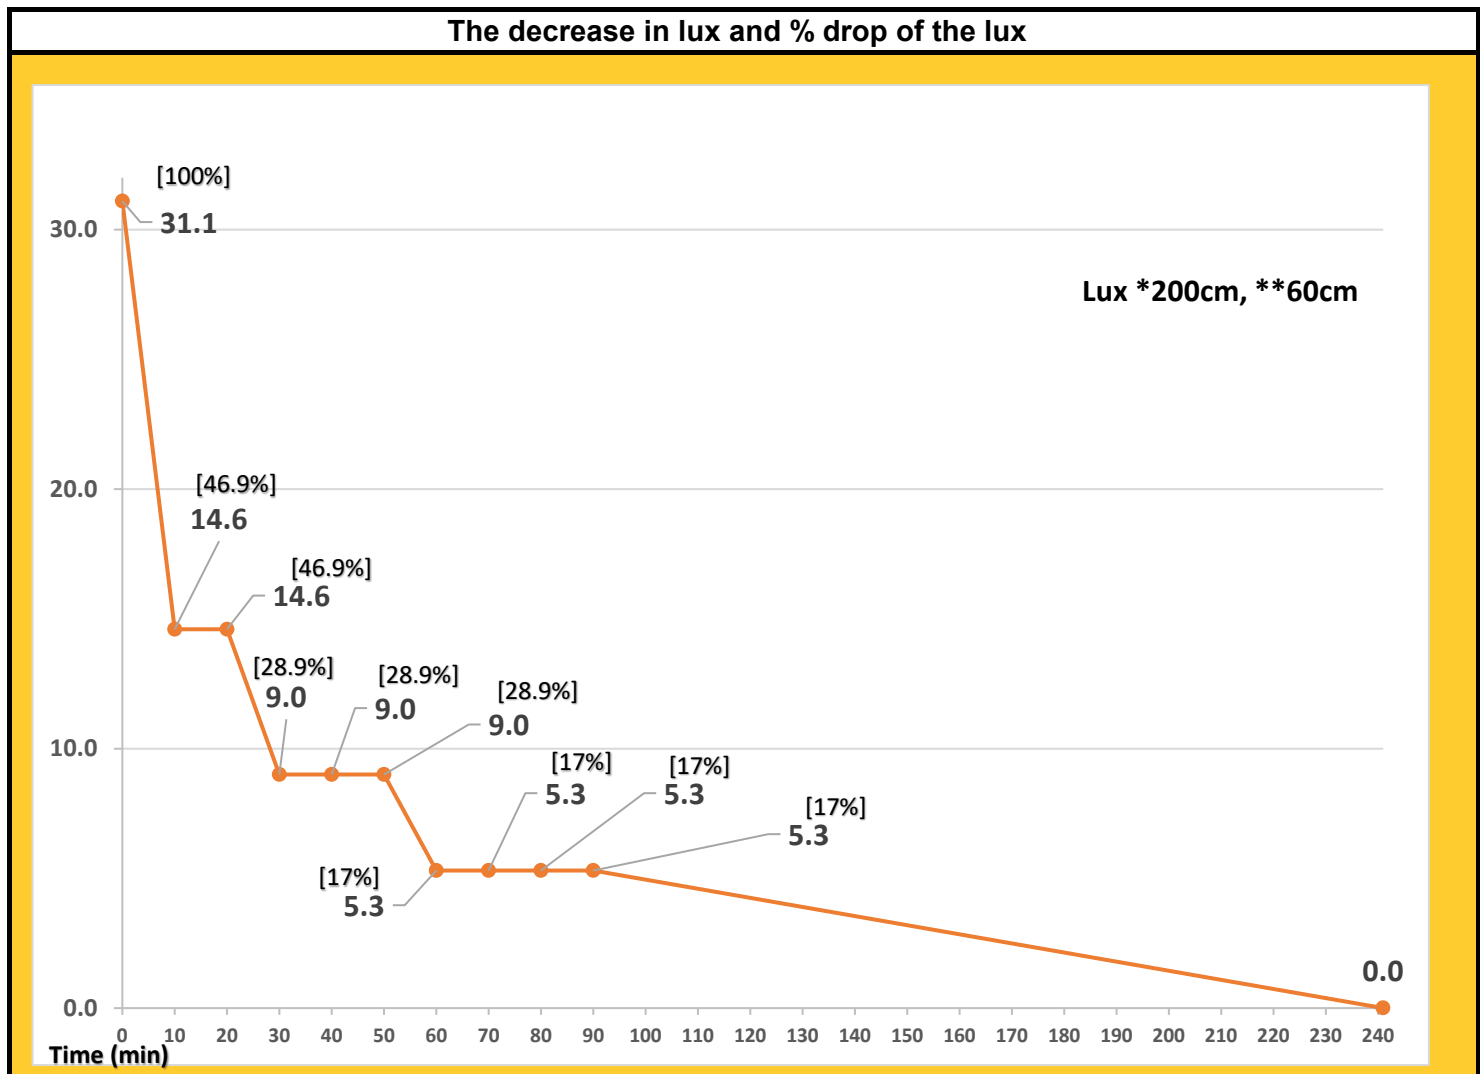

Tester:	Jinglan Zeng			Date:	11/Sep/2023
1	Item number			62/1721/EM, 62/1722/EM, 62/1723/EM	
2	Power source			3pcs IFR18650 2000mAh 3.2V	
3	Input frequency			NA	
4	Power supply properties			Emergency Power Supply	
5	Lux meter			EVERFINE Z-10	
6	Number of samples			1pc	
7	Voltage of full charged batteries without lo			11.2V	
				Equipment Model	Illuminance Meter
	5000K	% of Lux	***Lux 200cm Center		EVERFINE Z-10
Time(min)	Lux *200cm, **60cm				Remark
Battery ON	31.4			Charge for 24 H, the green light is on, 100% complete charge, collect the luminance value corresponding to the color temperature at different points in time. *Light cone height 200cm **Radius of the base of the light cone 30cm ***Center of the base of the light cone	
0	31.4	100.0%	107.3		
10	14.8	47.1%	50.5		
20	14.8	47.1%	50.5		
30	9.2	29.3%	31.3		
40	9.2	29.3%	31.2		
50	9.2	29.3%	31.2		
60	5.4	17.2%	18.3		
70	5.4	17.2%	18.3		
80	5.4	17.2%	18.3		
90	5.4	17.2%	18.3		
241	0.0	0.0%	0.0		
241	Light off				
Tester: Jinglan Zeng		Auditor: Jinglan Zeng		Approved by: Shunyang	
Chen					
Trend:					

