

# 7 BUTTON AC KEYPAD

Models: 87-505



## INSTALLATION AND SAFETY INSTRUCTIONS

**IMPORTANT: Read before installing fixture. Retain for future reference.**



### WARNING: Risk of Fire or Electric Shock

Only authorized, qualified personnel should install this fixture and should follow the owner's manual. Any improper installation might cause failure, electric shock, fire or other injury, damage or hazard. **Turn OFF power at circuit breaker before installing the unit.**

### FEATURES

- Network technology for Bluetooth enabled IOS or Android smartphone.
- Linkable with light groups.
- Manual On/Off/Dim and 4 scenes control of any connected load.
- Compatible with Domino devices.

### WIRING INSTRUCTIONS:

**STEP 1:** Remove wall plate and switch mounting screws.

**STEP 2:** Carefully remove the switch from the switch box. DO NOT disconnect the wires.

**STEP 3:** There are three wiring connections on the switch, these are marked HOT, NEUTRAL, GROUND.

**STEP 4:** Disconnect the wires from the existing switch.

**STEP 5:** Connect the green wire to the GROUND terminal.

**STEP 6:** Connect the white wire to the terminal marked NEUTRAL.

**STEP 7:** Connect the black wire to the terminal marked HOT.

**STEP 8:** Check connections to be sure they are tight and no bare conductors are exposed.


**STEP 9:** Insert the switch into the outlet box carefully.

**STEP 10:** Secure the switch to the outlet box using the supplied screws.

**STEP 11:** Reattach the wall plate.

**STEP 12:** Restore power to the circuit breaker and test the system.

**NOTE:** This Bluetooth device is compatible with Domino lighting systems only.

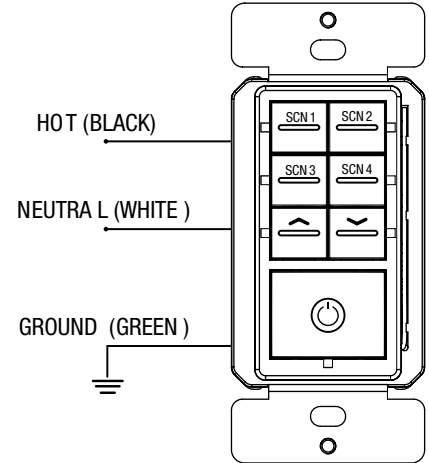

- **Wire Strip Length:** 16mm (5/8 in.)
- The device fits standard outlet boxes.

### SPECIFICATIONS

Voltage	120~277VAC,50/60Hz
Wattage	0.07W
Wire Strip Length	16mm (5/8 in.)
Transmit Line Distance	100ft
Operating Temperature	32°F~104°F

### COMMISSIONING:


**STEP 1:** Follow the instruction to connect Bluetooth Wall Switch to the lights.

**STEP 2:** Press button ⑤ and ⑥ over 3 seconds to enter pairing mode and achieve reset function. This switch can be scanned in next 30 seconds.

**STEP 3:** In App "Switch" page, click to add the switch.

**STEP 4:** Select the light/light group to be controlled by this switch.

**STEP 5:** Detail operation please refer APP instruction.

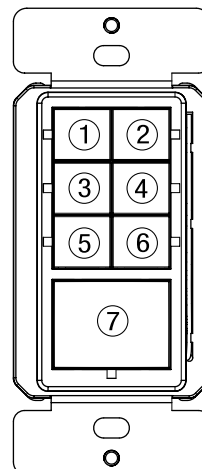

- ① SCN 1
- ② SCN 2
- ③ SCN 3
- ④ SCN 4
- ⑤ DIM+
- ⑥ DIM-
- ⑦ ON/OFF

Scan below QR code for downloading the APP.



## How to Control Lights with a Phone?

Scan to download APP instruction.



**NOTE: This sensor is Bluetooth® compatible.** The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by SATCO Products, Inc., is under license. Other trademarks and trade names are those of their respective owners.

**WARRANTY:** This product is guaranteed for a 5-year warranty. Any quality issue in normal use within the warranty period, will be repaired or replaced according to the situation and under the condition specifications can be provided. Visit [www.Satco.com](http://www.Satco.com) for full warranty details and dimmer compatibility information.