ARCHITECTURAL NUVO® LIGHTING

A Satco Product

c UL® us LISTED

NUVO NUMBER 65/001(WM103) **Lamp not included (USE 70W HPS)**

INSTALLATION INSTRUCTION

Wall Pack Series

WARNING

DISCONNECT POWER DURING INSTALLATION AND BEFORE SERVICING.
READ ALL INSTRUCTIONS COMPLETELY BEFORE STARTING INSTALLATION.

INSTALLATION:

1. REMOVE FRONT HOUSING (Fig. 1)
   Loosen two screw on the housing. Remove front housing.
2. REMOVE REFLECTOR (Fig. 2)
   Loosen two screws enough to allow reflector to slide upward to remove reflector.
3. MOUNTING WITH TWO BOLTS (Fig. 3)
   Knock out two slugs "C" in rear housing. Mount with two lag screws.
4. MOUNTING ON OUTLET BOX
   Knock out appropriate holes around outlet hole in rear housing. Fasten the rear housing to the outlet box using the screws supplied with the outlet box.
5. ELECTRICAL CONNECTIONS.
   Make wiring connections by connecting white fixture wire to white Service wire, 120 volt fixture black wire to black service wire. Make sure that there are no loose wire strands sticking out of wire nuts. Connect the ground lead from the service by hooking it around the green grounding screw "F" between the screw head and the brass terminal washer. Tighten the screw securely.
6. INSTALL LAMP
   Replace reflector and place lamp into lamp socket, and install lamp securely into lamp socket until it seals firmly.
7. REPLACE FRONT HOUSING
   Replace front housing by reversing procedure used to remove it.

BOTTOM CONDUIT HOLE (Optional):
With front housing and reflector off, Either frill or tap out recessed Indention in bottom of rear housing. Pull service wires through bottom of conduit hole and make connections under wiring. Replace reflector and front housing by reversing procedures used to remove.

IMPORTANT:
To weather-proof your outdoor installation, be sure to seal the top and two sides of the fixture, except the bottom of the fixture.

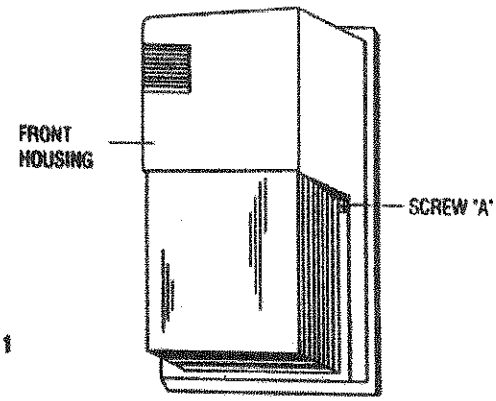

FIG. 1

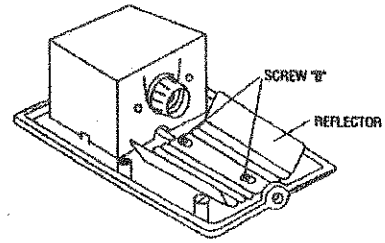

FIG. 2

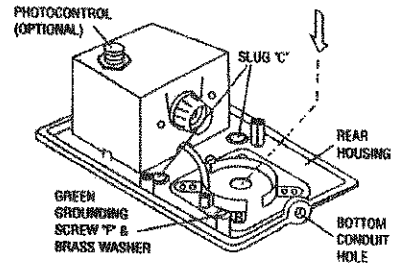

FIG. 3

REPLACING LAMP

CAUTION - DISCONNECT ELECTRICAL CIRCUIT BEFORE REPLACING LAMP.

1. **Loosen the refractor screws to release the refractor.**
2. **Replace with the correct lamp (70W HPS).**
3. **Close refractor and re – install screws.**

Satco Products Inc., Brentwood. NY11717