

How to bypass the dimming cable for standard 0-10V dimming applications.

Models: 65/770R1, 65/771R1

Step 1: Cut free the 0-10v cable leading from the Wattage selectable controller box to the top of the UFO fixture LED driver, see **Figure 1**.



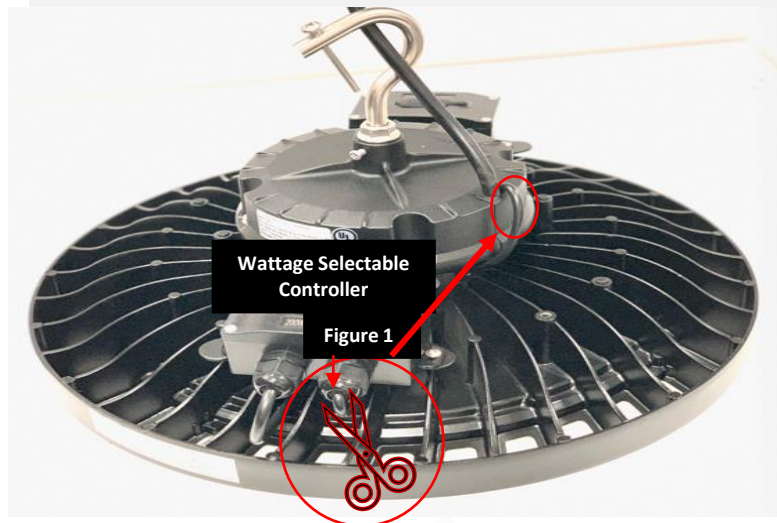


Image for reference only
0-10V Class 2 wiring

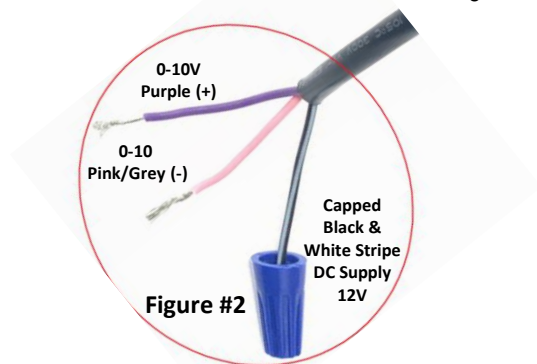

Step 2: Once the dimming cable is cut free from the wattage controller box; strip the insulator to access the 0-10V dimming wires, Purple (+), Pink (-), Black with White Stripe (DC Power Supply) must be capped when using standard 0-10V controls, See **Figure #2**

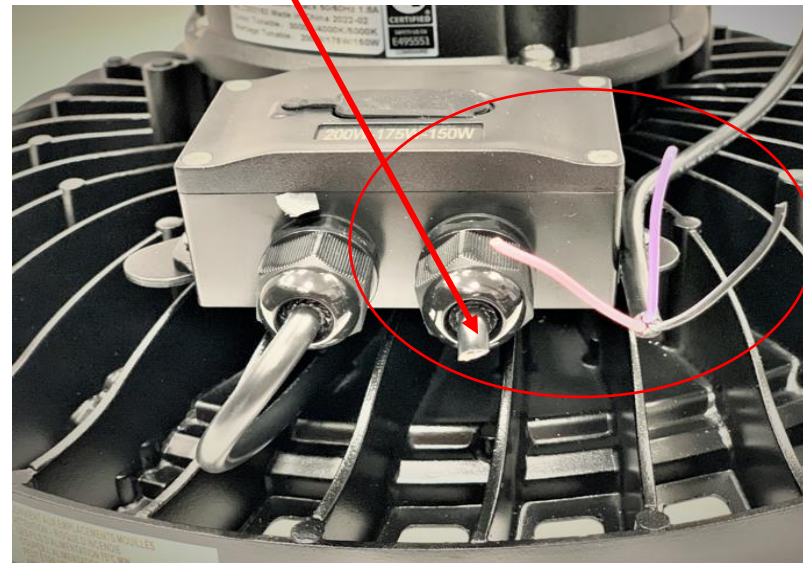

Note: The UFO led high bay light fixture can be equipped with an optional DC motion sensor (86/218) the sensor needs to be set via remote (86/219). For Standard 0-10V dimming application, the dimming cable must be cut free from the Wattage Selectable Controller box.

Optional 0-10V Supply extension 65/169