

SIDE MOUNT DRIVER TRACK HEAD

Models: JH6001, JH6002



INSTALLATION AND SAFETY INSTRUCTIONS

IMPORTANT: Read before installing fixture. Retain for future reference.

WARNING: Risk of Fire or Electric Shock

- Do not touch or remove the track head on the track when the light is on.
- Turn OFF power before installation or maintenance.

IMPORTANT SAFETY INSTRUCTIONS

When installing or using the lighting system, basic safety precautions should always be followed, including:

1. Read all instructions before attempting installation.
2. Do not install this track in damp or wet locations, use only in dry, well-ventilated indoor areas away from water sources.
3. Do not cut any portion of this track head.
4. Do not install any part of a track system less than five (5) feet above the floor.
5. Do not install any fixture assembly closer than six (6) inches from any curtain, or similar combustible material.
6. Disconnect electrical power before adding to, or changing the configuration of the track.
7. Do not attempt to energize anything other than lighting track fixtures on the track. To reduce the risk of fire and electric shock, do not attempt to connect power tools, extension cords, appliances, and the like to the track.

Meets requirements of ICES-005 issue 5 class B for use in residential and commercial applications.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

INSTALLATION:

1. Before installing the track head, refer to the track installation instructions to make sure the track head and the track are compatible. NOTE: This track head is compatible with "J" type track.
2. Turn OFF switch at main power source before installing any track or fitting.
3. Pull down the locking lever and insert "Adapter Contact" into the slot in the track. See Figure 1.
4. Rotate adapter clockwise 90° to locked position. NOTE: The tab with the "P" should point towards the Polarity line.
5. Adjust the CCT switch to select the appropriate color temperature. Adjust the WATTAGE switch to select the desired wattage setting. See Figure 2.
6. To remove, press the locking lever on the track adapter and turn the track head counter clockwise 90°.

Figure 1


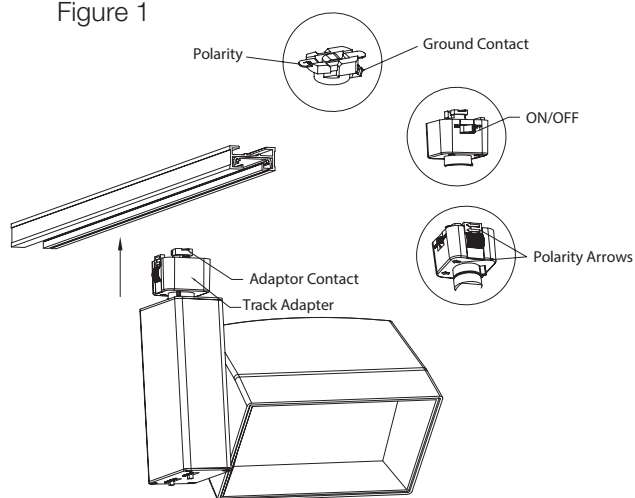


Figure 2

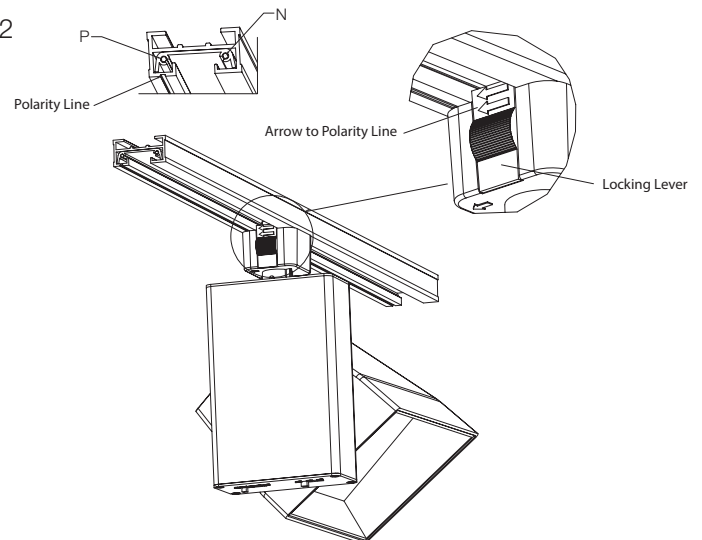

Installation instructions continued on page 2.