


Wiring instructions for Integration of the 86/211 PIR Sensor with Emergency Battery backup fixtures 65/1152, 65/1153, 65/1155, 65/1156.

- Turn off electrical power at the fuse or circuit breaker box before wiring the PIR Motion sensor.

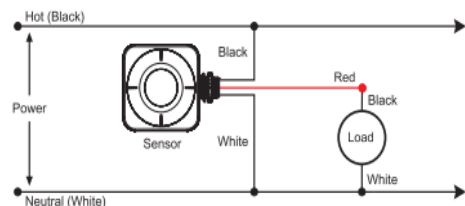

Step 1. Connect the Black wire from the sensor to the main AC Hot Lead (L)

Step 2. Connect the Red wire from the sensor to the Black wire lead on the fixture LED driver labeled (Line Switched)

Step 3. Connect the White wires from the Sensor, Fixture driver, and Emergency driver to the main AC Neutral line.

Step 4. Connect all of the ground wires.

Emergency Wiring Diagram

