



# INSTALLATION INSTRUCTIONS

READ IMPORTANT SAFETY TIPS BEFORE PROCEEDING WITH INSTALLATION


## SAFETY TIPS




Turn fixture off! (Place wall switch in off position, if fixture has built-in switch or chain pull, switch or pull chain so fixture is off.)




Next - go to the main fuse box. If your fuse box has an ON/OFF switch, simply place main power switch in OFF position.




Screw-in type fuses - unscrew the fuse or fuses that control the power to the fixture or room you are working in.

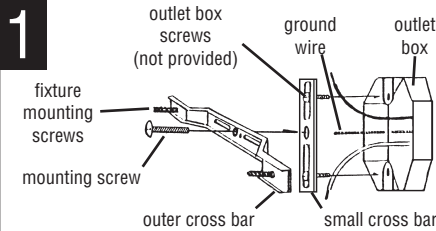


**1** ATTACH small cross bar to outlet box with outlet box screws (8-32 x 1/2, screws not provided). THREAD fixture mounting screws (8-32 x 1,2 provided) into large cross bar. ATTACH large cross bar to small cross bar with mounting screw (1/4 - 20 x 3/8,1 provided).

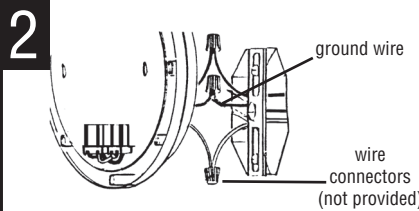

**2** CONNECT THE WIRES. NOTE: Attach black fixture wire to black supply wire, white fixture wire to white supply wire. Do not mix them up. Use approved electrical tape or wire connectors (not provided). Connect bare fixture ground wire to ground wire from outlet box. NEVER CONNECT GROUND WIRE TO BLACK OR WHITE POWER SUPPLY WIRES.

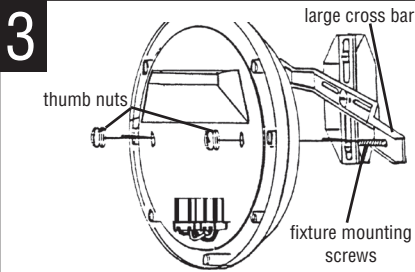

**3** POSITION THE FIXTURE over large cross bar and secure in place with thumb nuts (2 provided). Insert compact type lamps rated 9 watts into sockets. Be sure to use compact type lamps with wattage no greater than specified for this fixture.

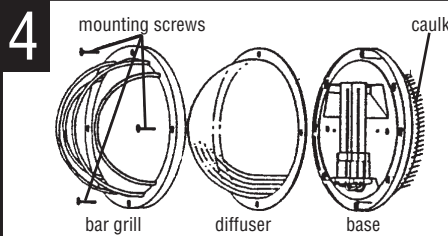


**4** PLACE DIFFUSER ON FIXTURE BASE. Then place bar grill or frame over diffuser and attach to base with mounting screws (8-32 x 1/2, 4 combination head screws provided). NOTE: Outdoor wall fixture MUST be caulked with an acrylic caulk where base of fixture meets mounting surface. This provides a water tight seal when fixture is installed.

**COLD WEATHER STARTING INFORMATION:** For temperatures below 25°F leave the PL9 lamp(s) on continuously - starting with warm lamps. NOTE: If lamp starting becomes a problem in any cold weather applications; remove the lamp(s) from fixture - bring the lamp(s) indoors so that they become warm - then re-install the lamp(s) into fixture and leave fixture on continuously. Do not place lamp(s) in an oven, microwave or similar heat producing device.

**NOTE:** Be sure wires exiting the back of fixture are not pinched between the back of fixture and ceiling or wall.



**CORRECT**  
Wires **MUST** lay in this slot



**INCORRECT**

**NOTE:** Following warning applies to ceiling installation only.  
**WARNING - RISK OF FIRE, MOST DWELLINGS BUILT BEFORE 1985 HAVE SUPPLY WIRE RATED 60°C. CONSULT A QUALIFIED ELECTRICIAN BEFORE INSTALLING. FOR SUPPLY CONNECTIONS, USE WIRE RATED FOR AT LEAST 90°C.**




Clean only with mild soap and water. Avoid spraying with Cleansers, Insecticides, and Pesticides that are petroleum based hydrocarbon products. These will degrade luminaire.

IS010PL Rev B

# INSTALLATION INSTRUCTIONS

READ IMPORTANT SAFETY TIPS BEFORE PROCEEDING WITH INSTALLATION


## SAFETY TIPS




Turn fixture off! (Place wall switch in off position, if fixture has built-in switch or chain pull, switch or pull chain so fixture is off.)




Next - go to the main fuse box. If your fuse box has an ON/OFF switch, simply place main power switch in OFF position.




Screw-in type fuses - unscrew the fuse or fuses that control the power to the fixture or room you are working in.

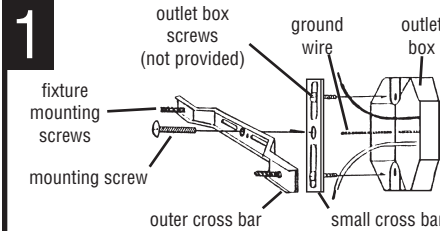


**1** ATTACH small cross bar to outlet box with outlet box screws (8-32 x 1/2, screws not provided). THREAD fixture mounting screws (8-32 x 1,2 provided) into large cross bar. ATTACH large cross bar to small cross bar with mounting screw (1/4 - 20 x 3/8,1 provided).

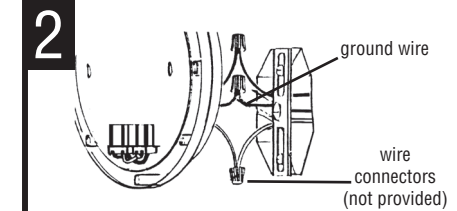

**2** CONNECT THE WIRES. NOTE: Attach black fixture wire to black supply wire, white fixture wire to white supply wire. Do not mix them up. Use approved electrical tape or wire connectors (not provided). Connect bare fixture ground wire to ground wire from outlet box. NEVER CONNECT GROUND WIRE TO BLACK OR WHITE POWER SUPPLY WIRES.

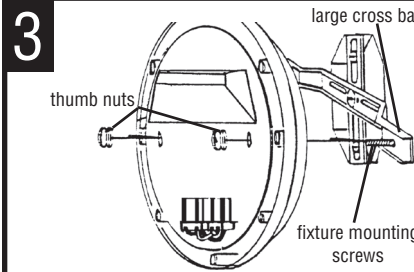


**3** POSITION THE FIXTURE over large cross bar and secure in place with thumb nuts (2 provided). Insert compact type lamps rated 9 watts into sockets. Be sure to use compact type lamps with wattage no greater than specified for this fixture.

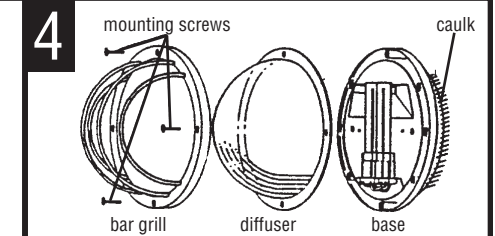


**4** PLACE DIFFUSER ON FIXTURE BASE. Then place bar grill or frame over diffuser and attach to base with mounting screws (8-32 x 1/2, 4 combination head screws provided). NOTE: Outdoor wall fixture MUST be caulked with an acrylic caulk where base of fixture meets mounting surface. This provides a water tight seal when fixture is installed.

**COLD WEATHER STARTING INFORMATION:** For temperatures below 25°F leave the PL9 lamp(s) on continuously - starting with warm lamps. NOTE: If lamp starting becomes a problem in any cold weather applications; remove the lamp(s) from fixture - bring the lamp(s) indoors so that they become warm - then re-install the lamp(s) into fixture and leave fixture on continuously. Do not place lamp(s) in an oven, microwave or similar heat producing device.

**NOTE:** Be sure wires exiting the back of fixture are not pinched between the back of fixture and ceiling or wall.



**CORRECT**  
Wires **MUST** lay in this slot



**INCORRECT**

**NOTE:** Following warning applies to ceiling installation only.  
**WARNING - RISK OF FIRE, MOST DWELLINGS BUILT BEFORE 1985 HAVE SUPPLY WIRE RATED 60°C. CONSULT A QUALIFIED ELECTRICIAN BEFORE INSTALLING. FOR SUPPLY CONNECTIONS, USE WIRE RATED FOR AT LEAST 90°C.**



Clean only with mild soap and water. Avoid spraying with Cleansers, Insecticides, and Pesticides that are petroleum based hydrocarbon products. These will degrade luminaire.

IS010PL Rev B