

# LED Flat panel fixture (2 packs)

Even, consistent light.  
Low maintenance.  
High efficiency.


## Applications / Features

- DLC 4.2 certified
- Maintenance free—no bulb to change
- Perfect, even light distribution
- Flicker-free driver
- CRI >80
- Ultra-slim edge-lit design
- Stamped and reinforced back plate
- Lasts 50,000 hours of continuous use
- 0-10V dimming
- Universal input voltage—100-277V
- 3500K, 4000K and 5000K versions
- Suspended\* or drop into T-bar grid
- Certified for damp locations
- 5 year warranty†

# PRODUCT INFORMATION



2 X 4

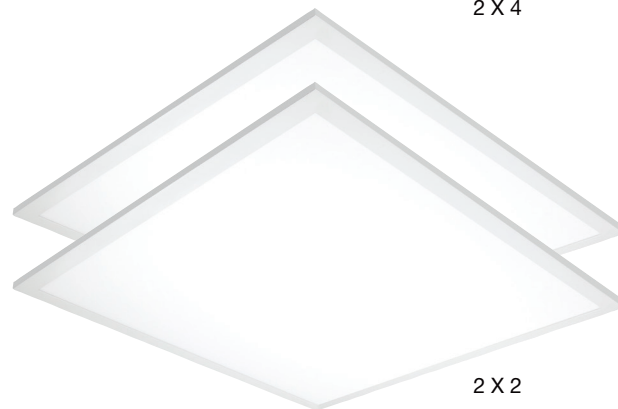

2 X 2



LED flat panel flush mount ceiling frame kits

### Accessories



LED flat panel suspension kit\*



## LED Flat Panel



Item Number	Lamp Description	W	Voltage	CRI	CCT	Lm	Life/Hrs.	UPC	Pack
65-321	2FT X 2FT LED FLAT PANEL 40 WATT	40	100-277	>80	3500K	4155	50K	045923453212	2
65-322	2FT X 2FT LED FLAT PANEL 40 WATT	40	100-277	>80	4000K	4194	50K	045923453229	2
65-323	2FT X 2FT LED FLAT PANEL 40 WATT	40	100-277	>80	5000K	4331	50K	045923453236	2
65-324	2FT X 4FT LED FLAT PANEL 50 WATT	50	100-277	>80	3500K	4906	50K	045923453243	2
65-325	2FT X 4FT LED FLAT PANEL 50 WATT	50	100-277	>80	4000K	4968	50K	045923453250	2
65-326	2FT X 4FT LED FLAT PANEL 50 WATT	50	100-277	>80	5000K	5139	50K	045923453267	2

Accessories										
Item Number	Description	Dimensions			Finish	UPC	Pack			
65-361	1X4 LED FLAT PANEL FRAME KIT	47 5/8" L x 11 5/8" W x 3" D			White	045923559501	10/1			
65-362	2X2 LED FLAT PANEL FRAME KIT	23 5/8" L x 23 5/8" W x 3" D			White	045923559518	10/1			
65-363	2X4 LED FLAT PANEL FRAME KIT	47 5/8" L x 23 5/8" W x 3" D			White	045923559525	10/1			
65-367	FLAT PANEL SUSPENSION KIT				White	045923559532	100/1			

\* Suspension kit sold separately. \*\* Sold in 2 packs only.  
† Go to [www.satco.com](http://www.satco.com) for complete warranty information.

## Specifications

ITEM	SPECIFICATION	DETAILS
General Performance	Spacing Criteria	Available upon request
	Efficacy (LM/W)	100lm/w   100lm/w
	CRI	>80
	Color Consistency	Proprietary binning for uniform color
	Lumen Maint. (L70)	50,000 hours
Electrical	Power Factor	Over 95%
	Input Voltage	100V-277V 50/60 Hz
	Power Consumption	40&50 Watt nominal
Control	Dimming Switch	Standard 0-10V dimming 10%-100%
	Linking/Qty.	15 Cable Feet x 18 Panels
Physical	Dimensions	2 x 2 — 23.6" x 23.6" x 1.8" / 2 x 4 — 23.6" x 47.6" x 1.8"
	Weight	2 x 2 — 8.5 lbs. / 2 x 4 — 12.7 lbs.
	Housing	Aluminum
	Mounting	Fits standard grid for drop ceilings
	Operating Temperature	-5°F to 104°F
	Humidity	20% - 85% RH, non condensing
Certification	Certification	cULus, DLC, Fcc
	Material Usage	RoHS compliant; no mercury
	Environment	Damp location
	Warranty*	Five year

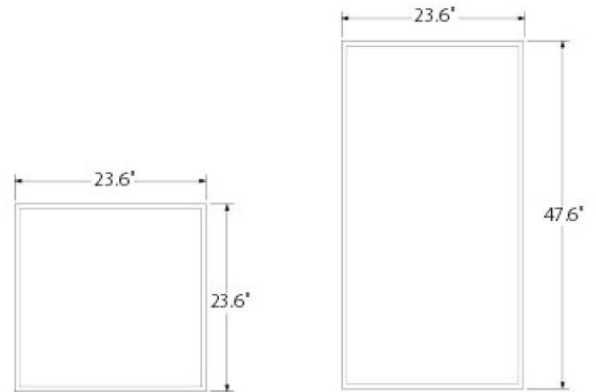

## 0-10V Dimmer Compatibility

Brand	Description	Model	Load Max	Poles	Performance Rating
Lutron	Diva 0-10V control (gloss finish), single pole, preset, 30mA sink, 16A load (needs Power Pack PP-DV)	DVTV (DIVA)	120-277 30mA/16A	Single	Best
Lutron	Diva 0-10V control (gloss finish), single pole/3-way, preset, 50mA sink, 8A load	DVSTV (DIVA)	120-277 50mA/8A	Single pole/3-way	Best
Lutron	Diva 0-10V control (satin finish), single pole, preset, 30mA sink, 16A load (needs Power Pack PP-DV)	DVSCSTV (DIVA)	120-277 30mA/16A	Single	Best
Lutron	Diva 0-10V control (Satin finish), single pole/3-way, preset, 50mA sink, 8A load	DVSCSTV (DIVA)	120-277 50mA/8A	Single pole/3-way	Best
Lutron	Maestro 0-10V Dimmer and Occupancy/Vacancy PIR Sensor, single pole/multi location	MSZ101-WH	120-277	Single pole/Multi	Better
Lutron	Skylark Fluorescent Preset Dimmer, 120V dimmers also LED compatible with GRX-TVI	SF-103P-WH	120VAC/8A	3-way	Better
Cooper	Dimmable LED/FLR0-10V ballasts, DEVINE Slide Dimmer, single pole/3-way, preset	DF10P	1200W 120V/60Hz 1600W 277V/60Hz	Single pole/3-way	Best
Cooper	Dimmable LED/FLR0-10V ballasts, SKYE Slide Dimmer, single pole/3-way, preset	SF10P	1200W 120V/60Hz 1600W 277V/60Hz	Single pole/3-way	Best
Leviton	Designed for use with LED fixtures Using 0-10V power supplier, No power pack req. for switching	DS710	120VAC/60Hz 277VAC/60Hz		Best
Leviton	LED Dimmer for 0-10V power suppliers, no LED locator	IP710-LF	1200VA@120VAC 1500VA@277VAC	Single/2Gang/ 3-Gang	Best
Leviton	Renoir II Rotary, Ballast 0-10V, Standard Heat Sink Dimmer, Linear dimming, Narrow, 16 A, White	WRMG-7DW	120-277VAC 60HZ/16A		Better
Leviton	1200VA Preset Fluorescent Slide Dimmer, Single Pole and 3-Way	IP710-DLX	1200VA, 120/277 Volt AC60Hz	Single pole/3-way	Better
Leviton	Renoir II Preset Slide Dimmer, Linear dimming, Ballast 0-10V, Thin Heat Sink, Narrow, 16A, White	AWSMT-7DW	120-277VAC, 60HZ/16A		Limited
Leviton	Fluorescent Renoir II Slide Preset Master Dimmer	AWSMG-7DW	0-277VAC, 60HZ/16A		Limited