
SATCO NUVO



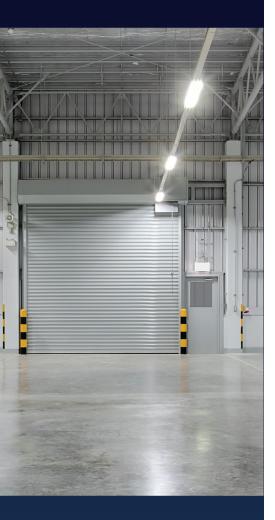

120V-277V RANGE VOLTAGE

DAMP LOCATION RATED

2kV SURGE PROTECTION

PIR SENSOR CAPABLE

ENERGY STAR CERTIFIED

5 YEAR WARRANTY

SUGGESTED APPLICATIONS

Commercial, Industrial, Garages and Warehouses

LED DOUBLE STRIP LIGHTS

2', 4' & 8'



Transition seamlessly to LED lighting with SATCO|NUVO's Double Strip Lights - a hassle-free upgrade harnessing the advantages of LED technology. Designed to match the form factor of traditional fluorescent fixtures, these lights are perfect for both retrofit applications and new installs. With push-to-release access to the wiring and mounting compartment, installations will be simplified as additional tools and time to disassemble is not necessary. Our LED strip lights, available in lengths of 2', 4', and 8', provide an ideal match for any environment. For added convenience, all fixtures can be either surface mounted or suspension mounted, with an optional mounting kit sold separately.













GENERAL SPECIFICATIONS

Input Voltage, Frequency: 120V-277V, 50/60Hz

CCT: 4000K

Surge Protection: 2kV

CRI: 80

Temperature: Cool White

Ambient Operating Temperature: $-20^{\circ}\text{C} (-4^{\circ}\text{F}) \text{ to } +40^{\circ}\text{C} (+104^{\circ}\text{F})$

Construction: Steel

Lens Material: Polycarbonate Functional Life: 50,000 Hours Location Rating: Damp location

Warranty: 5 Years

ITEM SPECIFICATIONS / ORDER INFO

Item	Description	Watts	Lumens	Efficacy	UPC
65-1070	2' LED DOUBLE LIGHT STRIP	20W	2200lm	110 LPW	045923610707
65-1071	4' LED DOUBLE LIGHT STRIP	43W	4750lm	110 LPW	045923625503
65-1072	8' LED DOUBLE LIGHT STRIP	78W	9000lm	115LPW	045923653681









DIMENSIONS

Item	A - Height	B - Length	C - Width	
65-1070	2.48"	24.02"	3.58"	
65-1071	2.48"	48.03"	3.58"	
65-1072	2.48"	96.06"	3.58"	





ACCESSORIES


Item	Description	UPC	
86-211	PIR SENSOR	045923862113	
65-1073	2' & 4' SUSPENSION KIT	045923653698	
65-1074	8' SUSPENSION KIT	045923653704	





PIR Sensor

Suspension Kit

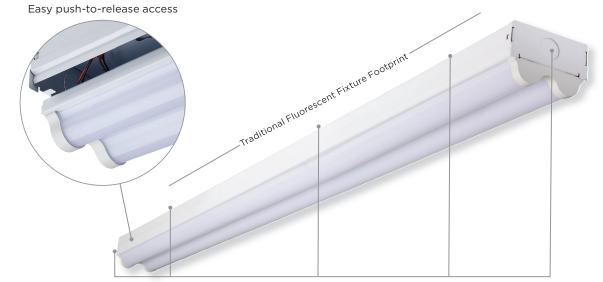

2' and 4' has (5) 1/2" Wiring Knockouts 8' has (7) 1/2" Wiring Knockouts

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.