



**3000K/4000K/5000K CCT
SELECTABLE**

WATTAGE SELECTABLE

**INTEGRATED BYPASSABLE
PHOTOCELL AND
SURGE PROTECTION**

TEMPERED GLASS

0-10V DIMMABLE

IP66

50,000 HRS

SUGGESTED APPLICATIONS

Commercial/Industrial
General Site Lighting
Landscape
Sign Illumination
Pathway/Walkways

LED TEMPERED GLASS FLOOD LIGHT

CCT AND WATTAGE SELECTABLE



Wattage Selectable
Low/Medium/High

CCT Selectable
Switch to/from the following CCT

3000K 4000K 5000K

Knuckle Mount

15W/25W/35W
(65-541 Shown)
45W/60W/80W
(65-542)



Mounting Plate
Included

Integrated
Bypassable
Photocell
with On/Off
Switch



Moisture
Respirator

Impact
Resistant
Glass Lens

Slipfitter Mount

Comes standard on
100W/125W/150W
(65-543)

HIGH PERFORMANCE AND FIELD SELECTABLE

Satco's LED Tempered Glass Flood Lights are CCT and wattage selectable allowing you to visualize and customize any environment. These fixtures are IP66 rated to withstand harsh weather conditions, and the highly durable tempered glass offers better light distribution where security and safety is key. With built-in surge protection and an integrated bypassable photocell these fixtures are an ideal solution for a variety of applications.

GENERAL SPECIFICATIONS

Input Voltage, Frequency: 120-347V, 50/60Hz

Power Factor, THD %: >0.9, <20%

Dimmable: 0-10V

Surge Protection Rating: 4kV (65-541, 6kV (65-542 and 65-543)

Emergency Backup Compatible: No

Efficacy: Up to 140 LPW

Photocell Included: Integrated

CRI: 80

Functional Life: 50,000 Hours

NEMA Distribution: 7V x 7H

Location Rating: Wet

IR Rating: IP66

Ambient Operating Temperature: -30C (-22F) to +45C (+113F)

Finish: Bronze

Construction: Die Cast Aluminum

Lens: Tempered Glass

Warranty: 5 Years

California Compliant: T20

ITEM SPECIFICATIONS / ORDER INFO

Item	Watts	CCT	Lumens	Beam Angle	UPC	DLC ID	Pack QTY
65-541	15W/25W/35W	3000K/4000K/5000K	1800L-4900L	150x135	045923657962	S-YAZ2QI	1
65-542	45W/60W/80W	3000K/4000K/5000K	5400L-11200L	150x140	045923657979	S-HIQURN	1
65-543	100W/125W/150W	3000K/4000K/5000K	12000L-21000L	150x140	045923657986	S-O8YIEL	1

OPTIONAL ACCESSORIES/MOUNTING

Item	Description	Finish	UPC	Pack QTY
65-544	Trunnion Mount for 65-541 and 65-542	Bronze	045923657993	1
65-545	Trunnion Mount for 65-543	Bronze	045923657856	1
65-546	Yoke Mount for 65-541	Bronze	045923658303	1
65-547	Yoke Mount for 65-542	Bronze	045923658402	1
65-548	Yoke Mount for 65-543	Bronze	045923659300	1
65-549	Slipfitter Mount for 65-541 and 65-542	Bronze	045923654688	1



Knuckle Mount with Mounting Plate (65-542 shown)







Trunnion Mount



Yoke Mount



Slipfitter Mount

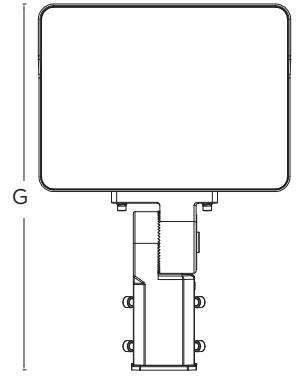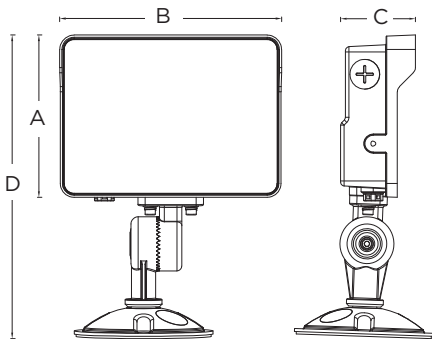

DIMENSIONS

Item	(A) Length	(B) Width	(C) Depth	(D) Length with Knuckle Mount and Plate	(E) Length with Trunnion Mount	(F) Length with Yoke Mount	(G) Length with Slipfitter Mount
65-541	7.24"	9.91"	2.44"	9.9"	9.5"	7.88"	14.5"
65-542	9.65"	11.68"	3.07"	11.7"	11.2"	10.13"	16.25"
65-543	11.61"	16.84"	3.86"	-	15.2"	12.25"	16.82"

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Replacement wattage shown depends on application and fixture. Specifications are subject to change without prior notice.