

LED EXIT AND EMERGENCY LIGHT COMBO

BATTERY BACKUP



Keep your building safe and secure with the SATCO|NUVO LED Exit and Emergency Light Combo. With single or double face options in either red or green lettering, knockout chevron directional arrows and integrated emergency lights; this combo is customizable to fit your needs. Two adjustable light heads provide ample lighting for an emergency, and the ceiling or wall mounting options make installation easy. The 5VA flame retardant ABS housing ensures durability, while a 90-minute battery backup run time guarantees reliable emergency lighting. You can trust the SATCO|NUVO LED Exit and Emergency Light Combo to keep your building up to code.



120-277V

2 YEAR WARRANTY



GREEN OR RED LETTERING

SINGLE OR DUAL FACE

KNOCKOUT CHEVRON
DIRECTIONAL ARROWS

TWO ADJUSTABLE
LIGHT HEADS

CEILING OR WALL MOUNTING,
ACCESSORIES INCLUDED

5VA FLAME RETARDANT
ABS HOUSING

90 MINUTE BATTERY BACKUP
RUN TIME

SUGGESTED APPLICATIONS

Commercial & Industrial,
Garages, Retail,
Schools, Hospitals

GENERAL SPECIFICATIONS

Input Voltage, Frequency: 120/277V, 60Hz
Emergency Backup: Yes
Emergency Duration/Run Time: 90 Minutes
Recharge Time: 24 Hours
Battery Push to Test Button: Yes
Battery Type: Ni-Cad 3.6V
Recycle Time: >500
Letter Height: 6"
Letter Stroke: 3/4"

Construction: Thermoplastic ABS
Mounting Options: Ceiling and Wall
Mounting Height: 7.5 Ft/10 Ft
Center to Center Spacing: 18 Ft/17 Ft
Path of Egress: 6 Ft
Location Rating: Damp
Ambient Operating Temperature:
 10°C (50°F) to 40°C (104°F)
Warranty: 2 Years



ITEM SPECIFICATIONS/ORDER INFO

Item	Watts	Input Current @120V/277V	Lumens	Letter Color	Face Type	Remote Capable
67-120	2.8W	.023/.010A	150	Green	Single or Dual	No
67-121	2.8W	.023/.010A	150	Red	Single or Dual	No
67-122	3.5W	.029/.013A	150	Red	Single or Dual	Yes
67-125	3.5W	.029/.013A	150	Green	Single or Dual	Yes

OPTIONAL ACCESSORIES (SOLD SEPARATELY)

Item	Style	Watts	Lumens
67-134	Square, Single	.75W	60
67-135	Square, Double	1.5W	120
67-136	Round, Single	1W	100
67-142	Round, Single	0.75W	75
67-143	Round, Double	1.5W	150



67-134



67-135










67-136 & 67-142



67-143

DIMENSIONS/WEIGHTS

Item	Width (A)	Height (B)	Depth (C)	Weight (Lbs)
67-120	19.00"	7.25"	4.00"	2.99
67-121	19.00"	7.25"	4.00"	2.99
67-122	19.00"	7.25"	4.00"	2.99
67-125	19.00"	7.25"	4.00"	2.99
67-134	6.00"	4.25"	3.50"	0.44
67-135	9.00"	4.25"	3.38"	0.66
67-136	4.50"	-	6.06"	0.44
67-142	4.50"	-	6.32"	0.44
67-143	9.20"	4.50"	5.68"	1.04

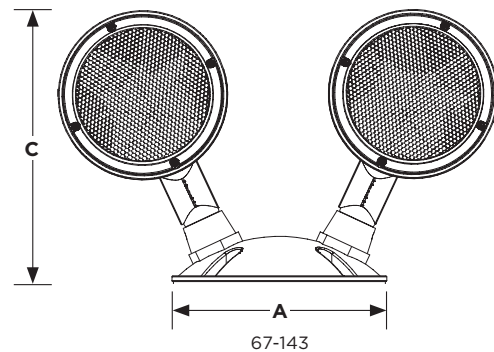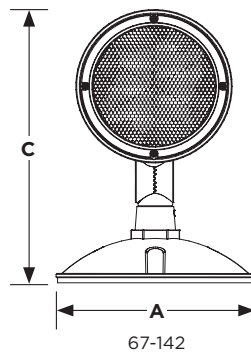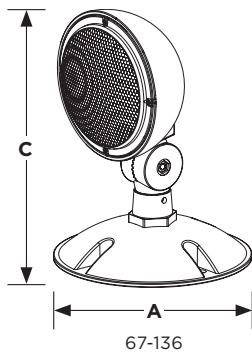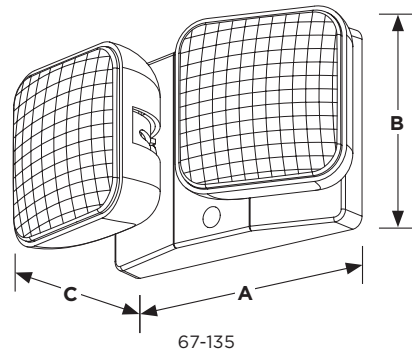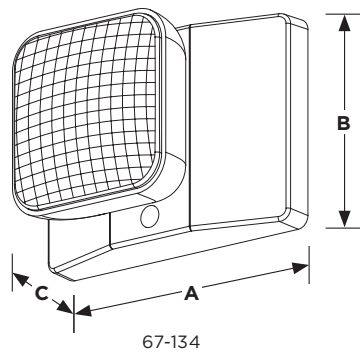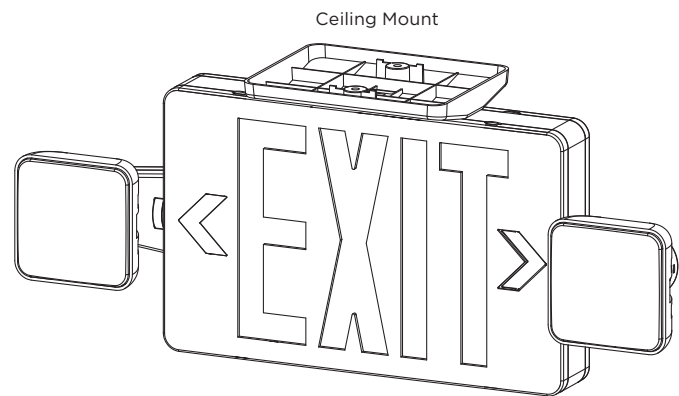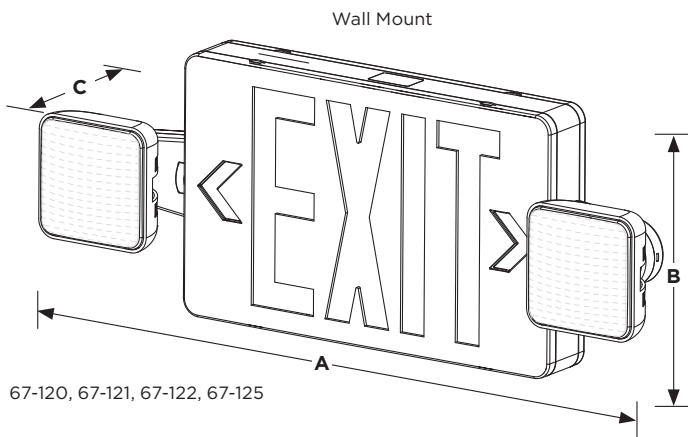

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Specifications are subject to change without prior notice.
Visit satco.com/service/warranty for complete 2 year warranty details.