

BLINK® PERFORMER

SURFACE MOUNTED LED DOWNLIGHT
LOW PROFILE DRIVER | FLAT BACK

5" | 7" | 9" MODELS



**CURVED PROFILE /
CHAMFERED BEZEL**

**DESIGNER DIE-CAST
ALUMINUM CONSTRUCTION**

5 CCT SELECTABLE


BUILT-IN SURGE PROTECTION

**QUICK INSTALL
MOUNTING BRACKET**

ENERGY STAR®

SUGGESTED APPLICATIONS:

Residential
Bathrooms
Bedrooms
Hallways

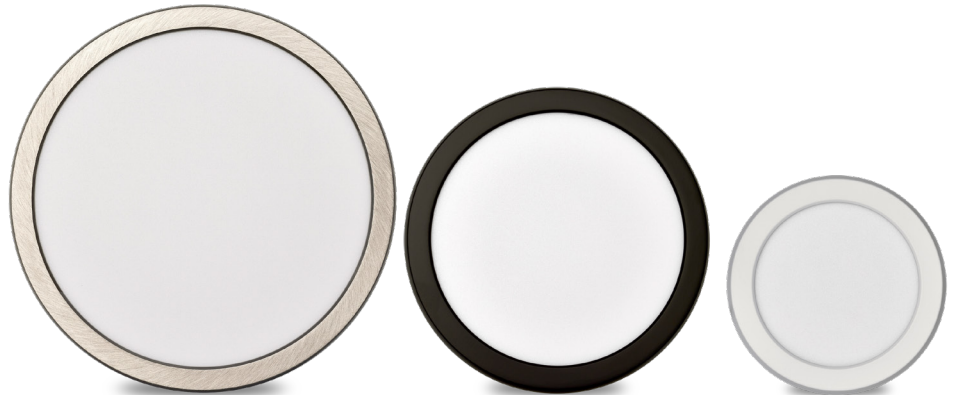

With a focus on delivering exceptional quality and performance, Blink® Performer presents a unique blend of features tailored to cater to a diverse range of applications. Boasting a gracefully curved profile and a chamfered bezel, the design reflects both elegance and functionality, seamlessly integrating into any setting. The meticulously crafted designer die-cast aluminum construction ensures both durability and aesthetic appeal, embodying the product's commitment to excellence. Innovative features like quick installation mounting brackets, and energy-efficient operation compliant with ENERGY STAR® standards, the Blink® Performer stands as a reliable and adaptable choice.



GENERAL SPECIFICATIONS - 120V MODEL

Input Voltage, Frequency: 120V, 60Hz
Power Factor, THD%: 0.9, <20%
CCT: 2700K/3000K/3500K/4000K/5000K
CRI: 90
Functional Life: 50,000 Hours
Location Rating: Wet (Indoor Only)

Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)
Suitable for Bathroom Applications: Yes
Dimmable: Yes, Triac

** Not for Use with Emergency Back-up Units*

DRIVER SPECIFICATIONS

2.5 kV Surge Protection/Fused
 EMI Filter
 Inline Filter
 Varistor for Smooth Triac dimming
 CCT Selectable

ITEM SPECIFICATIONS / ORDER INFO



Item	Size	Shape	Finish	Watts	Lumens	Efficacy (Up to LPW)	Input Current @ 120
62-1900	5"	Round	White	8W	700L-730L	91.25	0.067A
62-1901	5"	Round	Black	8W	650L-680L	85	0.067A
62-1902	5"	Round	Bronze	8W	650L-680L	85	0.067A
62-1903	5"	Round	Brushed Nickel	8W	650L-680L	85	0.067A
62-1910	7"	Round	White	10W	900L-980L	98	0.083A
62-1911	7"	Round	Black	10W	850L-930L	93	0.083A
62-1912	7"	Round	Bronze	10W	850L-930L	93	0.083A
62-1913	7"	Round	Brushed Nickel	10W	850L-930L	93	0.083A
62-1920	9"	Round	White	11W	1050L-1150L	104.55	0.092A
62-1921	9"	Round	Black	11W	1000L-1050L	95.45	0.092A
62-1922	9"	Round	Bronze	11W	1000L-1050L	95.45	0.092A
62-1923	9"	Round	Brushed Nickel	11W	1000L-1050L	95.45	0.092A
62-1904	5"	Square	White	8W	680L-730L	91.25	0.067A
62-1905	5"	Square	Black	8W	600L-650L	81.25	0.067A
62-1906	5"	Square	Bronze	8W	600L-650L	81.25	0.067A
62-1907	5"	Square	Brushed Nickel	8W	600L-650L	81.25	0.067A
62-1914	7"	Square	White	10W	900L-980L	98	0.083A
62-1915	7"	Square	Black	10W	850L-900L	90	0.083A
62-1916	7"	Square	Bronze	10W	850L-900L	90	0.083A
62-1917	7"	Square	Brushed Nickel	10W	850L-900L	90	0.083A
62-1924	9"	Square	White	11W	1050L-1100L	100	0.092A
62-1925	9"	Square	Black	11W	1000L-1050L	95.45	0.092A
62-1926	9"	Square	Bronze	11W	1000L-1050L	95.45	0.092A
62-1927	9"	Square	Brushed Nickel	11W	1000L-1050L	95.45	0.092A

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Specifications are subject to change without prior notice.

DIMENSIONS

(A) Diameter/ Length	(B) Inside Diameter/Length	(C) Trim Height	(D) Overall Height
5" Round	3.62"	0.67"	.74"
7" Round	5.62"	0.67"	.74"
9" Round	7.62"	0.67"	.74"
5" Square	3.62"	0.67"	.74"
7" Square	5.62"	0.67"	.74"
9" Square	7.62"	0.67"	.74"

Driver Fits Most 3" & 4" J Box
and Pancake Installations

