

PRODUCT INFORMATION

120V Recessed downlight retrofits

Spring clip mounting system


Applications

- Residential
- Office
- Retail
- Hospitality

Features

- Direct replacement for reflector lamps
- Dimmable*
- Long life, 35,000 hours
- Environmentally friendly – no UV or IR radiation
- 90 CRI
- 3 year warranty**
- Damp location listed - Gimbal
- U.L. wet location listed - Baffle
- ENERGY STAR® certified

S9123: 4" Gimbal

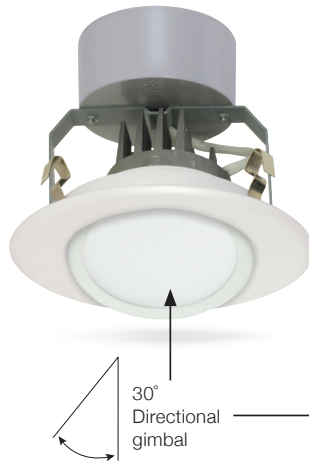

S9125: 5"-6" Gimbal



S9124: 4" Baffle



S9126: 5"-6" Baffle, 820 Lumens
S9127: 5"-6" Baffle, 1210 Lumens



E26 Adapter included



S9123 Illumination 8W 90°

Center Beam LUX	Beam W	H
2m 46.61 LUX	4.1m	4.1m
4m 11.65 LUX	8.2m	8.2m
6m 5.18 LUX	12.3m	12.4m

S9125 Illumination 11W 90°

Center Beam LUX	Beam W	H
2m 67.68 LUX	4.4m	4.4m
4m 16.92 LUX	8.8m	9.9m
6m 7.52 LUX	13.2m	13.3m

S9124 Illumination 8.5W 90°

Center Beam LUX	Beam W	H
2m 60.97 LUX	3.9m	3.9m
4m 15.24 LUX	7.8m	7.9m
6m 6.77 LUX	11.7m	11.8m

S9126 Illumination 13W 90°

Center Beam LUX	Beam W	H
2m 99.28 LUX	4.0m	4.0m
4m 24.82 LUX	8.0m	8.0m
6m 11.03 LUX	12.1m	12.0m

S9127 Illumination 20W 90°

Center Beam LUX	Beam W	H
2m 143.97 LUX	4.0m	4.0m
4m 35.99 LUX	8.0m	7.9m
6m 16.00 LUX	11.9m	11.9m



Recessed Downlight Retrofit - 120V

Item Number	Lamp Description	Watts	Volts	CRI	CCT	Lumens	Beam	M.O.L. (Inches)	Life/ Hours
S9123	8WLED/RDL/4GBL/120V	8	120	90	3000K	410	90°	4	35,000
S9124	8.5WLED/RDL/4BFL/120V	8.5	120	90	3000K	480	90°	3 3/8	35,000
S9125	11WLED/RDL/5-6GBL/120V	11	120	90	3000K	635	90°	4 1/4	35,000
S9126	13WLED/RDL/5-6BFL/120V	13	120	90	3000K	820	90°	3 3/4	35,000
S9127	20WLED/RDL/5-6BFL/120V	20	120	90	3000K	1210	90°	4	35,000

* Consult Satco or visit www.satco.com for an up to date dimmer compatibility list.

Pack: Master 12/1

** See separate warranty for complete terms and conditions.