SATCO

LED COMMERCIAL DOWNLIGHTS

PRO SERIES | REMOTE DRIVER

S11815

S11811

- **WATTAGE SELECTABLE**
- **2700K, 3000K, 3500K, 4000K, 5000K SELECTABLE**
- **REMOTE DRIVER AND J BOX WITH KNOCKOUTS**
- **120-277 RANGE VOLTAGE CIRCUIT**
- **0-10V DIMMING**
- **80CRI**
- **WET LOCATION**
- **cETLus LISTED**
- **5 YEAR WARRANTY**

SUGGESTED APPLICATIONS

Office
Retail
Hospitality
Indoor/Outdoor
Exterior Canopies

SATCO's Pro Series LED commercial downlight is the perfect solution for offices, stores, hospitals, and hotels. Dimmable and CCT selectable, this direct wired downlight installs easily even in the most challenging renovations and new constructions. Versatile and simple, this downlight delivers 50,000 hours of warm to cool white light.

LED COMMERCIAL DOWNLIGHTS
PRO SERIES | REMOTE DRIVER

GENERAL SPECIFICATIONS

Input Voltage: 120-227V
Frequency: 60Hz
Dimmable: 0-10V Dimming
CRI: 80+
CCT Selectable: 2700K/3000K/3500K/4000K/5000K
Beam Angle: 80°
Location Rating: Wet

Ambient Operating Temperature: -4F to +104F (-20C to +40C)
Material: Aluminum
Finish: White
Shape: Round
Lens Finish/Material: Clear/Polycarbonate
Functional Life: 50,000 Hours
Warranty: 5 Year

ITEM SPECIFICATIONS / ORDER INFO

Item	Product Code	Size	Lumens	Wattage	M.O.L. (In.)	Finish	UPC	Case Qty
S11810	14.5WLED/CDL/4/ADJ-CCT/80D	4"	600/800/1020	8.5/11/14.5	2.69	White	045923118104	4
S11811	23WLED/CDL/6/ADJ-CCT/80D	6"	900/1200/1750	11/16/23	3.84	White	045923118111	4
S11812	32WLED/CDL/8/ADJ-CCT/80D	8"	1600/2000/2450	19/26/32	5.05	White	045923118128	4
S11813	46WLED/CDL/10/ADJ-CCT/80D	10"	2500/3000/3500	33/40/46	5.63	White	045923118135	4
S11814	14.5WLED/CDL/4/ADJ-CCT/40D	4"	600/800/1020	8.5/11/14.5	2.69	Silver	045923118142	4
S11815	23WLED/CDL/6/ADJ-CCT/40D	6"	900/1200/1750	11/16/23	3.84	Silver	045923118159	4
S11816	32WLED/CDL/8/ADJ-CCT/40D	8"	1600/2000/2450	19/26/32	5.05	Silver	045923118166	4
S11817	46WLED/CDL/10/ADJ-CCT/40D	10"	2500/3000/3500	33/40/46	5.63	Silver	045923118173	4

DIMENSIONS

4 inch LED Commercial Downlight



6 inch LED Commercial Downlight

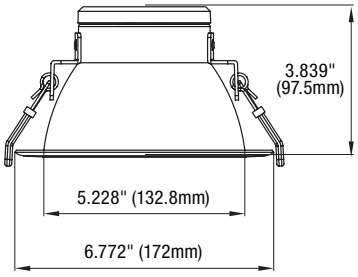

8 inch LED Commercial Downlight

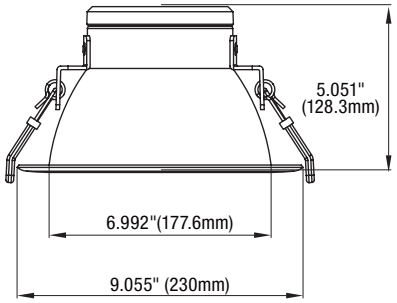

10 inch LED Commercial Downlight

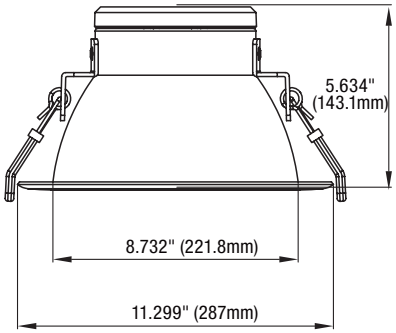

FEATURES

5 CCT Selectable Switch & Wattage Switch

Spring Loaded Arms

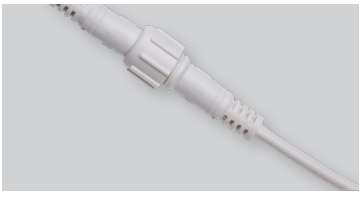

Integrated Quick-Connect Cable

Smooth Trim

© Satco Products, Inc. All rights reserved. 10/26 SA2652

OPTIONAL ACCESSORIES


Rough-in Plate

Goof Ring

Goof Ring
with Spring Clips

Item	Description	UPC	Case Qty
S13540	GOOF RING 4" - FLAT - 8" OUTSIDE DIAMETER	045923135408	24
S13541	GOOF RING 6" - FLAT - 10" OUTSIDE DIAMETER	045923135415	24
S13542	GOOF RING 8" - FLAT - 121/2" OUTSIDE DIAMETER	045923135422	24
S13543	GOOF RING 10" - FLAT - 141/2" OUTSIDE DIAMETER	045923135439	24
80-970	GOOF RING 10" - WITH SPRING CLIPS - 131/4" OUTSIDE DIAMETER	045923809705	12
80-959	ROUGH-IN PLATE/CDL 4/6/8/10	045923809590	12
S8003	6W LED/CDL EM DRIVER	045923080036	12

© Satco Products, Inc. All rights reserved. 10/26 SA2652

PHOTOMETRY

S11810
14.5WLED/CDL/4/ADJ-CCT/80D



Lumens: 1157 lm
Power: 13.5 W
Efficacy: 86 lm/W
CRI: 80+
Spacing Criteria: 1.1
Beam Angle: 77°

S11811
23WLED/CDL/6/ADJ-CCT/80D



Lumens: 1824 lm
Power: 22.4 W
Efficacy: 81 lm/W
CRI: 80+
Spacing Criteria: 1.09
Beam Angle: 77°

S11812
32WLED/CDL/8/ADJ-CCT/80D



Lumens: 2658 lm
Power: 31.2 W
Efficacy: 85 lm/W
CRI: 80+
Spacing Criteria: 1.06
Beam Angle: 74°

S11813
46WLED/CDL/10/ADJ-CCT/80D



Lumens: 3894 lm
Power: 44.5 W
Efficacy: 88 lm/W
CRI: 80+
Spacing Criteria: 1.07
Beam Angle: 77°

S11814
14.5WLED/CDL/4/ADJ-CCT/40D



Lumens: 1145 lm
Power: 13.3W
Efficacy: 86 lm/W
CRI: 80+
Spacing Criteria: 0.53
Beam Angle: 35°

S11815
23WLED/CDL/6/ADJ-CCT/40D



Lumens: 2015 lm
Power: 22.3 W
Efficacy: 90 lm/W
CRI: 80+
Spacing Criteria: 0.6
Beam Angle: 36°

S11816
32WLED/CDL/8/ADJ-CCT/40D



Lumens: 2791 lm
Power: 30.4 W
Efficacy: 92 lm/W
CRI: 80+
Spacing Criteria: 0.57
Beam Angle: 35°

S11817
46WLED/CDL/10/ADJ-CCT/40D



Lumens: 3538 lm
Power: 44.5 W
Efficacy: 80 lm/W
CRI: 80+
Spacing Criteria: 0.6
Beam Angle: 36°

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Fixture may not be compatible with all dimmers. See satco.com for details.
Specifications are subject to change without prior notice.
Replacement wattage shown depends on application and fixture.
Meets requirements of ICES-005 issue 5 class B for use in residential and commercial applications.
WARNING: This product can expose you to chemicals including Lead which is known to the State of California to cause cancer, or birth defects, or other reproductive harm. For more information, go to http://www.P65Warnings.ca.gov.
Visit satco.com/service/warranty for complete warranty details.

© Satco Products, Inc. All rights reserved. 10/26 SA2652