

**COMMERCIAL LED
DOWNLIGHTS WITH CCT
& WATTAGE SELECTABLE
TECHNOLOGY**



WATTAGE SELECTABLE

**2700K, 3000K, 3500K, 4000K, 5000K
SELECTABLE**

**REMOTE DRIVER AND J BOX WITH
KNOCKOUTS**

120-277 RANGE VOLTAGE CIRCUIT


0-10V DIMMING

80CRI

DAMP LOCATION

cETLus LISTED

5 YEAR WARRANTY

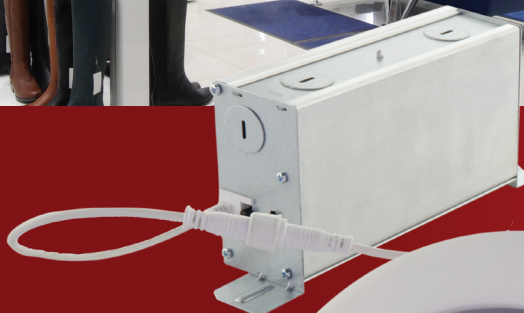

SATCO LED LAMPS

COMMERCIAL LED DOWNLIGHTS WITH COLORQUICK TECHNOLOGY, SELECTABLE WATTAGE AND LUMEN OUTPUT

For retrofit or
new construction

Office

Retail

Hospitality

Healthcare

Wattage Selectable

2700K, 3000K, 3500K, 4000K,
5000K Selectable

Remote driver and J box with
knockouts

120-277 range voltage circuit

0-10V dimming

80CRI

Damp location

cETLus listed

5 Year warranty





Outboard LED driver/
junction box makes
placement easy, even
in the most challenging
renovations, and mounts
securely into available
mounting plates for new
construction.




Spring-loaded arms ensure a tight fit in
existing ceilings or mounting plate for
new construction.




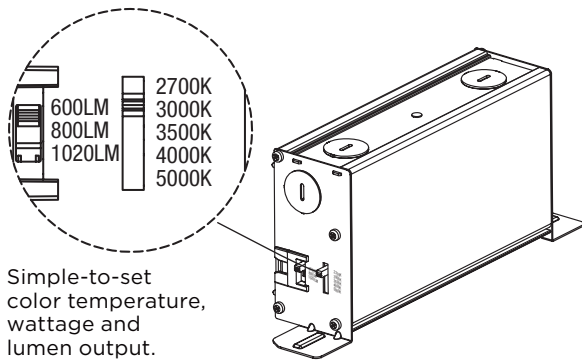


4 inch LED Commercial Downlight





6 inch LED Commercial Downlight

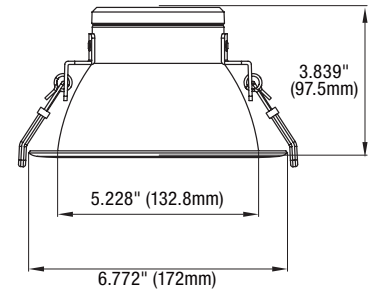

8 inch LED Commercial Downlight

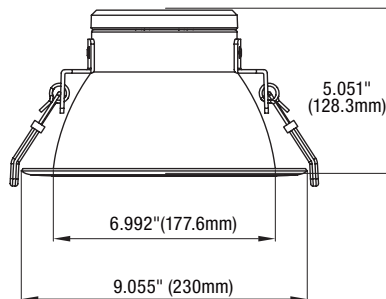

10 inch LED Commercial Downlight

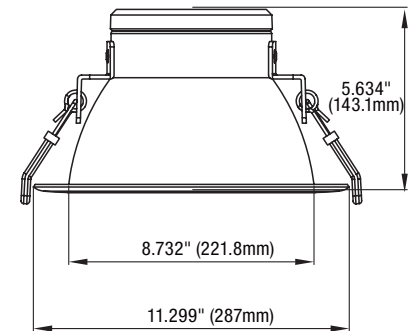

Optional rough-in plate



Goof Ring



Goof Ring with Spring Clips

New construction is easy with these available accessories.




Item	Description	Wattage Selectable	CCT Selectable	V	Lumens	CRI	M.O.L. (In.)	Finish	Life/ Hrs.	UPC	M/ Case Qty.
S11810	14.5WLED/CDL/4/ADJ-CCT/80D	8.5/11/14.5	27-30-35-40-50K	120-277	600/800/1020	80	2.69	White	50K	045923118104	4
S11811	23WLED/CDL/6/ADJ-CCT/80D	11/16/23	27-30-35-40-50K	120-277	900/1200/1750	80	3.84	White	50K	045923118111	4
S11812	32WLED/CDL/8/ADJ-CCT/80D	19/26/32	27-30-35-40-50K	120-277	1600/2000/2450	80	5.05	White	50K	045923118128	4
S11813	46WLED/CDL/10/ADJ-CCT/80D	33/40/46	27-30-35-40-50K	120-277	2500/3000/3500	80	5.63	White	50K	045923118135	4
S11814	14.5WLED/CDL/4/ADJ-CCT/40D	8.5/11/14.5	27-30-35-40-50K	120-277	600/800/1020	80	2.69	Silver	50K	045923118142	4
S11815	23WLED/CDL/6/ADJ-CCT/40D	11/16/23	27-30-35-40-50K	120-277	900/1200/1750	80	3.84	Silver	50K	045923118159	4
S11816	32WLED/CDL/8/ADJ-CCT/40D	19/26/32	27-30-35-40-50K	120-277	1600/2000/2450	80	5.05	Silver	50K	045923118166	4
S11817	46WLED/CDL/10/ADJ-CCT/40D	33/40/46	27-30-35-40-50K	120-277	2500/3000/3500	80	5.63	Silver	50K	045923118173	4
ACCESSORIES											
S13540	GOOF RING 4" - FLAT - 8" OUTSIDE DIAMETER									045923135408	24
S13541	GOOF RING 6" - FLAT - 10" OUTSIDE DIAMETER									045923135415	24
S13542	GOOF RING 8" - FLAT - 12½" OUTSIDE DIAMETER									045923135422	24
S13543	GOOF RING 10" - FLAT - 14½" OUTSIDE DIAMETER									045923135439	24
80-970	GOOF RING 10" - WITH SPRING CLIPS - 13¾" OUTSIDE DIAMETER									045923809705	12
80-959	ROUGH-IN PLATE/CDL 4/6/8/10									045923809590	12
S8003	6W LED/CDL EM DRIVER									045923080036	12

Photometry


S11810


14.5WLED/CDL/4/ADJ-CCT/80D



Lumens: 1157 lm
 Power: 13.5 W
 Efficacy: 86 lm/W
 CRI: 80+
 Spacing Criteria: 1.1
 Beam Angle: 77°


S11811


23WLED/CDL/6/ADJ-CCT/80D



Lumens: 1824 lm
 Power: 22.4 W
 Efficacy: 81 lm/W
 CRI: 80+
 Spacing Criteria: 1.09
 Beam Angle: 77°


S11812


32WLED/CDL/8/ADJ-CCT/80D




Lumens: 2658 lm
 Power: 31.2 W
 Efficacy: 85 lm/W
 CRI: 80+
 Spacing Criteria: 1.06
 Beam Angle: 74°


S11813


46WLED/CDL/10/ADJ-CCT/80D



Lumens: 3894 lm
 Power: 44.5 W
 Efficacy: 88 lm/W
 CRI: 80+
 Spacing Criteria: 1.07
 Beam Angle: 77°


S11814


14.5WLED/CDL/4/ADJ-CCT/40D



Lumens: 1145 lm
 Power: 13.3W
 Efficacy: 86 lm/W
 CRI: 80+
 Spacing Criteria: 0.53
 Beam Angle: 35°


S11815


23WLED/CDL/6/ADJ-CCT/40D



Lumens: 2015 lm
 Power: 22.3 W
 Efficacy: 90 lm/W
 CRI: 80+
 Spacing Criteria: 0.6
 Beam Angle: 36°


S11816


32WLED/CDL/8/ADJ-CCT/40D



Lumens: 2791 lm
 Power: 30.4 W
 Efficacy: 92 lm/W
 CRI: 80+
 Spacing Criteria: 0.57
 Beam Angle: 35°


S11817

46WLED/CDL/10/ADJ-CCT/40D



Lumens: 3538 lm
 Power: 44.5 W
 Efficacy: 80 lm/W
 CRI: 80+
 Spacing Criteria: 0.6
 Beam Angle: 36°

SATCO DISTRIBUTION CENTERS

NEW YORK (HQ)

110 HEARTLAND BLVD
 BRENTWOOD, NY 11717
 T. 631-243-2022
 F. 631-243-2027

TEXAS

2000 VALWOOD PKWY
 FARMERS BRANCH, TX 75234
 T. 972-247-2437
 F. 972-247-5408

FLORIDA

1694 NW 215TH ST
 MIAMI GARDENS, FL 33056
 T. 305-624-2044
 F. 305-623-0286

CALIFORNIA

31288 SAN BENITO ST
 HAYWARD, CA 94544
 T. 510-487-4822
 F. 510-487-8955

WASHINGTON

4710 116TH ST SW
 MUKILTEO, WA 98275
 T. 425-789-3300
 F. 425-789-3310

PUERTO RICO

CAMPECHE STREET, 23
 JULIO N. MATOS INDUSTRIAL PARK
 CAROLINA, PR 00984
 T. 787-757-3510
 F. 787-757-3540

Products inventoried in Canada & Mexico, contact: internationalsales@satco.com / 631-243-2022 Ext. 315