

HIGHER LUMENS
MAXIMUM SAVINGS
POWERFUL
PERFORMANCE



SILVER REFLECTOR

WET LOCATION - INDOOR/OUTDOOR

120V DIMMABLE VERSION

**120V -277V RANGE VOLTAGE /
NON DIMMABLE VERSION**

MULTIPLE CCT OPTIONS



Our latest generation of high lumen LED PAR lamps provides powerful beam control and a higher 90 CRI, resulting in a better quality of light, while maintaining maximum efficiency. This line is now expanded to include both a dimmable 120V line and a new commercial grade 120-277V universal range voltage line. This extremely popular family of lamps is excellent for use in high ceiling applications including retail spaces, houses of worship or outdoor landscape lighting.

**SATCO LED LAMPS**

Dimmable - Dedicated 120V
Version Only

High lumen

High efficiency


CMH Replacement

CEC/T20 & 24

120V and 120-277V Range voltage



ILLUMINATION PAR30

Beam Angle: 40°




ILLUMINATION PAR38

Beam Angle: 40°

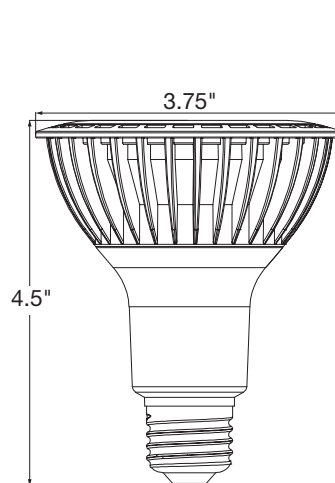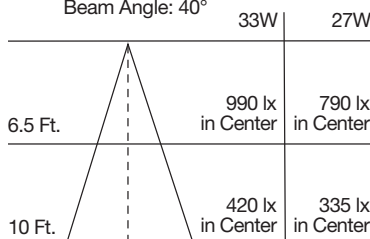

PAR 30

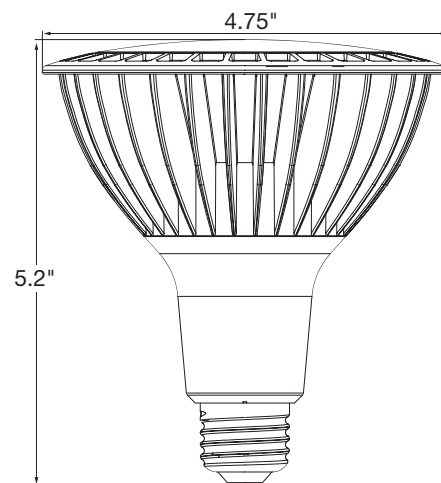

PAR 38



ITEM	DESCRIPTION	W	V	TYPE	CCT	BASE	LM	CRI	BEAM	LIFE/ HRS.	UPC	PACK
120 VOLT Dimmable												
S22240†	20.5PAR30LN/927/120V	20.5	120V	PAR30LN	2700	E26	1800	90	40°	25K	045923222405	12/6
S22241†	20.5PAR30LN/930/120V	20.5	120V	PAR30LN	3000	E26	1800	90	40°	25K	045923222412	12/6
S22242†	20.5PAR30LN/940/120V	20.5	120V	PAR30LN	4000	E26	1800	90	40°	25K	045923222429	12/6
S22243†	20.5PAR30LN/950/120V	20.5	120V	PAR30LN	5000	E26	1800	90	40°	25K	045923222436	12/6
S22250†	33PAR38/927/120V	33	120V	PAR38	2700	E26	3000	90	40°	25K	045923222504	12/6
S22251†	33PAR38/930/120V	33	120V	PAR38	3000	E26	3000	90	40°	25K	045923222511	12/6
S22252†	33PAR38/940/120V	33	120V	PAR38	4000	E26	3000	90	40°	25K	045923222528	12/6
S22253†	33PAR38/950/120V	33	120V	PAR38	5000	E26	3000	90	40°	25K	045923222535	12/6
120-277 VOLT Non-Dimmable												
S29764*	21.5PAR30LN/930/120-277V	21.5	120-277V	PAR30LN	3000	E26	1800	90	40°	25K	045923297649	12/6
S29765*	21.5PAR30LN/940/120-277V	21.5	120-277V	PAR30LN	4000	E26	1800	90	40°	25K	045923297656	12/6
S29760*	27PAR38/930/120-277V	27	120-277V	PAR38	3000	E26	2400	90	40°	25K	045923297601	12/6
S29761*	27PAR38/940/120-277V	27	120-277V	PAR38	4000	E26	2400	90	40°	25K	045923297618	12/6

Consult the Satco website for a complete, up to date list on compatible dimmers.

To prevent early lamp failure, lamp should only be installed in operating environments ranging from a minimum of -4°F (-20°C) to a maximum of 113°F (+45°C).

SATCO DISTRIBUTION CENTERS

NEW YORK (HQ)

110 HEARTLAND BLVD
BRENTWOOD, NY 11717
T. 631-243-2022
F. 631-243-2027

TEXAS

2000 VALWOOD PKWY
FARMERS BRANCH, TX 75234
T. 972-247-2437
F. 972-247-54087

FLORIDA

900 NW 159TH DR
MIAMI, FL 33169
T. 305-624-2044
F. 305-247-5408

CALIFORNIA

31288 SAN BENITO ST
HAYWARD, CA 94544
T. 510-487-4822
F. 510-487-8955

WASHINGTON

4710 116TH ST SW
MUKILTEO, WA 98275
T. 425-789-3300
F. 425-789-3310

PUERTO RICO

CAMPECHE STREET, 23 JULIO
N. MATOS INDUSTRIAL PARK 00984
T. 787-757-3510
F. 787-757-3540