

ADAPTABLE, SELECTABLE & SENSIBLE CCT SELECTABLE HI-PRO LED LAMPS WITH SENSOR PORT



ColorQuick™

Selectable Color Technology

Switch to/from the following CCT

3000K 4000K 5000K



**BUILT IN SENSOR PORT FOR
ADDITIONAL CONTROL OPTIONS**

**DEDICATED WATTAGE TO
ENSURE PROPER SIZE LAMP FOR
THE FIXTURE**

CCT SELECTABLE

**ADVANCED THERMAL
MANAGEMENT**

ENCLOSED RATED

50,000 HOURS

Our newest addition to the Hi-Pro LED family provides up to 75% in energy savings, advanced sensor port technology and are CCT selectable. The omni-directional light is designed to fully and safely illuminate higher ceiling installations such as warehouses, gymnasiums, manufacturing plants and parking garages and the built-in sensor port allows for a variety of plug and play control options.

Optional Hi-Pro Sensor Port Accessories:



80-954
WiFi Module



80-955
Motion Sensor/PIR



80-956
Photocell



80-957
Motion Sensor/MW



SATCO LED LAMPS

CCT SELECTABLE HI PRO SENSOR PORT LAMPS




Color temperature
selection switch

4000K
3000K —|— 5000K
Color Temperature

Switch to/from the following CCT



4000K



Sensor Port
For Accessories

- 3 Selectable CCT settings
- Sensor port for sensor accessories
- Superior light efficacy
- Advanced thermal management
- 4KV built in surge protection
- Enclosed Fixture, Damp location
- DLC certified




3000K




5000K




Item	Description	W	V	Base Type	CCT Selectable	Lm	CRI	Life/Hrs.	M.O.L. (In.)	UPC	Pack
S13140	45W/LED/HID/CCT/E26	45	100-277	E26	3000/4000/5000	5850~6300	80	50K	9 ¹ / ₈	045923131400	12
S13141	45W/LED/HID/CCT/EX39	45	100-277	EX39	3000/4000/5000	5850~6300	80	50K	9 ¹ / ₈	045923131417	12
S13142	54W/LED/HID/CCT/EX39	54	100-277	EX39	3000/4000/5000	7270~7560	80	50K	9 ¹ / ₈	045923131424	12
S13143	80W/LED/HID/CCT/EX39	80	100-277	EX39	3000/4000/5000	10400~11200	80	50K	9 ¹ / ₈	045923131431	4
S13144	100W/LED/HID/CCT/EX39	100	100-277	EX39	3000/4000/5000	13000~14000	80	50K	10 ¹ / ₄	045923131448	4
S13145	120W/LED/HID/CCT/EX39	120	100-277	EX39	3000/4000/5000	15600~16800	80	50K	11 ¹ / ₈	045923131455	4

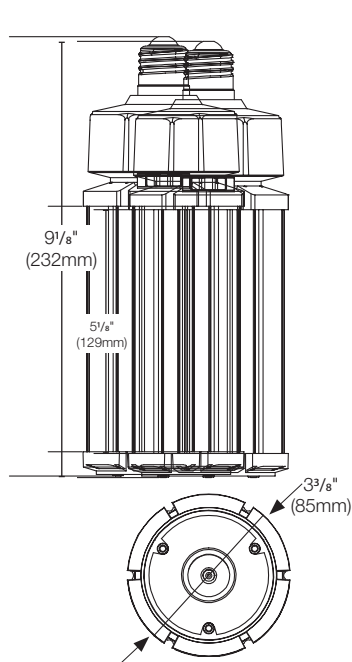


**S13140
E26 45W**

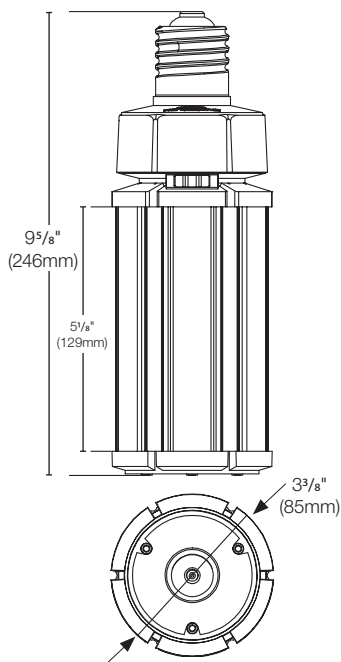


**S13141
EX39 45W**

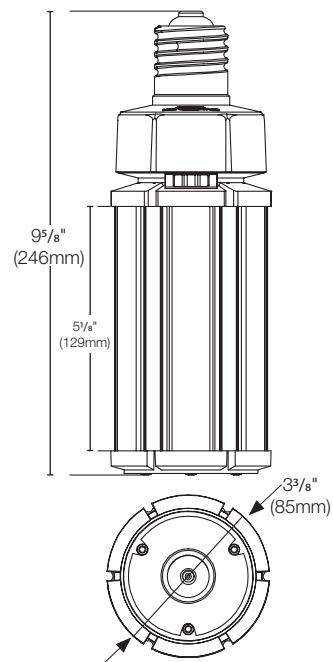


**S13142
EX39 54W**

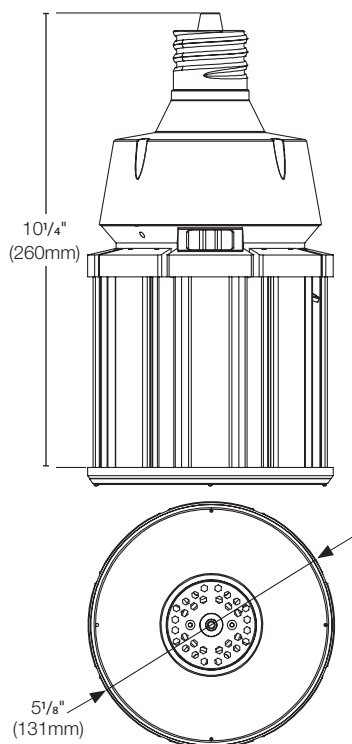

**S13143
EX39 80W**

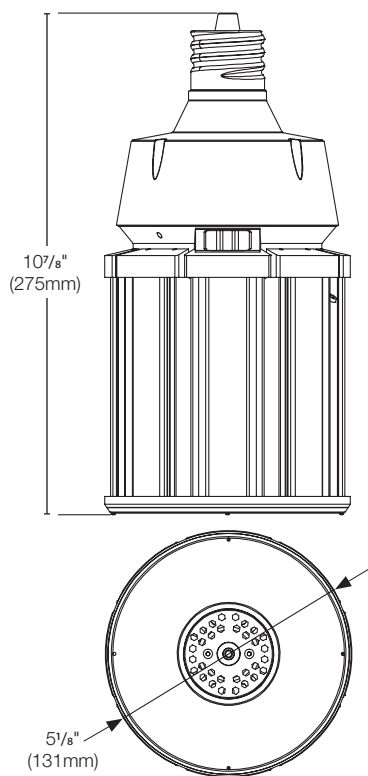

**S13144
EX39 100W**

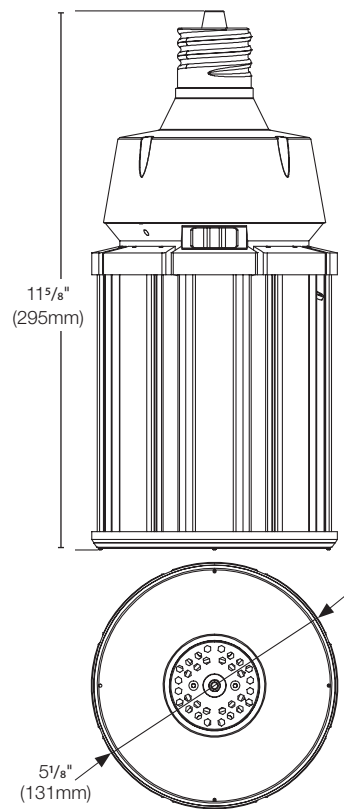

**S13145
EX39 120W**

Hi-Pro Sensors

HI-PRO WIFI MODULE 80-954

Controllable via the mobile APP
"Satco Starfish"

Dimming and time control

Support single or group lamp control

Available voice control:

Amazon Echo, Google Home, etc.

WiFi: 2.4GHz

OS: Android 4.2 or newer, IOS 8.0 or newer

Specifications

Operating voltage: 15V DC + 2V

Current: 20mA

IP rating: IP20

WiFi: 2.4GHz

OS: Android 4.2 or newer, IOS 8.0 or newer

Operating Temperature: -20°C (+4°F) to +60°C (+140°F)

Warranty: 5 years



HI-PRO MOTION SENSOR/PIR 80-955

Motion detection area: 6m (19.7')

Standby bi-level dimming: Off, 20% dim,
40% dim or 60% dim

Hold time: up to 10 minutes

Standard 3.5mm Aux port connection

Not for use in enclosed fixtures

Specifications

Operating voltage: 15V DC + 2V

Output voltage: 0-10V

Current: 20mA

IP rating: IP20

Operating Temperature: -20°C (+4°F) to +35°C (+95°F)

Warranty: 5 years



HI-PRO PHOTOCELL 80-956

Natural light detection

Reaction lux options: 20 lx, 50 lx, 100 lx, 300 lx

Adjustable hold time

Standard 3.5mm Aux port connection

Specifications

Operating voltage: 15V DC + 2V

Output voltage: 0-10V

Current: 20mA

IP rating: IP20

Operating Temperature: -20°C (4°F) to +60°C (+140°F)

Warranty: 5 years



HI-PRO MOTION SENSOR/MW 80-957

Motion detection area: 10m (33')

Standby bi-level dimming: Off, 20% dim,
40% dim or 60% dim

Hold time: up to 10 minutes

Suitable for use in enclosed fixtures (non-metallic)

Specifications

Operating voltage: 15V DC + 2V

Output voltage: 0-10V

Current: 20mA

IP rating: IP20

Operating Temperature: -20°C (+4°F) to +60°C (+140°F)

Warranty: 5 years



Item	Description	UPC	Pack
Optional Hi-Pro Intelligent Interface Accessories			
80-954	Hi-Pro WiFi Module	045923809545	100
80-955	Hi-Pro Motion Sensor / PIR	045923809552	100
80-956	Hi-Pro Photocell	045923809569	100
80-957	Hi-Pro Motion Sensor / MW	045923809576	100

SATCO DISTRIBUTION CENTERS

NEW YORK (HQ)

110 HEARTLAND BLVD
BRENTWOOD, NY 11717
T. 631-243-2022
F. 631-243-2027

TEXAS

2000 VALWOOD PKWY
FARMERS BRANCH, TX 75234
T. 972-247-2437
F. 972-247-54087

FLORIDA

900 NW 159TH DR
MIAMI, FL 33169
T. 305-624-2044
F. 305-247-5408

CALIFORNIA

31288 SAN BENITO ST
HAYWARD, CA
T. 510-487-4822
F. 510-487-8955

WASHINGTON

4710 116TH ST SW
MUKILTEO, WA 98275
T. 425-789-3300
F. 425-789-3310

PUERTO RICO

CAMPECHE STREET, 23 JULIO
N. MATOS INDUSTRIAL PARK
T. 787-757-3510
F. 787-757-3540

PRODUCTS INVENTORIED IN CANADA & MEXICO: INTERNATIONALSALES@SATCO.COM/631-243-2022 EXT. 315