



**PROVIDES UP TO 90 MINUTES
OF ILLUMINATION DURING
POWER OUTAGES**

**BATTERY ON/OFF SWITCH
CONSERVES BATTERY
AFTER INSTALLATION***

**INTEGRATED ALUMINUM
HEATSINK TO PROMOTE
HEAT DISSIPATION**


**FEATURES COLORQUICK
TECHNOLOGY, ALLOWING
FOR EASY SELECTION OF
CCT AT INSTALLATION**

5 YEAR WARRANTY

SUGGESTED APPLICATIONS


Commercial and Industrial,
Hospitals, Offices, Workshops

LED T8 LAMPS WITH BATTERY BACKUP

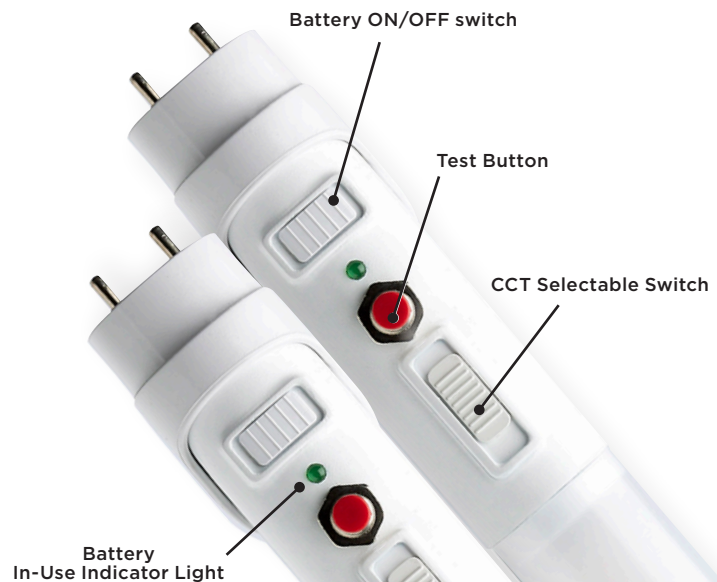

ColorQuick™

Selectable Color Technology



SATCO|NUVO's T8 Lamps with Battery Backup are the logical choice for commercial installations. Providing up to 90-minutes of illumination in the event of a power failure, these lamps are ideal for use where backup lighting is essential. Available in 15W and 17W options, both are designed to replace our most popular T8 and T12 fluorescent lamps, with the 17W model offering the option of higher lumen output. Increase safety and energy efficiency while reducing maintenance costs with this easy-to-install fluorescent alternative.



GENERAL SPECIFICATIONS

Input Voltage, Frequency: 120-277V, 60Hz

Power Factor, THD%: 0.9, <25%

Dimmable: Phase Cut Dimmable

Type B Ballast Bypass

Efficacy: up to 135 LPW

CRI: 83

Beam Spread: 140°

Functional Life (L70): >60,000 Hours

Location Rating: Damp

Rated for use in enclosed fixtures

Ambient Operating Temperature: -20°C (-4°F) to +45° (+113°F)

Base: G13 Medium Bi Pin

Battery Life: 90 minutes

Battery Type: Lithium

Battery Recharge Time: 24 hrs

Lamp Weight: 0.99 Lbs.


ITEM SPECIFICATIONS / ORDER INFO



Item	UPC	Lumens	Wattage	Battery Wattage	Battery Lumens	Input Current @ 120V/277V	CCT	DLC ID
S11730	045923117305	1,850/2,000/1,900	15W	3.5W	500	0.125/0.054A	3500K/4000K/5000K	S-U53N8J
S11731	045923117312	2,100/2,300/2,200	17W	5W	700	0.142/0.061A	3500K/4000K/5000K	S-MASCZT

ENERGY SAVINGS

Item	LED Wattage	Fluorescent Wattage
S11730	15W	32W
S11731	17W	32W

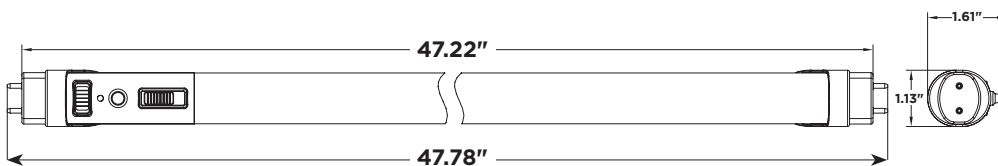

DLC Primary Use: Internal Driver/Line Voltage (UL Type B) Lamps

Specifications are subject to change without prior notice.

Replacement wattage shown depends on application and fixture.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65.

Please refer to your product packaging for more information.

*Turn on during installation