



**FIELD SELECTABLE:
3 WATTAGE AND 5 CCT**

**DLC LISTED WHEN USED IN
FA8 APPLICATIONS**

**OPTIONAL R17D BASE CAPS
INCLUDED**

**INCLUDES C-CLIP FOR EXTRA
LAMP SUPPORT**

PET COATED GLASS TUBE

**COMPATIBLE WITH OPTIONAL
10W EMERGENCY DRIVER**

SUGGESTED APPLICATIONS

Warehouses, Box Stores
Grocery Stores, Gymnasiums

LED 2-PIECE 8' T8 LAMP

FIELD SELECTABLE | BALLAST BYPASS

Ships in a 4' Carton



SATCO|NUVO is always looking for the best ways to save time and costs on the job-site. The unique 2-piece design of this T8 lamp allows for reduced shipping costs and easier installation than a single 8' long tube by using two 4' sections that securely interlock in the center for continuous illumination. Secure the connection point with the threaded collar, and C-clip to support the extended length from the center.

This ballast bypass lamp is also field selectable, offering three wattage options and five CCT options in one convenient unit. In addition, the lamp is built for use in Fa8 lamp holders, and comes with R17d adapter caps, making it versatile for use in a variety of shunted and non-shunted lamp holders.



GENERAL SPECIFICATIONS

Range Voltage, Frequency: 120V-277V, 50/60Hz

Power Factor, THD%: 0.9, 20%

CRI: 82

Efficacy: Up to 145 LPW

Functional Life: 50,000 Hours

Beam Angle: 210°

Ambient Operating Temperature: -20°C (-4°F) to +45°C (+113°F)

Enclosed Fixture Rating: Suitable for open and enclosed fixtures

Minimum Compartment Size: 97" x 11" x 3"

Construction: PET Coated Glass

Wiring: Double-Ended

ITEM SPECIFICATIONS / ORDER INFO




Item	Watts	CCT	Lumens	DLC ID	Pack QTY
S11756	24W/32W/40W	3000K/3500K/4000K/5000K/6500K	3,500/4,400/5,500	S-HPN8SY	10*

*Only sold in complete packs of 10.

DIMENSIONS / WEIGHTS

Item	Length (A)	Width (B)	Width (C)	Height (D)	Width (E)	Height (F)	Weight
S11756	93.75"	47.25"	47.25"	1.00"	2.00"	1.25"	0.98 Lbs.

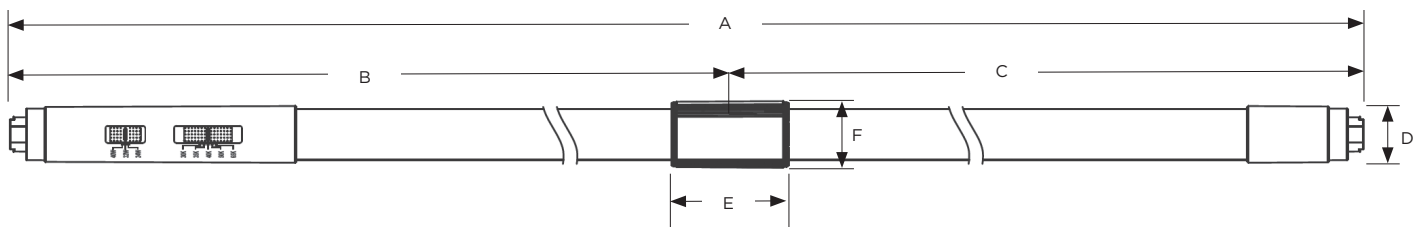

ACCESSORIES (SOLD SEPARATELY)

Item	Description
S8002	10W Emergency Driver



FEATURES



Field Selectable:
3 Wattages and 5 CCT



8-Point Contact - Each section has 4 pins and female pin connectors for assured connection



Threaded coupler securely connects both sections of the lamp for continuous illumination



C-Clip attaches to fixture with self-tapping screw for additional lamp support



Easily swap Fa8 caps for R17d for applications that require double contact bases

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Lamp sections cannot be used independently. Lamp must be fully assembled to operate.
DLC Primary Use: Internal Driver/Line Voltage (UL Type B) Lamps. DLC Listed only when used in Fa8 applications.
Replacement wattage shown depends on application and fixture.
Specifications are subject to change without prior notice.