



**LOW OPTICAL FLICKER
ILLUMINATION-LESS THAN 2%**

**PET COATED FOR SAFETY IN
FOOD SERVICE APPLICATIONS**

5 CCT SELECTABLE

120V-277V RANGE VOLTAGE

**DIMMABLE WHEN USED IN
120V APPLICATIONS**


SUGGESTED APPLICATIONS
Commercial Kitchens
Offices
Retail

PREMIUM LED T8 LAMPS

BALLAST BYPASS | CCT SELECTABLE



ColorQuick
Selectable Color Technology



**2', 3', and 4',
Models Available**

SATCO|NUVO's LED Low Optical Flicker Lamps offer smooth, continuous light with less than 2% flicker. Ideal for use in offices, retail applications, and safe for use in commercial kitchens with the PET coated shatterproof tube. Extending the versatility of these lamps, they are 120V-277V range voltage compatible in ballast bypass configurations, and allow for five CCT selection at the time of installation to customize the light output to the environment.



GENERAL SPECIFICATIONS

Range Voltage, Frequency: 120V-277V, 50/60Hz
Power Factor: 0.9
THD%: >20%
Dimming: Dimmable Down to 10% When Used in 120V Applications
Type B: Ballast Bypass
CRI: 83
Functional Life: 50,000 Hours
CCT Selectable: 3000K/3500K/4000K/5000K/6500K

Beam Angle: 160°
Location Rating: Damp
Ambient Operating Temperature: -20°C (-4°F) to +45°C (+113°F)
Enclosed Fixture Rating: Yes
Shape: T8
Construction: PET Coated Shatterproof Frosted Glass
Base: G13 Medium Bi-Pin
Warranty: 5 Years




ITEM SPECIFICATIONS / ORDER INFO

Item	Nominal Length	Watts	Flourescent Replacement Wattage	Lumens	Input Current @120V/277V	Efficacy	Pack QTY
S11660	2'	7W	17W	900/950/1000/1000/950	0.08/0.03A	128/135/142 LPW	25
S11661	3'	12W	25W	1450/1500/1550/1550/1500	0.13A/0.60	120/125/129 LPW	25
S11662	4'	9.5W	32W	1600/1625/1650/1650/1625	0.11/0.04A	168/171/173 LPW	25
S11663	4'	10.5W	32W	1600/1650/1700/1700/1650	0.12/0.05A	152/157/156 LPW	25
S11664	4'	11.5W	32W	1700/1750/1800/1800/1750	0.13/0.05A	147/152/156 LPW	25
S11665	4'	15W	32W	2000/2100/2200/2200/2100	0.16/0.07A	133/140/146 LPW	25
S11666	4'	18.5W	32W	2400/2500/2600/2600/2500	0.18/0.08A	129/135/140 LPW	25

DIMENSIONS/WEIGHTS

Item	MOL (A)	MOD (B)	Weight
S11660	23.28"	1.14"	0.02 Lbs.
S11661	35.24"	1.14"	0.34 Lbs.
S11662	47.10"	1.14"	0.47 Lbs.
S11663	47.10"	1.14"	0.47 Lbs.
S11664	47.10"	1.14"	0.47 Lbs.
S11665	47.10"	1.14"	0.47 Lbs.
S11666	47.10"	1.14"	0.47 Lbs.

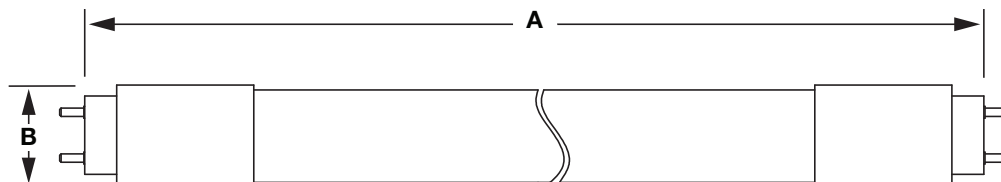

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Lamps may not be compatible with all dimmers.

Not for use in fully enclosed vapor tight fixtures

Replacement wattage shown depends on application and fixture.

Specifications are subject to change without prior notice.

Visit satco.com/service/warranty for complete warranty details.