



**CONVENIENT HANGING
HOOKS ON EACH LAMP**

DURABLE 18/2 SJTW CORD

LOW PROFILE LAMPS

IMPACT RESISTANT LENS


**LINK ADDITIONAL SETS
FOR UP TO 300 FT. OF
ILLUMINATION**

SUGGESTED APPLICATIONS

Work Area Lighting
Construction Site Lighting
Industrial Lighting
Temporary Lighting

LED HI-PRO TEMPORARY STRING LIGHTS

50' | 100'

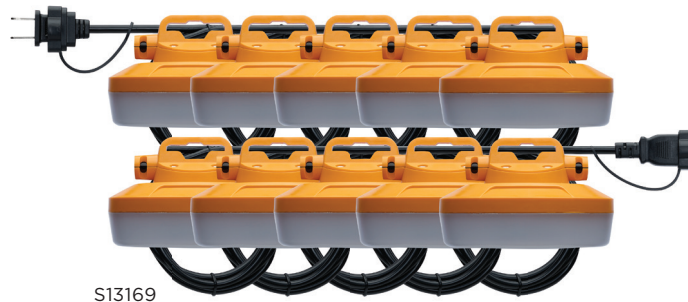

The latest low-profile and lightweight solution for temporary lighting needs - LED Hi-Pro Temporary String Lights. Powered by an 18/2 SJTW cord, and featuring impact resistant low-profile lamps, these lights are durable enough to withstand even the harshest work environments. Whether it's construction, industrial, or temporary lighting needs, these string lights deliver exceptional performance every time. Available in 50' lengths with 5 lamps and 100' lengths with 10 lamps these sets offer versatility to suit various applications. Plus, with the ability to link multiple sets you can effortlessly customize the lighting coverage to fit your needs.



GENERAL SPECIFICATIONS

Input Voltage: 120V

Frequency: 60Hz

Power Factor: 0.9

Dimming: Non-Dimmable

Surge Protection Rating: 2kV

CCT: 5000K

Beam Angle: 360°

Efficacy: 116 LPW

CRI: 80

Location Rating: Wet

IP Rating: IP65

Ambient Operating Temperature: -30°C (-22°F) to +45°C (+113°F)

Mounting Options: Hook (carabiners Included)

Power Cord: 18AWG

Lamp Construction: Polycarbonate

Functional Life: 18,000 Hours

Warranty: 2 Years




ITEM SPECIFICATIONS / ORDER INFO

Catalog Number	Length	Number of Lamps	Lumens	Wattage	Incandescent Replacement Wattage	Input Current	Max Linkable Sets
S13168	50'	5	7000	60W	500W	0.50A	6
S13169	100'	10	14000	120W	1000W	1.00A	3

DIMENSIONS / WEIGHTS

Item	Total Length	Lamp Diameter (A)	Lamp Height (B)	Weight
S13168	600"	3.94"	1.60"	5.18 Lbs.
S13169	1200"	3.94"	1.60"	8.80 Lbs.

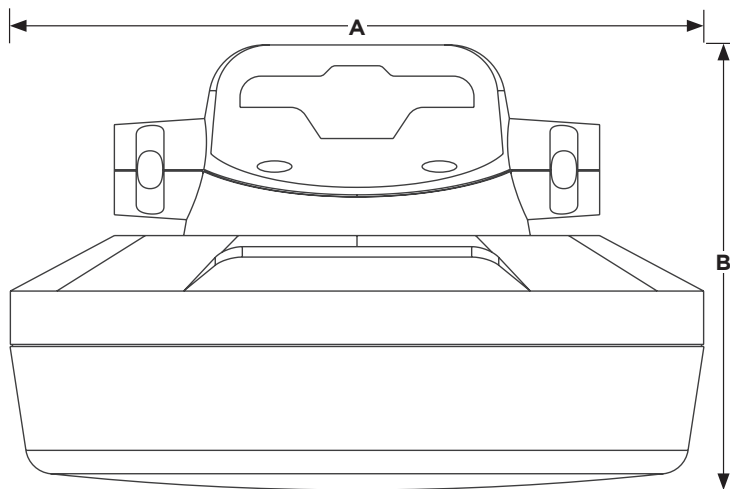

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Replacement wattage shown depends on application and fixture. Specifications are subject to change without prior notice.

Warning: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <http://www.P65Warnings.ca.gov>.