SATCO | NUVO

LED T8 LAMPS

TYPE A | CCT SELECTABLE

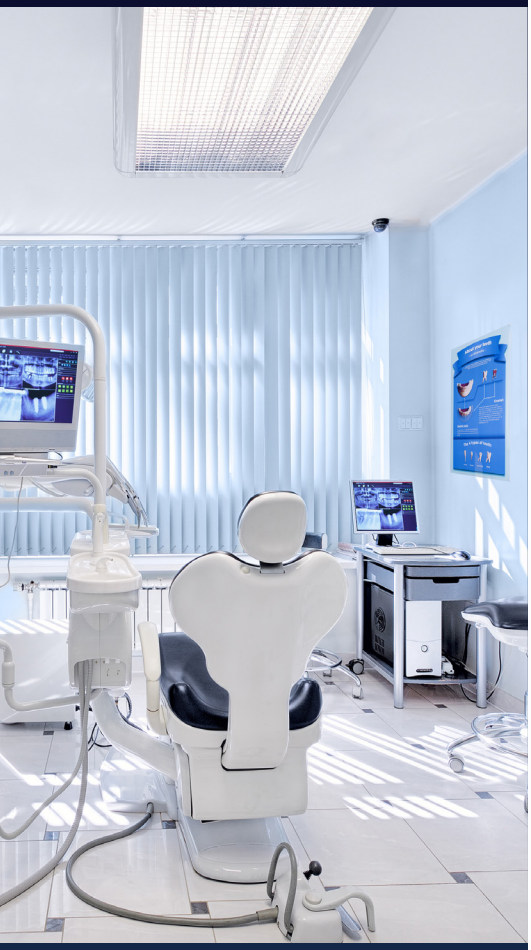

PLUG & PLAY T8 REPLACEMENTS

5 CCT SELECTABLE

OFFERED IN 2′, 3′ AND 4′ LENGTHS

SUGGESTED APPLICATIONS

Offices
Medical Facilities
Retail
Warehouses

ColorQuick®
Selectable Color Technology

Warm — Cool

3000K 3500K 4000K 5000K 6500K

2′, 3′, and 4′, Models Available

SATCO|NUVO's LED T8 Lamps - Type A are range voltage compatible and CCT selectable for versatile for use in a variety of applications. With five selectable CCTs at installation, and dimmable with compatible ballats down to 20%, these lamps allow for a customized lighting experience. High-performing, these lamps are damp location rated for reliable use in humid areas. Available in 2′, 3′, and 4′ lengths, for a uniform look throughout the any space.

TYPE A · DIMMABLE · DAMP LOCATION · ENCLOSED FIXTURE · DLC LISTED · 50,000 HOURS · 5 YEAR WARRANTY · TRUSTED NLB WARRANTY

SATCO | NUVO

LED T8 LAMPS
TYPE A | CCT SELECTABLE

GENERAL SPECIFICATIONS

Range Voltage, Frequency: Ballast Dependent
Power Factor: >0.9
THD % : <20%
Dimming: Dimmable with Select Emergency and Dimming Ballasts
Ballast Compatible: Type A
Lamp Efficacy: up to 185 LPW
CRI: 83
Beam Angle: 220°
Location Rating: Damp

Ambient Operating Temperature: -20°C (-4°F) to +45°C (+113°F)
Rated for Enclosed Fixtures: Yes
Wiring: Double Ended
Base: G13; Medium Bi Pin
Construction: Glass
Finish: Frosted
Functional Life: 50,000 Hours
Warranty: 5 Years

ITEM SPECIFICATIONS / ORDER INFO

Item	Size	Lumens	Wattage	Fluorescent Replacement Wattage	CCT	DLC ID
S21915	2′	1300/1325/1375/1375/1350	8W	17W	3000K/3500K/4000K/5000K/6500K	S-LJLMQD
S21916	3′	1650/1700/1750/1750/1700	11W	25W	3000K/3500K/4000K/5000K/6500K	S-D6LTLD
S21917	4′	1700/1750/1850/1850/1800	10W	32W/30W/28W/25W	3000K/3500K/4000K/5000K/6500K	S-6222FT
S21918	4′	2100/2150/2250/2250/2200	13W	32W/30W/28W/25W	3000K/3500K/4000K/5000K/6500K	S-54T8SL
S21919	4′	2450/2500/2650/2650/2600	17W	32W/30W/28W/25W	3000K/3500K/4000K/5000K/6500K	S-G5Y99P

DIMENSIONS/WEIGHTS

Item	MOL (A)	MOD (B)	Weight
S21915	23.78″	1.00″	0.24 Lbs.
S21916	35.78″	1.00″	0.34 Lbs.
S21917	47.78″	1.00″	0.47 Lbs.
S21918	47.78″	1.00″	0.47 Lbs.
S21919	47.78″	1.00″	0.47 Lbs.

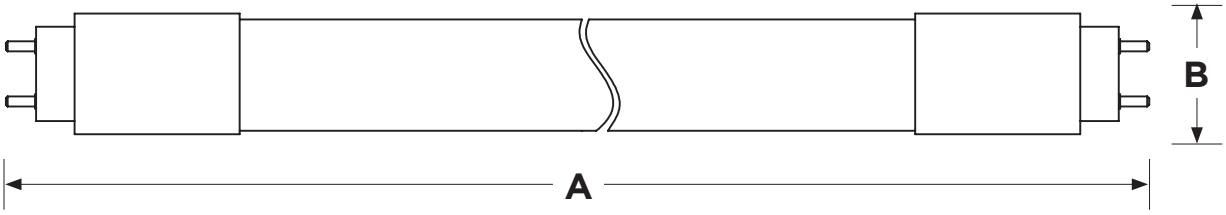

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
May not be compatible with all dimming ballasts. Visit satco.com for details.
Specifications are subject to change without prior notice.
Replacement wattage shown depends on application and fixture
DLC Primary Use: Dual Mode Internal Driver (UL Type A and Type B)
Visit satco.com/service/warranty for complete warranty details.

© Satco Products, Inc. All rights reserved. 9/24 SN1712