SATCO | NUVO

LED WRAP FIXTURES

STANDARD | PULL CHAIN | SENSOR

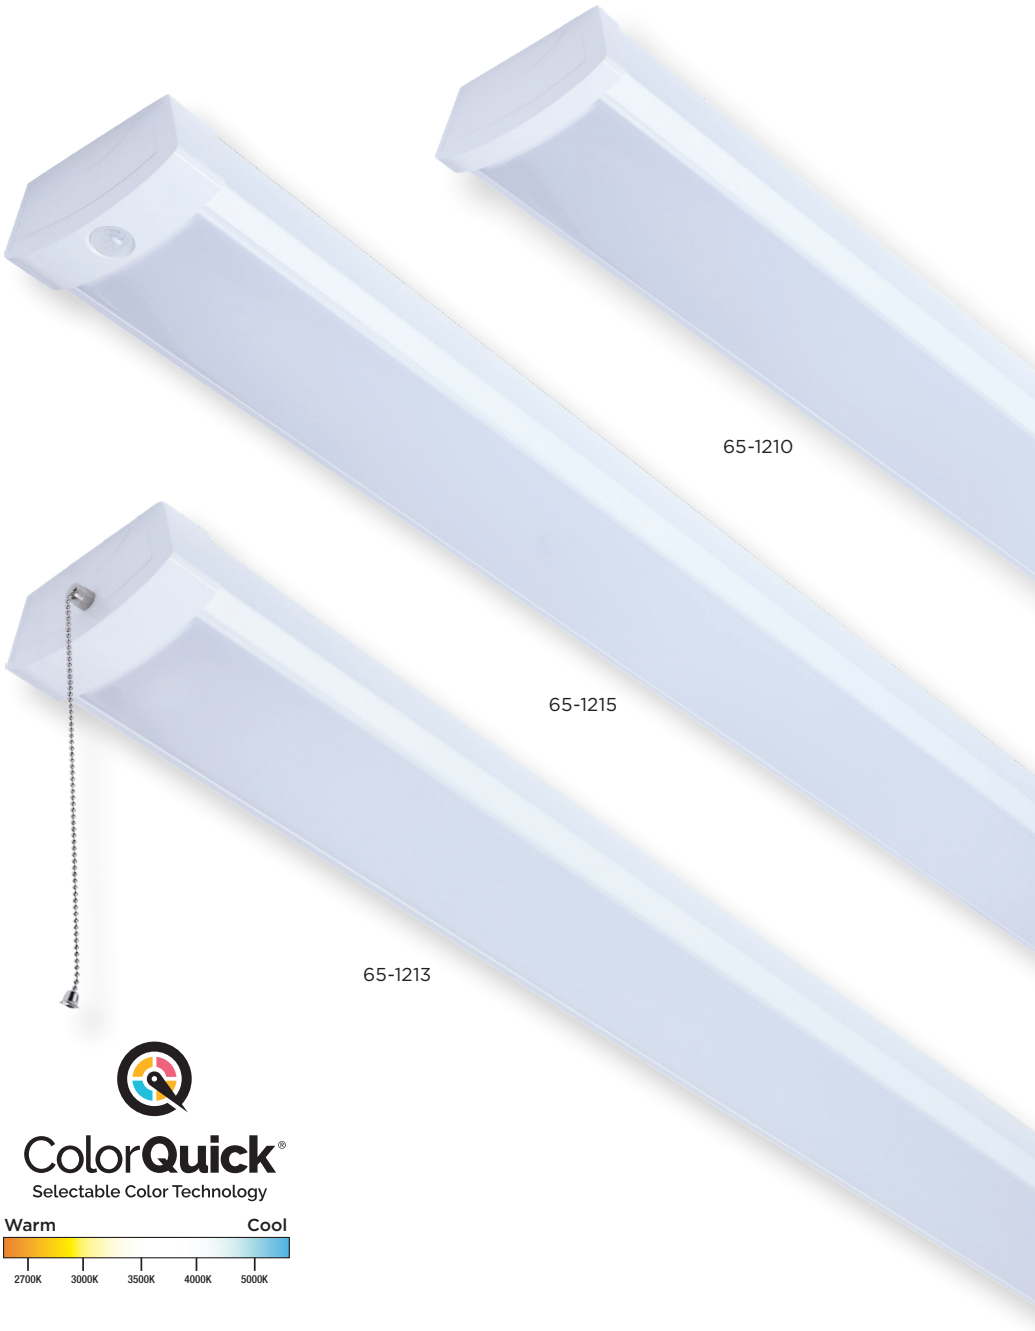

ColorQuick®
Selectable Color Technology

Warm — Cool

2700K 3000K 3500K 4000K 5000K

5 CCT SELECTABLE

90 CRI HIGH QUALITY ILLUMINATION

RATED FOR USE IN CLOSETS

STANDARD, PULL CHAIN AND SENSOR STYLES

SUGGESTED APPLICATIONS
Kitchens, Workspaces, Garages, Laundry Rooms, Utility Rooms, Closets

SATCO|NUVO's LED Wrap fixtures offer superior lighting performance with a 90 CRI for enhanced color accuracy. Equipped with 5 CCT selectable technology, they provide customizable color temperatures and optimal illumination without glare, thanks to their closed-structure lens design. All models are NEC rated for closet use, adding to their versatility. The collection includes a standard version, a pull chain model for easy control, and a model with an integrated PIR sensor for energy-efficient motion detection. Ideal for areas requiring consistent lighting, such as closets, storage rooms, hallways, and utility spaces, these fixtures deliver reliable, energy-saving illumination in residential, hospitality and light commercial settings.

CLOSET RATED | 90 CRI | DAMP LOCATION | 2.5kV SURGE PROTECTION | 50,000 HOURS | 5 YEAR WARRANTY | TRUSTED NLB WARRANTY

SATCO | NUVO

LED WRAP FIXTURES
STANDARD | PULL CHAIN | SENSOR

GENERAL SPECIFICATIONS

Power Factor: 0.9
Dimming: Non-Dimmable
Surge Protection Rating: 2.5kV
CCT Selectable: 2700K/3000K/3500K/4000K/5000K
CRI: 90
Efficacy: Up to 87 LPW
Location Rating: Damp
Closet Rating: Complies with NEC 410.16 (A)(3) & NEC 410.16 (C)(5)

Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)
Mounting Options: Surface Mount – Ceiling or Wall
Housing Construction: Steel
Lens Material: Polycarbonate
Lens Finish: White
Functional Life: 50,000 Hours
Warranty: 5 Years

ITEM SPECIFICATIONS/ORDERING INFO

Item	Size	Feature Type	Max. Lumens	Wattage	Input Voltage	Frequency	Input Current
65-1210	2FT	Standard	1650	20W	120V-277V	50/60Hz	0.17A
65-1211	4FT	Standard	3400	39W	120V-277V	50/60Hz	0.33A
65-1212	2FT	Pull Chain	1650	20W	120V	60Hz	0.17A
65-1213	4FT	Pull Chain	3400	39W	120V	60Hz	0.33A
65-1214	2FT	Integrated PIR Sensor	1650	20W	120V-277V	50/60Hz	0.17A
65-1215	4FT	Integrated PIR Sensor	3400	39W	120V-277V	50/60Hz	0.33A

DIMENSIONS / WEIGHTS

Item	Length (A)	Width (B)	Height (C)	Weight
65-1210	24.33"	5.50"	2.56"	2.16 Lbs.
65-1211	47.24"	5.50"	2.56"	3.84 Lbs.
65-1212	24.77"	5.50"	2.56"	2.34 Lbs.
65-1213	47.68"	5.50"	2.56"	4.01 Lbs.
65-1214	24.33"	5.50"	2.79"	2.27 Lbs.
65-1215	47.24"	5.50"	2.79"	3.95 Lbs.



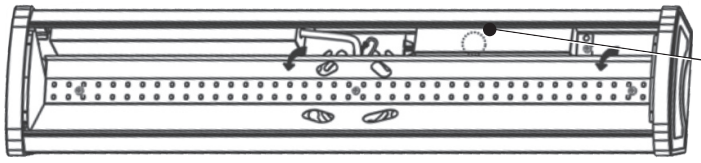

Mounts directly to junction box or can be internally wired using built-in junction box



CCT Selectable Switch
- 65-1210
- 65-1211
- 65-1212
- 65-1213
- 65-1214
- 65-1215



Pull Chain Models
- 65-1212
- 65-1213



PIR Sensor Models
- 65-1214
- 65-1215

PIR Sensor Specifications:
- Max Installation: 3m / 9.84'
- Detection Distance: 2.5m / 8.2'
- No Detection Shut Off Time: 5 Minutes

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Specifications are subject to change without prior notice.

Replacement wattage shown depends on application and fixture.

Visit satco.com/service/warranty for complete warranty details.

SATCO.COM | 800-437-2826

© Satco Products, Inc. All rights reserved. 12/24 SN1723