

LED STRIP FIXTURES

STANDARD | CONNECTABLE



5 CCT SELECTABLE

**90 CRI HIGH QUALITY
ILLUMINATION**

**STANDARD MODELS ARE
CLOSET RATED**

**CONNECTABLE MODELS ARE
HARD WIRE OR PLUG-IN**


SUGGESTED APPLICATIONS

Kitchens
Workspaces
Laundry Rooms
Utility Rooms
Garages



ColorQuick®

Selectable Color Technology



SATCO|NUVO's LED strip fixtures are available in both standalone and connectable models, each offering 5 CCT selectable technology and a high 90 CRI rating for exceptional illumination. The connectable models, with accessories sold separately, allow linking up to 10 units for the 4-foot fixture, 15 units for the 2-foot, and an impressive 30 units for the 1-foot fixture. Our standalone models meet NEC compliance for closet use, expanding their versatility. Both versions come in a variety of sizes, enabling tailored lighting solutions for compact spaces or expansive warehouse areas. Designed for long-lasting performance and minimal maintenance, these fixtures deliver brighter, more efficient illumination, outperforming traditional fluorescent lighting.



GENERAL SPECIFICATIONS

Power Factor: 0.9
THD: <20%
Dimming: Non-Dimmable
Surge Protection Rating: 2.5kV
CCT Selectable: 2700K/3000K/3500K/4000K/5000K
CRI: 90
Efficacy: Up to 131 LPW
Closest Rating: Complies with NEC 410.16 (A)(3) & NEC 410.16 (C)(5)

Location Rating: Damp
Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)
Mounting Options: Surface Mount - Ceiling or Wall
Housing Construction: Steel
Lens Material: White/Polycarbonate
Functional Life: 50,000 Hours
Warranty: 5 Years


ITEM SPECIFICATIONS / ORDER INFO



Item	Size	Wrap Type	Max Lumens	Wattage	Input Voltage	Frequency	Input Current	Closest Rated
65-1220	2FT	Standard	1200	10W	120V-277V	50/60Hz	0.09A	Yes
65-1221	4FT	Standard	2500	19W	120V-277V	50/60Hz	0.16A	Yes
65-1222	1FT	Connectable	1000	10W	120V	60Hz	0.09A	No
65-1223	2FT	Connectable	2000	20W	120V	60Hz	0.16A	No
65-1224	4FT	Connectable	3100	30W	120V	60Hz	0.25A	No

DIMENSIONS / WEIGHTS

Item	Length (A)	Width (B)	Height (C)	Weight
65-1220	22.71"	1.46"	1.88"	1.03 Lbs.
65-1221	46.41"	1.46"	1.88"	1.94 Lbs.
65-1222	12.13"	1.56"	1.72"	0.71 Lbs.
65-1223	22.75"	1.56"	1.72"	1.16 Lbs.
65-1224	46.50"	1.56"	1.72"	2.09 Lbs.

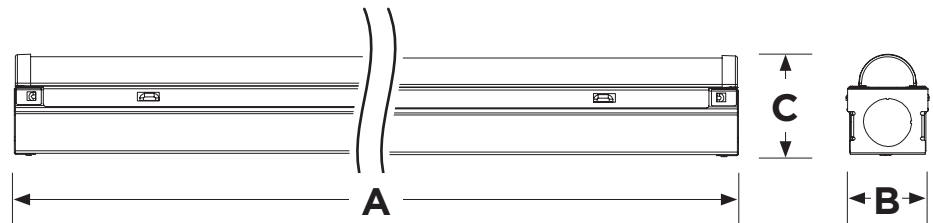

ACCESSORIES (SOLD SEPARATELY)

Item	Description	Compatible
65-1225	5 Foot Power Cord	65-1222, 65-1223 & 65-1224
65-1226	8 Inch Male/Male Joiner	65-1222, 65-1223 & 65-1224
65-1227	16 Inch Male/Male Joiner	65-1222, 65-1223 & 65-1224
65-1228	24 Inch Male/Male Joiner	65-1222, 65-1223 & 65-1224




*Male to Male Flush Connector Included with Fixture.



CCT Selectable Switch

- 65-1220
- 65-1221
- 65-1222
- 65-1223
- 65-1224

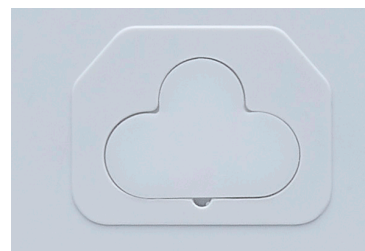

Connectability Port

- 65-1222
- 65-1223
- 65-1224

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

May not be compatible with all dimming ballasts. Visit satco.com for details.

Specifications are subject to change without prior notice.

Replacement wattage shown depends on application and fixture

Visit satco.com/service/warranty for complete warranty details.