



LED DOWNLIGHTS WITH NIGHT LIGHT

REMOTE DRIVER



CONVENIENT
REMOTE
DRIVER



INTEGRATED 3W NIGHT LIGHT

5-CCT SELECTABLE

EXCELLENT COLOR RENDERING

OFFERED IN ROUND &
SQUARE TRIMS


DURABLE ALUMINUM TRIM
AND ACRYLIC LENS

SUGGESTED APPLICATIONS


Residential
Multifamily
Hospitality



ColorQuick®
Selectable Color Technology



Integrated 3W
Night Light

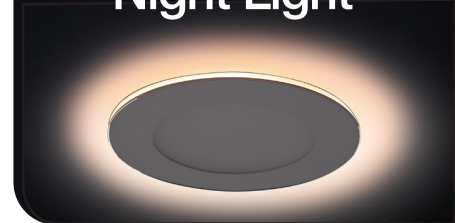

SATCO|NUVO's LED Downlights with Integrated Night Light provide a classic downlight with night light for additional ambiance control. Choose from five warm to cool CCTs at installation, connect an optional dimmer, or switch on-off-on at the wall plate to go from downlight to night light mode to create the perfect environment. Offered in 4" and 6" round and square trims to compliment any décor.



GENERAL SPECIFICATIONS

Input Voltage: 120V
Frequency: 50/60Hz
Power Factor: >0.9
Dimming: Phase-Cut Dimmable
 Down to 20%
Night Light Wattage: 3W
Night Light Lumens: 50
Downlight Efficacy: Up to 84 LPW
CRI: 90

Location Rating: Wet
Ambient Operating Temperature: -20°C (-4°F) to +45°C (+113°F)
IC Rated: Yes
AT Rated: Yes
Construction: Aluminum
Lens Construction: Acrylic
Functional Life: 50,000 Hours
Warranty: 5 Years




ITEM SPECIFICATIONS / ORDER INFO

Item	Shape	Size	Lumens	Wattage	Replacement Wattage	Input Current	CCT	Beam Angle
S11886	Round	4"	760	9W	65W	0.08A	2700K/3000K/3500K/4000K/5000K	108°
S11887	Round	6"	990	12W	75W	0.08A	2700K/3000K/3500K/4000K/5000K	109°
S11888	Square	4"	760	9W	65W	0.08A	2700K/3000K/3500K/4000K/5000K	107°
S11889	Square	6"	990	12W	75W	0.08A	2700K/3000K/3500K/4000K/5000K	109°

OPTIONAL ACCESSORIES (SOLD SEPARATELY)

Item	Description	
80-864	REMOTE DRIVER 6' EXTENSION CABLE - 4 PIN	
80-865	4" NEW CONSTRUCTION PLATE	
80-866	6" NEW CONSTRUCTION PLATE	
80-867	3.5"/4"/6"/8" UNIVERSAL NEW CONSTRUCTION PLATE	
80-943	4" NEW CONSTRUCTION PLATE WITH HANG BARS	
80-944	6" NEW CONSTRUCTION PLATE WITH HANG BARS	
80-950	4" NEW CONSTRUCTION PLATE	
80-952	6" NEW CONSTRUCTION PLATE	
80-997	HANGER BAR KIT FOR USE WITH 80-865 AND 80-866	

Item	Length (A)	Width/Diameter (B)	Height (C)	Weight
S11886	-	4.88"	0.95"	0.72 Lbs
S11887	-	6.85"	0.95"	1.00 Lbs
S11888	4.88"	4.88"	0.95"	0.76 Lbs
S11889	6.85"	6.85"	0.95"	1.08 Lbs

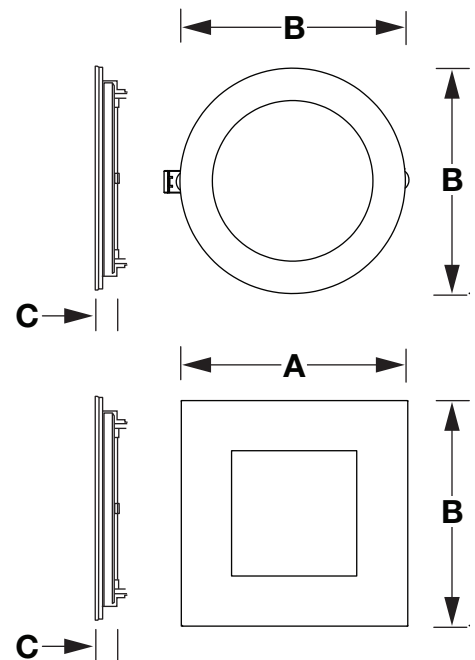

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Fixture may not be compatible with all dimmers. See satco.com for dimming compatibility.

Not for use with emergency drivers as only the night light will be activated in the event of a power loss.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65.

Please refer to your product packaging for more information.

Replacement wattage shown depends on application and fixture.

Specifications are subject to change without prior notice.

PHOTOMETRICS


4/6" Round Models

SATCO Item: S11886

Description: 9WLED/DW/4/CCT-SEL/RND/RD/NL
 ColorQuick Setting: 2700K
 802 LM, 8.99 W, 89 LPW
 Beam Angle: 108°
 Field Angle: 159°
 Spacing Criteria (0°-180°): 1.24
 Spacing Criteria (90°-270°): 1.25

Zonal Lumens		
Zone	Lumens	%Luminaire
0-30°	228	28.4%
0-40°	371	46.3%
0-60°	644	80.3%
0-90°	802	100.0%
90-180°	0	0.0%
0-180°	802	100.0%

Lumen Multiplier		
2700K	3000K	3500K
1.00	1.03	1.06
1.08	1.07	1.07



Illumination at Distance


Distance	Center Beam	Beam Spread
4ft	18fc	11.0ft
6ft	8fc	16.5ft
8ft	5fc	22.1ft
10ft	3fc	27.6ft
12ft	2fc	33.1ft

SATCO Item: S11887

Description: 12WLED/DW/6/CCT-SEL/RND/RD/NL
 ColorQuick Setting: 2700K
 1073 LM, 11.93 W, 90 LPW
 Beam Angle: 109°
 Field Angle: 160°
 Spacing Criteria (0°-180°): 1.22
 Spacing Criteria (90°-270°): 1.23

Zonal Lumens		
Zone	Lumens	%Luminaire
0-30°	300	27.9%
0-40°	488	45.5%
0-60°	853	79.5%
0-90°	1073	100.0%
90-180°	0	0.0%
0-180°	1073	100.0%

Lumen Multiplier		
2700K	3000K	3500K
1.00	1.02	1.05
1.07	1.07	1.08



Illumination at Distance

Distance	Center Beam	Beam Spread
4ft	24fc	11.2ft
6ft	11fc	16.8ft
8ft	6fc	22.4ft
10ft	4fc	28.0ft
12ft	3fc	33.6ft


4/6" Square Models

SATCO Item: S11888

Description: 9WLED/DW/4/CCT-SEL/SQ/RD/NL
 ColorQuick Setting: 2700K
 740 LM, 8.93 W, 83 LPW
 Beam Angle: 107°
 Field Angle: 159°
 Spacing Criteria (0°-180°): 1.21
 Spacing Criteria (90°-270°): 1.22

Zonal Lumens		
Zone	Lumens	%Luminaire
0-30°	210	28.4%
0-40°	341	46.3%
0-60°	590	80.3%
0-90°	740	100.0%
90-180°	0	0.0%
0-180°	740	100.0%

Lumen Multiplier		
2700K	3000K	3500K
1.00	1.05	1.09
1.10	1.10	1.10



Illumination at Distance


Distance	Center Beam	Beam Spread
4ft	17fc	10.8ft
6ft	8fc	16.2ft
8ft	4fc	21.6ft
10ft	3fc	27.0ft
12ft	2fc	32.4ft

SATCO Item: S11889

Description: 12WLED/DW/6/CCT-SEL/SQ/RD/NL
 ColorQuick Setting: 2700K
 1034 LM, 11.99 W, 86 LPW
 Beam Angle: 109°
 Field Angle: 160°
 Spacing Criteria (0°-180°): 1.22
 Spacing Criteria (90°-270°): 1.24

Zonal Lumens		
Zone	Lumens	%Luminaire
0-30°	290	28.0%
0-40°	472	45.6%
0-60°	823	79.6%
0-90°	1034	100.0%
90-180°	0	0.0%
0-180°	1034	100.0%

Lumen Multiplier		
2700K	3000K	3500K
1.00	1.02	1.07
1.08	1.08	1.09



Illumination at Distance

Distance	Center Beam	Beam Spread
4ft	24fc	11.2ft
6ft	11fc	16.7ft
8ft	6fc	22.3ft
10ft	4fc	27.9ft
12ft	3fc	33.5ft