



**TYPE III DISTRIBUTION**

**IK08 IMPACT RESISTANT**

**0-10V DIMMING**

**UV STABILIZED  
POWDER COATED**

**DIE-CAST ALUMINUM  
CONSTRUCTION**

**3 SOFT TO NATURAL  
LIGHT SETTINGS**

**SUGGESTED APPLICATIONS**

Walkways  
Warehouses  
Office Buildings  
Hospitality

# LED ENTRYWAY WALL PACK

## INTEGRATED BY-PASSABLE PHOTOCELL



Elevate the lighting of your entryways with SATCO|NUVO's premium LED wall packs that combine durability, versatility, and style. Featuring an integrated by-passable photocell, these fixtures are crafted with robust die-cast aluminum construction and a resilient IK08 polycarbonate lens, ensuring reliable performance in demanding conditions. Available in sleek black, bronze, and white finishes, they effortlessly complement a variety of architectural designs. With field-selectable wattages of 10W, 15W, and 20W and adjustable CCT options of 3000K, 4000K, and 5000K, these wall packs provide customized illumination for any setting. Rated for wet locations and IP65 certified, they deliver dependable performance for up to 50,000 hours. Backed by a 5-year warranty and DLC Premium certification, these wall packs are a stylish and reliable solution for modern outdoor lighting.



### GENERAL SPECIFICATIONS

**Range Voltage, Frequency:** 120V-347V, 50/60Hz  
**THD:** <20%  
**Dimming:** 0-10V Dimming Only  
**Surge Protection Rating:** 2.5kV  
**Photocell:** Integrated By-Passable Photocell  
**Efficacy:** up to 141 LPW  
**Input Current:** 0.08-0.03/0.13-0.04/0.17-0.06A  
**CRI:** 80+

**BUG Rating:** B1-U3-G3  
**Beam Angle:** 100°  
**Location Rating:** Wet  
**IP Rating:** IP65  
**IK Rating:** IK08  
**Ambient Operating Temperature:** -40°C (-40°F) to +50°C (+122°F)  
**Functional Life:** 50,000 Hours  
**Warrenty:** 5 Years


### ITEM SPECIFICATIONS / ORDER INFO



Item	Finish	Material/Lens Material	Lumen Range	Wattage Selectable	CCT Selectable	DLC ID
65-985	Black	Die-Cast Aluminum/PC	1410-2839	10W/15W/20W	3000K/4000K/5000K	S-BXPL7Q
65-986	Bronze	Die-Cast Aluminum/PC	1410-2839	10W/15W/20W	3000K/4000K/5000K	S-M49CQ5
65-987	White	Die-Cast Aluminum/PC	1410-2839	10W/15W/20W	3000K/4000K/5000K	S-MGDDN0

### DIMENSIONS

Item	(A) Width	(B) Height	(C) Extends	(D) Weight
65-985	6.86"	10.96"	4.53"	2.64 Lbs.
65-986	6.86"	10.96"	4.53"	2.64 Lbs.
65-987	6.86"	10.96"	4.53"	2.64 Lbs.

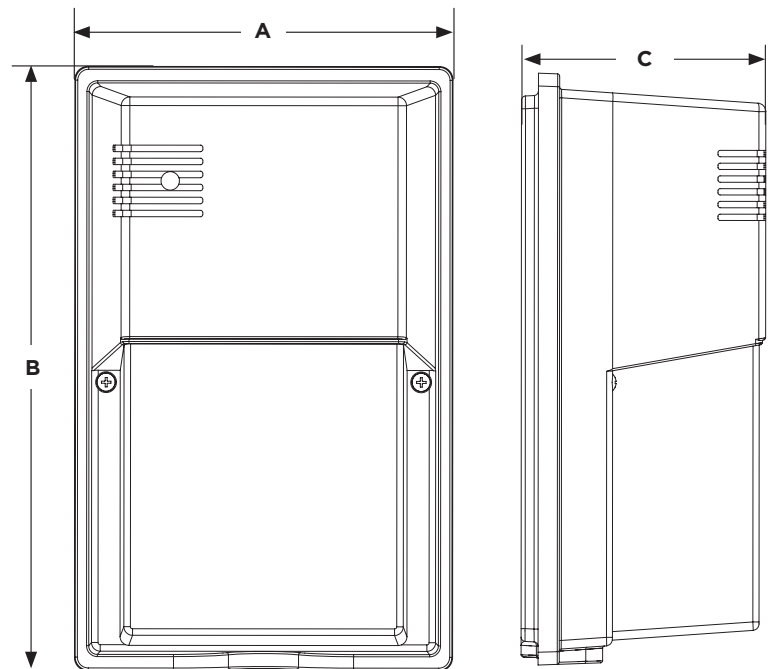

### FEATURES



Photocell  
On/Off Switch



Wattage and  
CCT Selectable Switch

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Visit [satco.com/service/warranty](http://satco.com/service/warranty) for complete warranty details.

Fixture may not be compatible with all dimmers.

CAN ICES-005 (A) Meets requirements of ICES-005 issue 5 class A for use in commercial applications.

Specifications are subject to change without prior notice.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.