

ORBIT COLLECTION

CCT SELECTABLE | 120V-277V



3 CCT SELECTABLE

**FLUSH MOUNT OR
PENDANT STYLE**

BLACK OR WHITE FINISHES

CONTEMPORARY DESIGN

90 CRI HIGH QUALITY LIGHT

SUGGESTED APPLICATIONS

Hallways
Entryways
Kitchens
Bathrooms
Dining Rooms
Common Areas



ColorQuick®
Selectable Color Technology

Discover the Orbit Collection—a seamless blend of style, adaptability, and sustainability. These innovative fixtures feature CCT selectable technology, allowing you to choose from 3000K, 4000K, or 5000K to create the perfect ambiance for any setting. With range voltage compatibility from 120-277V, the Orbit Collection ensures dependable performance across diverse applications. Available in two sophisticated styles—flush mount or pendant—and finished in classic black or white, these fixtures bring a timeless glow to your surroundings. Illuminate your space with SATCO|NUVO's Orbit lighting fixtures, where cutting-edge technology meets enduring design, offering energy efficiency and lasting brilliance.



GENERAL SPECIFICATIONS

Range Voltage: 120V-277V

Frequency: 60Hz

CCT Selectable: 3000K/4000K/5000K

Dimming: Dimmable down to 20%

CRI: 90

Construction Material: Steel

Lens Material: Acrylic

Functional Life: 30,000 Hours

Warranty: 3 Years




ITEM SPECIFICATIONS / ORDER INFO


Item Number	Fixture Type	Finish	Max Lumens	Wattage	Efficacy	Certification Type
62-1451R1	Flush Mount	White	1539	20W	up to 76 LPW	Damp
62-1452R1	Flush Mount	Black	1539	20W	up to 76 LPW	Damp
62-1453R1	Flush Mount	White	2314	30W	up to 77 LPW	Damp
62-1454R1	Flush Mount	Black	2314	30W	up to 77 LPW	Damp
62-1455R1	Pendant	White	1539	20W	up to 76 LPW	Dry
62-1456R1	Pendant	Black	1539	20W	up to 76 LPW	Dry
62-1457R1	Pendant	White	2314	30W	up to 77 LPW	Dry
62-1458R1	Pendant	Black	2314	30W	up to 77 LPW	Dry

DIMENSIONS / WEIGHTS

Item Number	Height (A)	Diameter (B)	Weight
62-1451R1	6.06"	17.75"	5.46 Lbs.
62-1452R1	6.06"	17.75"	5.46 Lbs.
62-1453R1	6.00"	23.50"	7.08 Lbs.
62-1454R1	6.00"	23.50"	7.08 Lbs.
62-1455R1	4.38"	17.75"	4.86 Lbs.
62-1456R1	4.38"	17.75"	4.86 Lbs.
62-1457R1	4.38"	23.50"	6.27 Lbs.
62-1458R1	4.38"	23.50"	6.27 Lbs.

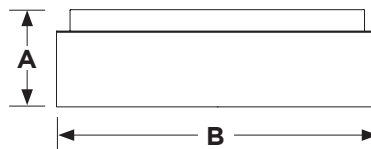


62-1451R1 / 62-1452R1

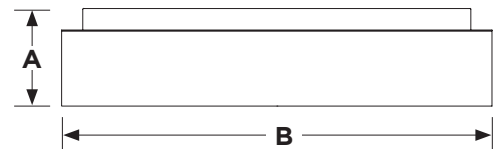


62-1453R1 / 62-1454R1

INSTALLED DIMENSIONS

Item Number	Max Height (C)	Canopy Height (D)	Canopy Diameter (E)
62-1451R1	N/A	N/A	N/A
62-1452R1	N/A	N/A	N/A
62-1453R1	N/A	N/A	N/A
62-1454R1	N/A	N/A	N/A
62-1455R1	150.00"	1.50"	6.88"
62-1456R1	150.00"	1.50"	6.88"
62-1457R1	150.00"	1.50"	6.88"
62-1458R1	150.00"	1.50"	6.88"

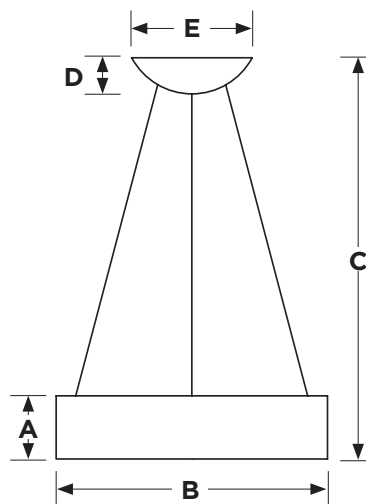

62-1455R1 / 62-1456R1

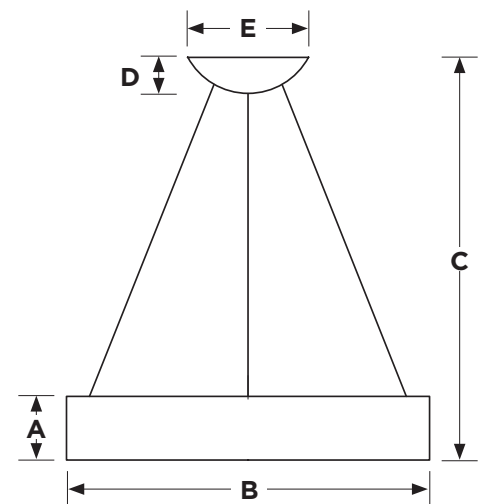

62-1457R1 / 62-1458R1

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Meets requirements of ICES-005 issue 5 class B for use in residential applications.

Replacement wattage shown depends on application and fixture. Specifications are subject to change without prior notice.

SATCO.COM | 800-437-2826

© Satco Products, Inc. All rights reserved. Rev. 01/25 SN1757