

# LED FULL CUTOFF WALL PACK

INTEGRATED SENSOR PORT & BY-PASSABLE PHOTOCELL | FIELD SELECTABLE



65-555



**FULL CUTOFF WITH ZERO UP LIGHT**

**INTEGRATED BY-PASSABLE PHOTOCELL**

**FIELD SELECTABLE (WATTAGE AND CCT)**

**INTEGRATED SENSOR PORT**

**120V-347V RANGE VOLTAGE**

**SUGGESTED APPLICATIONS**

- Walkways
- Warehouses
- Office Buildings
- Schools
- Hospitality
- Retail

Illuminate outdoor spaces with SATCO|NUVO's architecturally styled LED Full Cutoff Wall Packs. Operating on 120-347V with zero up light, these cutoff wall packs are perfect to eliminate wasted light and to cut down on light pollution. A by-passable photocell and built-in sensor port provide added control, with an optional sensor (sold separately) for customizable detection. The durable bronze die-cast aluminum housing complements building exteriors, while two models offer field-selectable wattages, adjustable CCT, and high-lumen output. Designed for durability, they are wet-location rated, IP65 rated, and last 50,000 hours. Backed by DLC Premium certification and a 5-year warranty, these wall packs deliver reliable, adaptable illumination.



**GENERAL SPECIFICATIONS**

**Range Voltage:** 120V-347V  
**Frequency:** 50/60Hz  
**Power Factor:** >0.9  
**THD:** <20%  
**Dimmable:** 0-10V Dimming  
**Surge Protection Rating:** 6kV  
**CRI:** 80+  
**Distribution Type:** Type II  
**Bug Rating:** B2-UO-G2  
**CCT Selectable:** 3000K/4000K/5000K





**Location Rating:** Wet  
**IP Rating:** IP65  
**IK Rating:** IK06  
**Ambient Operating Temperature:** -40°C (-40°F) to +50°C (+122°F)  
**Lens Material:** Polycarbonate  
**Housing Material:** Die-Cast Aluminum  
**Housing Color:** Bronze  
**Functional Life:** 50,000 Hours  
**Warranty:** 5 Years



**ITEM SPECIFICATIONS / ORDER INFO**


Item	Lumen Range	Wattage Selectable	Max HID Equivalent	Input Current	Efficacy	DC ID
65-555	3,056-8,421	20W/40W/60W	250W	0.17-0.06/0.33-0.12/0.50-0.17A	Up to 158 LPW	S-45Y2JF
65-556	12,107-17,789	80W/100W/120W	400W	0.67-0.23/0.83-0.29/1.00-0.35A	Up to 206 LPW	S-CW1MVQ

**OPTIONAL ACCESSORIES (SOLD SEPARATELY)**

Item	Description	
86-217	ADD ON 6 METER PIR SENSOR	
86-218	ADD ON 12 METER MICROWAVE SENSOR	
86-220	ADD ON 12 METER PIR SENSOR	
86-219	REMOTE CONTROL FOR ADD ON SENSORS	

**DIMENSIONS / WEIGHTS**

Item	Height (A)	Width (B)	Extends (C)	Weight
65-555	9.36"	10.65"	6.85"	7.94 Lbs
65-556	8.11"	13.28"	9.36"	9.74 Lbs

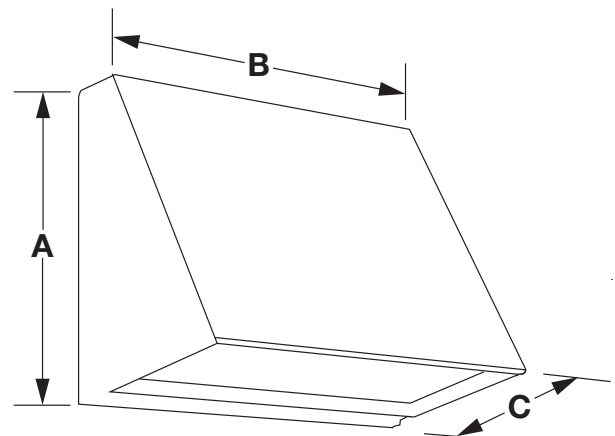

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CAN ICES-005 (A) Meets requirements of ICES-005 issue 5 class A for use in commercial applications.

Lamps may not be compatible with all dimmers. See [satco.com](http://satco.com) for details.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65.

Please refer to your product packaging for more information.

Replacement wattage shown depends on application and fixture.

Specifications are subject to change without prior notice.

Visit [satco.com/service/warranty](http://satco.com/service/warranty) for complete warranty details.