

# LED RUNNING MAN SIGNS

BATTERY BACKUP | WET LOCATION



**SINGLE OR DUAL FACE**

**INTEGRATED BATTERY  
BACKUP**

**INTERCHANGEABLE  
PICTOGRAMS**

**TWO ADJUSTABLE LIGHT  
HEADS (COMBO UNITS)**

**CEILING, WALL OR SIDE  
MOUNT; ACCESSORIES  
INCLUDED**

**THERMOPLASTIC HOUSING**

## SUGGESTED APPLICATIONS

Parking Garage  
Cold Storage  
Corridors

Keep your building safe and secure with the SATCO|NUVO LED Running Man Signs and Emergency Light Combos. Choose single or dual-face installation and customize with the interchangeable pictograms to fit your needs. Combo models offer two adjustable light heads to provide ample illumination in the event of an emergency for up to two hours with the integrated battery backup. Designed for use in wet locations, select models are also rated for use in low temperature applications such as cold storage or refrigerated units.



### GENERAL SPECIFICATIONS

**Dual Voltage:** 120V/247V  
**Emergency Battery Backup:** Yes  
**Recharge Time:** 4 Hours  
**Battery Push-to-Test Button:** Yes  
**Battery Type:** Ni-MH

**Life Cycles:** >500  
**Location Rating:** Wet  
**Construction:** Thermoplastic  
**Universal Mounting:** Ceiling, Wall or Side with Included Accessories  
**Warranty:** 2 Years


### ITEM SPECIFICATIONS / ORDER INFO





Item	Wattage	Lumens	Face Type	Location Rating	Operating Temperature	Cold Temperature Operation	Battery Run Time	Remote Capable
<b>Running Man Sign</b>								
67-560	2.8W	N/A	Single/Dual	Wet	0°C (+32°F) to +50°C (+122°F)	No	120 Min.	No
67-561	2.8W	N/A	Single/Dual	Wet	-25°C (-13°F) to +50°C (+122°F)	Yes	120 Min.	No
<b>Running Man Sign With Emergency Lights</b>								
67-570	4W	260	Single/Dual	Wet	0°C (+32°F) to +50°C (+122°F)	No	120 Min.	No
67-571	4W	160	Single/Dual	Wet	0°C (+32°F) to +50°C (+122°F)	No	120 Min.	Yes
67-572	4W	260	Single/Dual	Wet	-25°C (-13°F) to +50°C (+122°F)	Yes	120 Min.	No
67-573	4W	160	Single/Dual	Wet	-25°C (-13°F) to +50°C (+122°F)	Yes	120 Min.	Yes

### DIMENSIONS / WEIGHTS

Item	Width (A)	Height (B)	Depth (C)	Weight
67-560	13.00"	8.86"	2.50"	4.25 Lbs.
67-561	13.00"	8.86"	2.50"	4.25 Lbs.
67-570	13.00"	13.91"	2.50"	5.07 Lbs.
67-571	13.00"	13.91"	2.50"	5.07 Lbs.
67-572	13.00"	13.91"	2.50"	5.07 Lbs.
67-573	13.00"	13.91"	2.50"	5.07 Lbs.

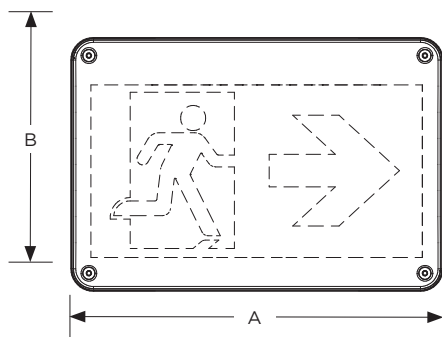

67-560 & 67-561

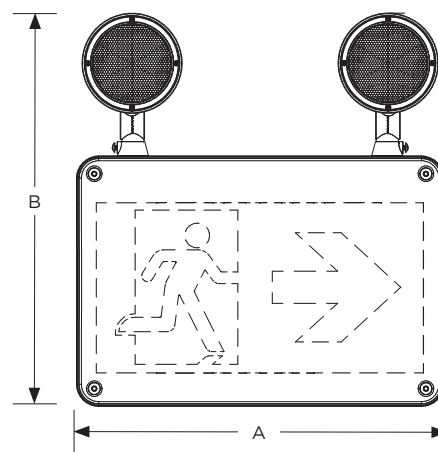

67-570 THRU 67-573









This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Meets requirements of ICES-005 issue 5 class B for use in residential applications.

**WARNING:** Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Specifications are subject to change without prior notice.  
 Visit [satco.com/service/warranty](http://satco.com/service/warranty) for complete warranty details.

### OPTIONAL ACCESSORIES (SOLD SEPARATELY)

Item	Description	Wattage	Lumens	Location Rating	
67-134	Single Remote Head	0.75W	60	Damp	
67-135	Dual Remote Head	1.5W	120	Damp	
67-136	Single Remote Head	1W	100	Wet	
67-140	Single Remote Head	0.75W	75	Wet	
67-141	Dual Remote Head	1.5W	150	Wet	
67-142	Single Remote Head	0.75W	75	Wet	
67-143	Dual Remote Head	1.5W	150	Wet	