

LED EDGE LIT RUNNING MAN SIGNS BATTERY BACKUP



SINGLE OR DUAL FACE

**INTEGRATED BATTERY
BACKUP**

**INTERCHANGEABLE
PICTOGRAMS**

**TWO INTEGRATED LIGHT
HEADS (COMBO UNITS)**

**RECESSED MOUNTING;
ACCESSORIES INCLUDED**

SUGGESTED APPLICATIONS

Commercial &
Industrial, Garages
Retail
Schools
Hospitals

Keep your building safe and secure with the SATCO|NUVO LED Running Man Signs and Emergency Light Combos. These premium signs are field-customizable for single or dual face applications and include interchangeable pictogram films with direction arrows. Combo models offer two integrated lights to provide ample illumination in the event of an emergency for up to two hours with the battery backup. Optional High Output Combo model offers additional light output for high ceilings or greater spacings. With a clean aluminum faceplate and acrylic sign, ensure safety while maintaining an elevated look in any space.



GENERAL SPECIFICATIONS

Emergency Battery Backup: Yes
Recharge Time: 24 Hours
Battery Push-to-Test Button: Yes
Battery Type: Ni-Cad 3.6V
Life Cycles: >500

Location Rating: Damp
Construction: Aluminum & Acrylic
Mounting: Flush Recessed with Included Accessories
Warranty: 2 Years


ITEM SPECIFICATIONS / ORDER INFO



Item	Wattage	Lumens	Input Current	Face Type	Location Rating	Operating Temperature	Battery Run Time
Running Man Sign							
67-540	3W	N/A	120V-347V	Single/Dual	Damp	+10°C (+50°F) to +40°C (+104°F)	120 Min.
Running Man Sign With Emergency Lights							
67-550	3.5W	120	120V-347V	Single/Dual	Damp	+10°C (+50°F) to +40°C (+104°F)	120 Min.
67-551	3W	260	120V-347V	Single/Dual	Damp	+10°C (+50°F) to +40°C (+104°F)	120 Min.

DIMENSIONS / WEIGHTS

Item	Width (A)	Height (B)	Depth (C)	Weight
67-540	19.73"	10.63"	5.35"	6.61 Lbs.
67-550	19.73"	10.63"	5.35"	6.83 Lbs.
67-551	19.73"	10.63"	5.35"	6.83 Lbs.

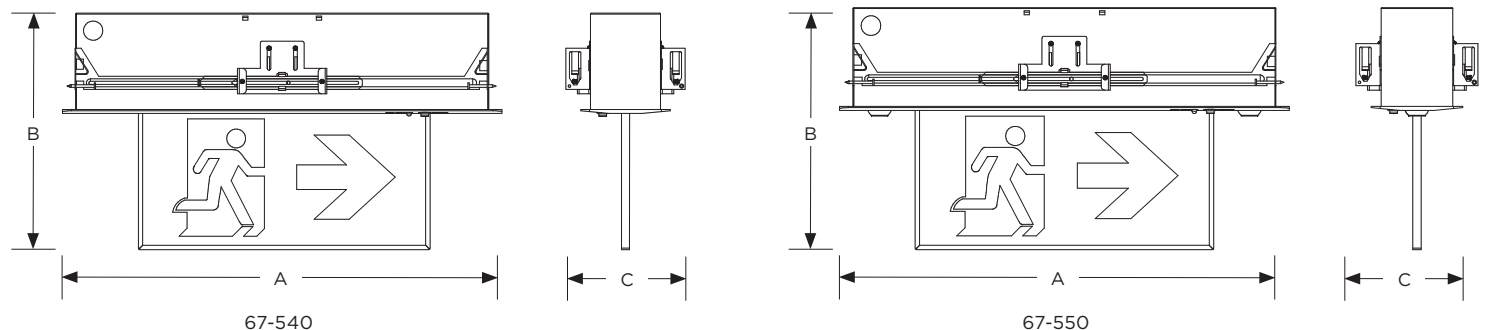

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Meets requirements of ICES-005 issue 5 class B for use in residential applications.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Specifications are subject to change without prior notice.
 Visit satco.com/service/warranty for complete warranty details.