

EMERGENCY LIGHTS

BATTERY BACKUP | WET LOCATION



**120V-347V FOR USE IN
THE USA AND CANADA**

SURFACE MOUNTING

**INTEGRATED BATTERY
BACKUP**

**REMOTE CAPABLE AND
LOW-TEMPERATURE MODELS
AVAILABLE**

SUGGESTED APPLICATIONS

Commercial & Industrial
Garages
Retail
Schools
Hospitals



Keep your building safe and secure with SATCO|NUVO LED Emergency Lights. Two adjustable light heads provide ample illumination in the event of an emergency for up to two hours with the integrated battery backup. All models are wet location rated for use indoors or outdoors. Models include low temperature operation and remote capable options which can be paired with additional remote heads for more comprehensive coverage.



GENERAL SPECIFICATIONS

Input Voltage, Frequency: 120V-347V, 60Hz

Emergency Backup: Yes

Emergency Duration/Run Time: 120 Minutes

Recharge Time: 24 Hours

Battery Push-to-Test Button: Yes

Battery Type: Ni-Cad 3.6V

Life Cycles: >500

Construction: Thermoplastic

Mounting Options: Surface

Warranty: 2 Years




ITEM SPECIFICATIONS / ORDER INFO

Item	Wattage	Lumens	Input Current	Location Rating	Operating Temperature	Low Temperature Operation	Battery Run Time	Remote Capable
67-580	3.5W	600	120V-347V	Wet	0°C (32°F) to 50°C (122°F)	No	120 Min.	No
67-581	3.5W	600	120V-347V	Wet	-25°C (-13°F) to 50°C (122°F)	Yes	120 Min.	No
67-582	3.5W	300	120V-347V	Wet	0°C (32°F) to 50°C (122°F)	No	120 Min.	Yes
67-583	3.5W	300	120V-347V	Wet	-25°C (-13°F) to 50°C (122°F)	Yes	120 Min.	Yes

DIMENSIONS / WEIGHTS

Item	Width (A)	Height (B)	Depth (C)	Weight
67-580	10.19"	11.56"	2.72"	2.20 Lbs.
67-581	10.19"	11.56"	2.72"	2.20 Lbs.
67-582	10.19"	11.56"	2.72"	2.20 Lbs.
67-583	10.19"	11.56"	2.72"	2.20 Lbs.

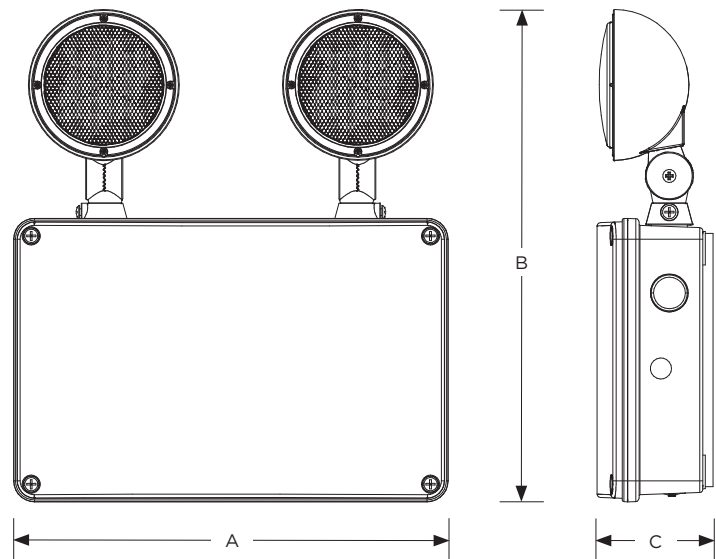

OPTIONAL ACCESSORIES (SOLD SEPARATELY)

Item	Description	Wattage	Lumens	Location Rating	
67-136	Single Remote Head	1W	100	Wet	
67-140	Single Remote Head	0.75W	75	Wet	
67-141	Dual Remote Head	1.5W	150	Wet	

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Meets requirements of ICES-005 issue 5 class B for use in residential applications.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Specifications are subject to change without prior notice.
Visit satco.com/service/warranty for complete warranty details.