



Wireless Networked Controlled Linear High Bay

with PIR & Daylight Harvesting Sensor

FEATURES

- DOMINO™ High Bay Sensor included
- Interchangeable optical lenses
- 41" Suspension kit included
- Flicker free driver
- Bluetooth® mesh network for wireless communication
- Easy commissioning with DOMINO™ App (Available in IOS and Android)

ORDER INFO

Item	Watts	Lumens	Input Current	DLC ID	UPC
68-131	155W	20321/21714/21502	1.29-0.45A	S-MYVCK9	045923683503
68-132	320W	42411/45598/44422	2.67-0.92A	S-WXTD1X	045923683510

GENERAL SPECIFICATIONS

Input Voltage	120V-347V
Frequency	50/60Hz
Power Factor, THD%	>0.9, <20%
Surge Protection Rating	6kV
CRI	80
Efficacy	Up to 142 LPW
CCT Selectable	Yes
CCT	3000K/4000K/5000K
Beam Angle	90 x 90
Dimmable	App Controlled
Dimmable Down To	≤ 10%
Location Rating	Damp
IP Rating	IP20
Operating Temperature	-30°C (-22°F) to +55°C (+131°F)
Functional Life	50,000 Hours
Warranty	5 Years

CONSTRUCTION

Housing Material	Die-Cast Aluminum
Housing Finish	White
Lens Material	Polycarbonate (PC)

COMPLIANCE

Safety Listing	cULus Listed
FCC Compliant	Yes
ICES-005 Compliant	Yes
DLC	Yes

SENSOR SPECIFICATIONS*


Sensor Type	Daylight Harvest, PIR Motion Sensor
Sensor Field of View	360°
Sensor Detection Height	40 ft Max
Sensor Hold Delay	App Controlled
Sensor Standby Delay	App Controlled
Sensor Mounting Type	Fixture Mount

*Additional Sensor information on page 4




DIMENSIONS

Item	Length (A)	Width (B)	Height (C)	Weight
68-131	14.17"	11.02"	3.20"	5.07 Lbs.
68-132	23.03"	12.60"	3.20"	8.38 Lbs.

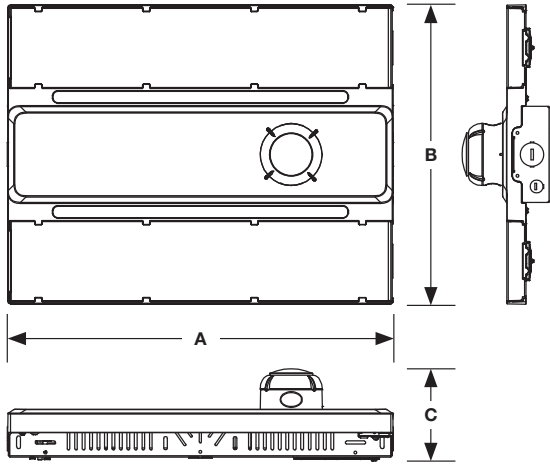

68-131

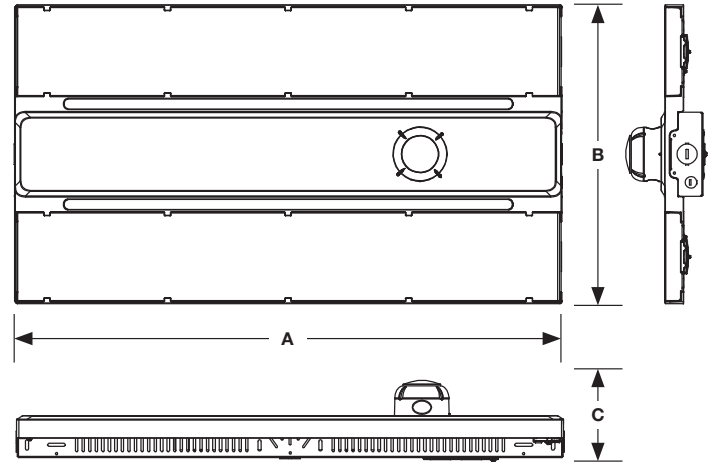

68-132

DOWNLOADS



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Meets requirements of ICES-005 issue 5 class A for use in commercial applications.







CAUTION - RISK OF ELECTRIC SHOCK. Do not use if outer lamp envelope is damaged or broken.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by SATCO Products, Inc., is under license. Other trademarks and trade names are those of their respective owners.

Specifications are subject to change without prior notice.

OPTIONAL ACCESSORIES (SOLD SEPARATELY)


Item	Description	For Use With	
Lens Kit			
65-1019	45° X 90° DEGREE OPTIC SET OF 2	68-131	
65-1020	65° X 65° DEGREE OPTIC SET OF 2	68-131	
65-1021	110° X 110° DEGREE OPTIC SET OF 2	68-131	
65-1022	45° X 90° DEGREE OPTIC SET OF 2	68-132	
65-1023	65° X 65° DEGREE OPTIC SET OF 2	68-132	
65-1024	110° X 110° DEGREE OPTIC SET OF 2	68-132	

110° x 110°





65° x 65°

45° x 90°

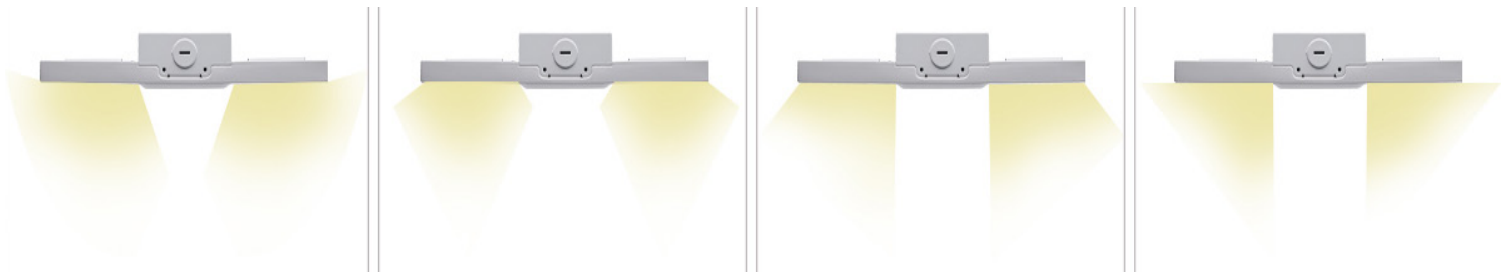
90° x 90°
(included)



Mounting Kits

65-1014	PENDANT MOUNT KIT LED HIGH BAY	68-131 & 68-132	
65-1015	SURFACE MOUNT KIT LED HIGH BAY	68-131 & 68-132	
65-1016	CAGE FOR 1.2' LINEAR HIGH BAY	68-131	
65-1018	CAGE FOR 2' LINEAR HIGH BAY	68-132	

Emergency Backup Battery

65-1517	ADD ON EMERGENCY BACKUP BATTERY	68-131 & 68-132	
---------	---------------------------------	-----------------	---



High Bay Sensor

with Integrated PIR & Daylight Harvesting

The DOMINO™ High Bay Sensor module is designed for high bay luminaires, combining PIR motion detection and daylight harvesting in a single compact unit. Built on Bluetooth® mesh technology with advanced occupancy sensing to enhance detection accuracy and reduce false triggers, it provides real-time lighting adjustments based on occupancy and ambient light levels—enabling intelligent, energy-efficient control across large scale commercial and industrial environments.

FEATURES

- Bluetooth® mesh network for wireless communication
- Direct control - no hub or gateway needed
- Built-in PIR motion and daylight harvesting sensor
- Supports mounting heights from 20-40 ft
- Compatible with 0-10V dimming systems
- Easy commissioning with DOMINO™ App (Available in IOS and Android)

GENERAL SPECIFICATIONS

Voltage	DC 12V
Input Current (Amps)	50mA Max
Sinking Current	10mA Max
Operating Temperature	-30°C to 55°C, -22°F to 131°F
Location Rating	Dry
IP Rating	IP40

Communication Protocol	Bluetooth Mesh
BLE Control Node	Yes
Bluetooth Mesh Range	100 ft
Software Supported	DOMINO™ App
Upgradeable Firmware	Yes

Sensor Type	Daylight Harvest, PIR Motion Sensor
Sensor Field of View	360°
Sensor Detection Height	40 ft Max
Sensor Hold Delay	App Controlled
Sensor Standby Delay	App Controlled
Sensor Mounting Type	Fixture Mount

Dimming Technology	0-10V
Tuneable Capable	Yes

Encryption	128-bit AES-CCM
Cybersecurity	UL1376
Radio Frequency	2.4GHz ± 75MHz
Factory Reset Type	Power Cycle

CONSTRUCTION


Construction Material	Thermoplastic, Acrylic Lens
Construction Finish	White
Connector Port	AUX

COMPLIANCE

Safety Listing	UL
FCC	Yes
FCC ID Number	2A26YLTKTVT2021
ICES-005	Yes
DLC Classification	DLC NLC Listed
DLC ID	N-XS2QN3
Warranty	5 Years




WIRING


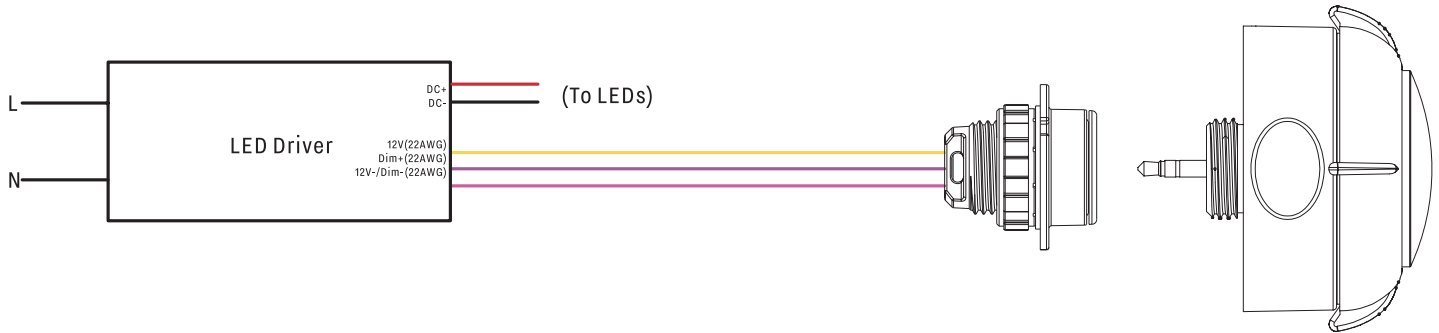


DIMENSIONS

Length (A)	Width (B)	Height (C)
2.6" (66mm)	2.6" (66mm)	2.36" (60mm)

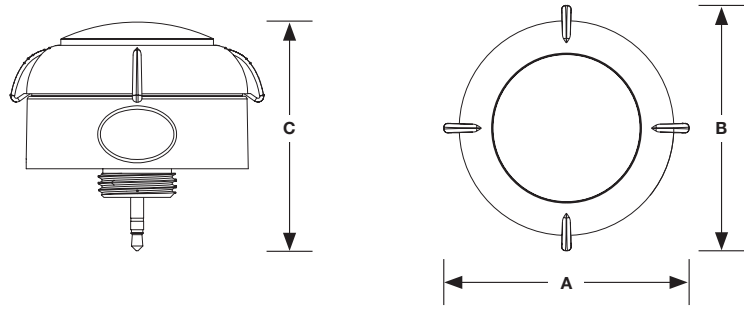

COVERAGE

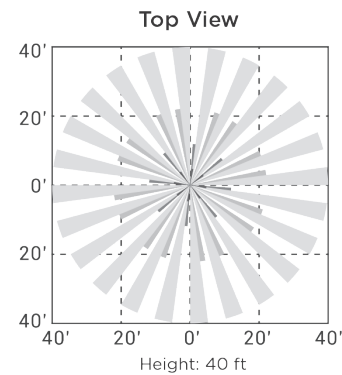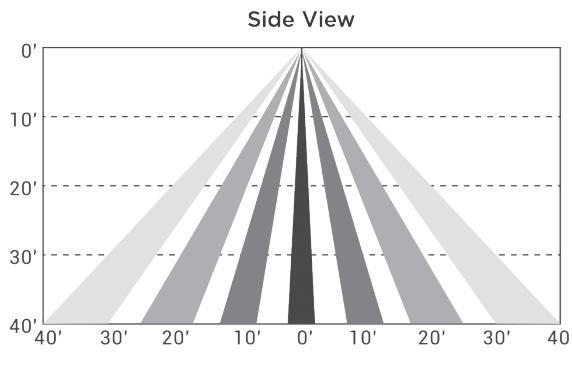

COMPATIBLE WITH FIXTURES*

68-131
68-132

DOWNLOADS



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
CAUTION - RISK OF ELECTRIC SHOCK. Do not use if outer lamp envelope is damaged or broken.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by SATCO Products, Inc., is under license. Other trademarks and trade names are those of their respective owners.

Specifications are subject to change without prior notice.

*Fixture compatible SKUs are subject to change