

Project Name _____
 Catalog # _____
 Type _____
 Notes _____

Wireless Networked Controlled Full Cutoff Wall Pack

with PIR & Daylight Harvesting Sensor



FEATURES

- Integrated low profile sensor
- CCT Selectable control
- Bluetooth® mesh network for wireless communication
- Sensor supports mounting heights up to 40 ft
- Easy commissioning with DOMINO™ App (Available in IOS and Android)
- Die-Cast Aluminum Body

ORDER INFO

Item	Wattage	Lumens	Input Current	DLC ID	UPC
68-195	80W	10608/11315/10623	0.67-0.23A	S-QW9GJ6	045923683671
68-196	120W	16928/17789/17060	1.00-0.35A	S-VGJPYM	045923683688

GENERAL SPECIFICATIONS

Input Voltage	120V-347V
Frequency	50/60Hz
Power Factor, THD%	>0.9, <20%
Surge Protection Rating	6kV
CRI	80
Max Efficacy	Up to 148 LPW
CCT Selectable	Yes
CCT	3000K/4000K/5000K
Beam Angle	108°
Dimmable	App Controlled
Dimmable Down To	≤ 10%

Location Rating	Wet
IP Rating	IP65
Operating Temperature	-30°C (-22°F) to +50°C (+122°F)
NEMA Distribution	Type II

Functional Life	50,000 Hours
Warranty	5 Years

CONSTRUCTION

Housing Material	Die-Cast Aluminum
Housing Finish	Bronze
Lens Material	Polycarbonate (PC)

COMPLIANCE

Safety Listing	cULus Listed
FCC Compliant	Yes
ICES-005 Compliant	Yes
DLC	Yes

SENSOR SPECIFICATIONS*


Sensor Type	PIR & Daylight Harvesting Sensor
Sensor Field of View	360°
Sensor Detection Height	40 ft Max
Sensor Coverage	20 ft: 1,250 SF; 40 ft: 4,500 SF
Sensor Hold Delay	App Controlled
Sensor Standby Delay	App Controlled
Sensor Mounting Type	Fixture Mount

*Additional Sensor information on page 3



DIMENSIONS

Item	Width (A)	Height (B)	Extends (C)	Weight
68-195	10.65"	10.50"	6.85"	7.94 Lbs.
68-196	13.28"	10.58"	8.11"	9.74 Lbs.

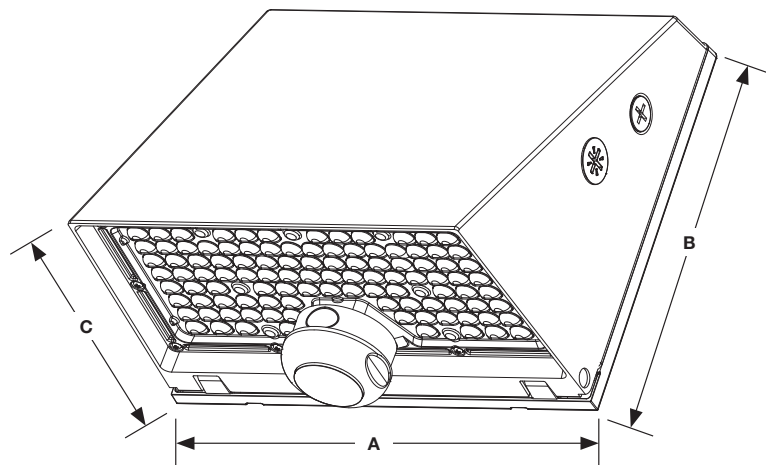

DOWNLOADS



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Meets requirements of ICES-005 issue 5 class A for use in commercial applications.

CAUTION - RISK OF ELECTRIC SHOCK. Do not use if outer lamp envelope is damaged or broken.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by SATCO Products, Inc., is under license. Other trademarks and trade names are those of their respective owners.

Specifications are subject to change without prior notice.



87-105

Outdoor Sensor

with Integrated PIR & Daylight Harvesting

The DOMINO™ Outdoor Sensor module is designed for integration into high bay, canopy, and area light fixtures in outdoor or wet location environments. Featuring PIR motion sensing and photocell functionality, it enables intelligent lighting control with high mounting accuracy. Built with a long-range Bluetooth® mesh antenna, it enhances occupancy detection while reducing false triggers.

FEATURES

- Long range Bluetooth® mesh network for wireless communication
- Photocell + PIR sensing technology
- Designed for outdoor/wet location environments
- UV-rated nylon housing
- Supports mounting heights from 20-40 ft
- Easy commissioning with DOMINO™ App (Available in IOS and Android)

GENERAL SPECIFICATIONS

Voltage	DC 12V
Input Current (Amps)	50mA Max
Sinking Current	10mA Max
Operating Temperature	-30°C to 55°C, -22°F to 131°F
Location Rating	Wet
IP Rating	IP66

Communication Protocol	Bluetooth Mesh
BLE Control Node	Yes
Bluetooth Mesh Range	328 ft
Software Supported	DOMINO™ App
Upgradeable Firmware	Yes

Sensor Type	Daylight Harvesting to Photocell
Sensor Field of View	360°
Sensor Detection Height	40 ft Max
Sensor Coverage	20 ft: 1,250 SF; 40 ft: 4,500 SF
Sensor Hold Delay	App Controlled
Sensor Standby Delay	App Controlled
Sensor Mounting Type	Fixture Mount

Dimming Technology	DOMINO™ Bluetooth Mesh
Tuneable Capable	No

Encryption	128-bit AES-CCM
Cybersecurity	UL1376
Radio Frequency	2.4GHz ± 75MHz
Factory Reset Type	Power Cycle

CONSTRUCTION


Construction Material	Thermoplastic, Acrylic Lens
Construction Finish	Black
Connector Port	AUX

COMPLIANCE

Safety Listing	UL
FCC	Yes
FCC ID Number	2A26YLTkTVT2021
ICES-005	Yes
DLC Classification	DLC NLC Listed
DLC ID	N-2BT3RZ
Warranty	5 Year




WIRING

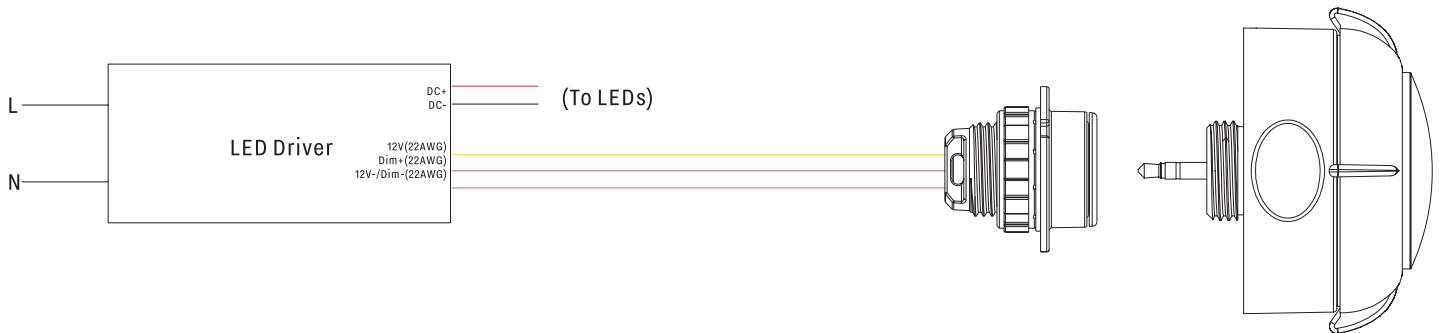


DIMENSIONS

Length (A)	Width (B)	Height (C)
2.5" (63.5mm)	2.5" (63.5mm)	2.43" (61.6mm)

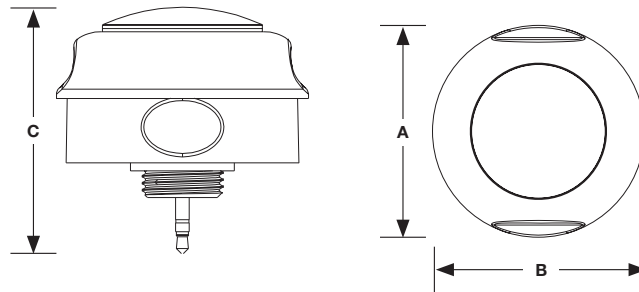


COVERAGE

Coverage Side View

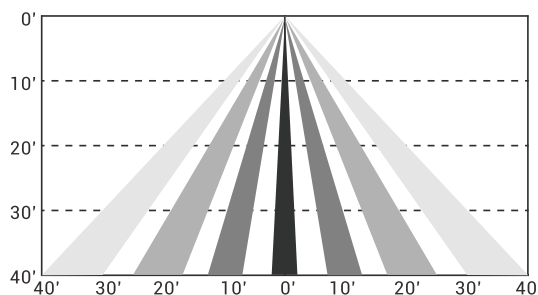

Coverage Top View



COMPATIBLE WITH FIXTURES*

68-195 68-196 68-201 68-202

DOWNLOADS



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. CAUTION - RISK OF ELECTRIC SHOCK. Do not use if outer lamp envelope is damaged or broken.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by SATCO Products, Inc., is under license. Other trademarks and trade names are those of their respective owners.

Specifications are subject to change without prior notice.

*Fixture compatible SKUs are subject to change