



**WARM DIMMING -
3000K TO 2000K**

**90 CRI FOR EXCEPTIONAL
COLOR RENDERING**

WET LOCATION RATED

**MULTIPLE LAMP SHAPES
AND BASE TYPES FOR ANY
GENERAL SERVICE OR
DECORATIVE APPLICATION**

SUGGESTED APPLICATIONS

Residential
Commercial
Hospitality
Retail

LED FILAMENT LAMPS

DIM TO WARM



SATCO|NUVO's new Dim to Warm filament lamps emulate the glow of traditional incandescent dimming, shifting smoothly from 3000K to a warm 2000K as they dim. This natural transition enhances comfort and ambiance, ideal for residential, hospitality, and decorative settings. Available in a range of shapes—including A19, G25, G40, ST19, B11, G15.5, and A15—with clear, frosted, or white glass finishes, the line includes both E26 and E12 base options. These 120V lamps deliver 450 or 800 lumens at just 4.5W or 8W, feature 360° degrees of illumination, 90 CRI for vivid color, and are rated for wet locations.



GENERAL SPECIFICATIONS

Input Voltage: 120V

Frequency: 60Hz

Power Factor: 0.7

Dimming: Warm Dimming - 3000K to 2000K

Efficacy: 100 LPW

CRI: 90

CCT: 3000K-2000K

Rated for Enclosed Fixtures: Yes

Beam Angle: 300°

Location Rating: Wet

Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)

Material: Aluminum/Glass

Functional Life: 15,000 Hours

Warranty: 3 Years




ITEM SPECIFICATIONS / ORDER INFO

Item	Lamp Shape	Lamp Base	Finish	Lumens	Wattage	Replacement Wattage	Input Current
S12150	A19	E26	Clear	800	8W	60W	0.09A
S12151	A19	E26	Frosted	800	8W	60W	0.09A
S12152	G25	E26	Clear	800	8W	60W	0.09A
S12153	G25	E26	White	800	8W	60W	0.09A
S12154	ST19	E26	Clear	800	8W	60W	0.09A
S12155	G40	E26	Clear	800	8W	60W	0.09A
S12156	G40	E26	White	800	8W	60W	0.09A
S12157	B11	E12	Clear	450	4.5W	40W	0.06A
S12158	B11	E12	Frosted	450	4.5W	40W	0.06A
S12159	B11	E26	Clear	450	4.5W	40W	0.06A
S12160	B11	E26	Frosted	450	4.5W	40W	0.06A
S12161	G16.5	E12	Clear	450	4.5W	40W	0.06A
S12162	G16.5	E12	White	450	4.5W	40W	0.06A
S12163	A15	E26	Clear	450	4.5W	40W	0.06A
S12164	A15	E26	Frosted	450	4.5W	40W	0.06A

DIMENSIONS / WEIGHTS

Item	MOL (A)	MOD (B)	Weight
S12150	4.33"	2.36"	0.07 Lbs.
S12151	4.33"	2.36"	0.07 Lbs.
S12152	4.53"	3.15"	0.09 Lbs.
S12153	4.53"	3.15"	0.09 Lbs.
S12154	4.96"	2.28"	0.08 Lbs.
S12155	6.89"	4.92"	0.20 Lbs.
S12156	6.89"	4.92"	0.20 Lbs.
S12157	3.78"	1.38"	0.04 Lbs.
S12158	3.78"	1.38"	0.04 Lbs.
S12159	3.54"	1.38"	0.06 Lbs.
S12160	3.54"	1.38"	0.06 Lbs.
S12161	3.31"	1.97"	0.04 Lbs.
S12162	3.31"	1.97"	0.04 Lbs.
S12163	3.42"	1.97"	0.06 Lbs.
S12164	3.42"	1.97"	0.06 Lbs.

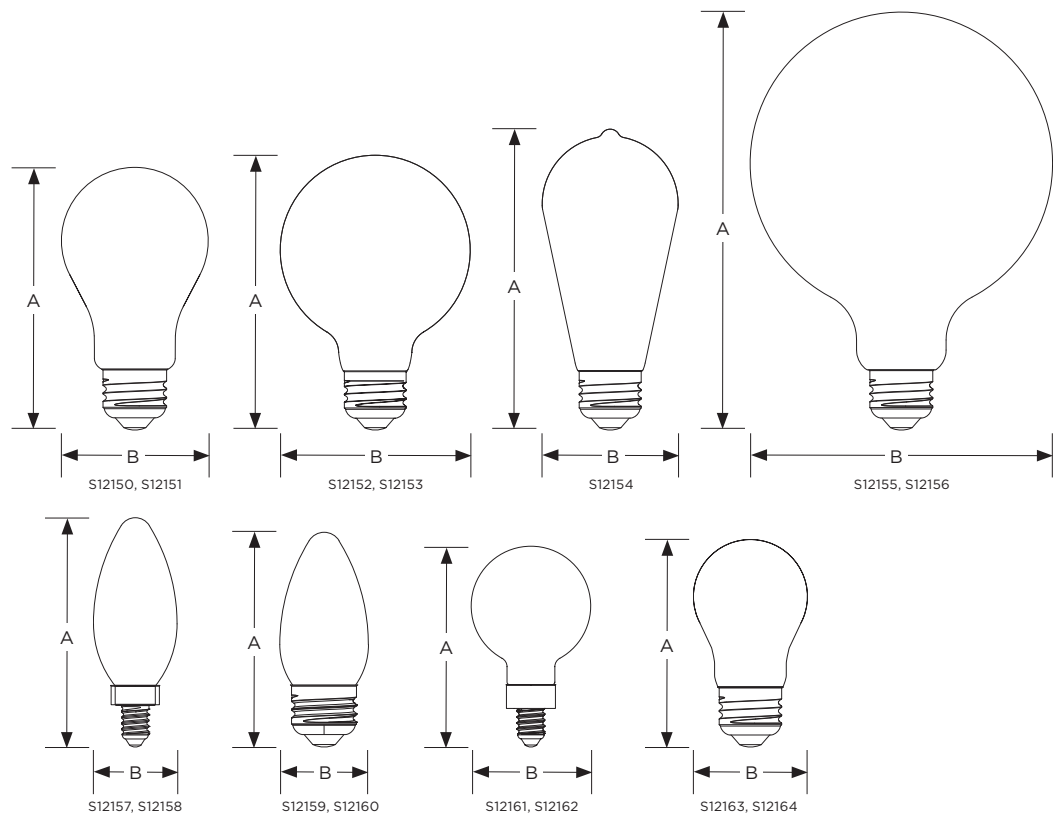


FEATURES

Warm Dimming 3000K-2000K



Medium or Candelabra Base

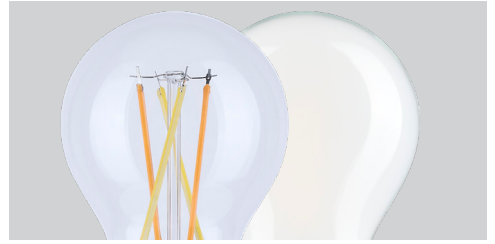

All Glass Construction

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Meets requirements of ICES-005 issue 5 class B for use in residential applications.

Fixture may not be compatible with all dimmers. See satco.com for details.

Replacement wattage shown depends on application and fixture.

Specifications are subject to change without prior notice.