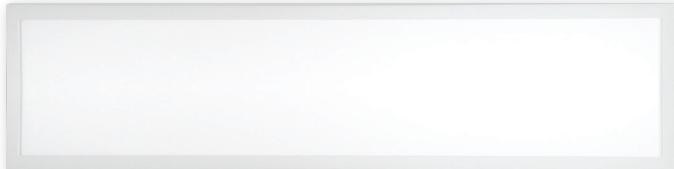



**BACKLIT LED TECHNOLOGY****FIELD SELECTABLE  
(WATTAGE AND CCT)****INTEGRATED EM MODELS  
AVAILABLE****EVEN GLARE-FREE  
ILLUMINATION****0-10V DIMMING****SUGGESTED APPLICATIONS**

Commercial  
Hospitality  
Offices  
Schools  
Retail  
Hospitals

# LED BACKLIT FLAT PANELS

## WITH AND WITHOUT EMERGENCY BATTERY BACKUP

**1' x 4'**  
20W/30W/40W**2' x 2'**  
20W/30W/40W**2' x 4'**  
30W/40W/50W

SATCO|NUVO® Backlit Panels deliver reliable performance with the flexibility to suit a wide range of applications. Available in six standard and six emergency models, these panels come in 1x4, 2x2, and 2x4 sizes, with universal voltage operation at 120-277V or 120-347V. Each fixture offers CCT selectability (3500K/4000K/5000K) to accommodate project needs. Built with a steel body and a solid die-cast aluminum trim, the panels feature seamless corners with no light leakage, while the polystyrene lens provides uniform illumination. Designed with 0-10V dimming to 10%, they are rated for damp locations with an IP20 designation. Emergency models include a 90-minute runtime with an integrated red battery backup and indicator light for added safety. DLC listed, 50,000-hour rated, and backed by a 5-year warranty, these fixtures are built for efficiency, durability, and lasting value.



## GENERAL SPECIFICATIONS

**Frequency:** 50/60Hz  
**Power Factor:** 0.9  
**THD %:** <20%  
**Dimmable:** 0-10V Dimmable Down to 10%  
**Surge Protection Rating:** 2kV  
**Efficacy:** up to 125 LPW  
**CRI:** 80+  
**CCT Selectable:** 3500K/4000K/5000K  
**Beam Angle:** 120°  
**Emergency Mode:** 8W, 1000 Lumens

**Location Rating:** Damp**IP Rating:** IP20**Ambient Operating Temperature:** -17°C (+1.4°F) to +45°C (+113°F)**Housing Material:** Steel**Housing Finish:** White**Trim Material:** Die-Cast Aluminum**Lens Material:** Polystyrene (PS)**Functional Life:** 50,000 Hours**Warranty:** 5 Years

\* EM models only

## ITEM SPECIFICATIONS / ORDER INFO



Item	Size	Range Voltage	Lumens	Wattage Selectable	Input Current	DLC ID	Pack Qty	Available Date		
<b>Standard Models</b>										
65-1661	2X2	120V-277V	2500L/3750L/5000L	20W/30W/40W	0.07-0.34A	S-2S0B17	2	In Stock		
65-1662	2X4	120V-277V	3750L/4500L/6250L	30W/40W/50W	0.10-0.42A	S-FPBCM2	2	In Stock		
65-1663	1X4	120V-277V	2500L/3750L/5000L	20W/30W/40W	0.07-0.34A	S-NBWDB3	2	1/30/26		
65-1671	2X2	120V-347V	2500L/3750L/5000L	20W/30W/40W	0.05-0.34A	S-58TP4D	2	1/30/26		
65-1672	2X4	120V-347V	3750L/4500L/6250L	30W/40W/50W	0.08-0.42A	S-42YJK8	2	1/30/26		
65-1673	1X4	120V-347V	2500L/3750L/5000L	20W/30W/40W	0.05-0.34A	S-ZT74D1	2	1/30/26		
<b>Integrated Emergency Battery Backup Models</b>										
65-1665	2X2	120V-277V	2500L/3750L/5000L	20W/30W/40W	0.07-0.34A	LiFePO4	90 Minutes	S-WGKDSN	1	1/30/26
65-1666	2X4	120V-277V	3750L/4500L/6250L	30W/40W/50W	0.10-0.42A	LiFePO4	90 Minutes	S-6PPYJO	1	1/30/26
65-1667	1X4	120V-277V	2500L/3750L/5000L	20W/30W/40W	0.07-0.34A	LiFePO4	90 Minutes	S-6MR91L	1	1/30/26
65-1675	2X2	120V-347V	2500L/3750L/5000L	20W/30W/40W	0.05-0.34A	LiFePO4	90 Minutes	S-B4MN38	1	1/30/26
65-1676	2X4	120V-347V	3750L/4500L/6250L	30W/40W/50W	0.08-0.42A	LiFePO4	90 Minutes	S-PDB3QM	1	1/30/26
65-1677	1X4	120V-347V	2500L/3750L/5000L	20W/30W/40W	0.05-0.34A	LiFePO4	90 Minutes	S-24Z8YB	1	1/30/26

## OPTIONAL ACCESSORIES (SOLD SEPARATELY)

Item	Description
<b>Compatible with 65-1661 &amp; 65-1671</b>	
65-1612	2X2 SURFACE MOUNT KIT
65-1615	2X2 FLANGE KIT
<b>Compatible with 65-1662 &amp; 65-1672</b>	
65-1611	2X4 SURFACE MOUNT KIT
65-1614	2X4 FLANGE KIT
<b>Compatible with 65-1663 &amp; 65-1673</b>	
65-1613	1X4 SURFACE MOUNT KIT
65-1616	1X4 FLANGE KIT
<b>Compatible with all Standard Models</b>	
65-1610	BACKLIT PANEL SUSPENSION KIT

**DIMENSIONS / WEIGHTS**

Item	Length (A)	Width (B)	Height (C)	Weight
65-1661	23.74"	23.74"	1.38"	4.12 Lbs.
65-1662	47.76"	23.74"	1.38"	8.03 Lbs.
65-1663	47.76"	11.93"	1.38"	4.25 Lbs.
65-1665	23.74"	23.74"	1.38"	6.50 Lbs.
65-1666	47.76"	23.74"	2.69"	10.69 Lbs.
65-1667	47.76"	11.93"	2.59"	6.39 Lbs.
65-1671	23.74"	23.74"	1.38"	4.12 Lbs.
65-1672	47.76"	23.74"	1.38"	8.03 Lbs.
65-1673	47.76"	11.93"	1.38"	4.25 Lbs.
65-1675	23.74"	23.74"	2.68"	6.50 Lbs.
65-1676	47.76"	23.74"	2.69"	10.69 Lbs.
65-1677	47.76"	11.93"	2.59"	6.39 Lbs.

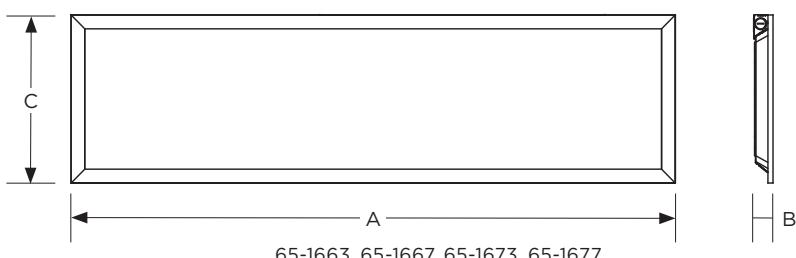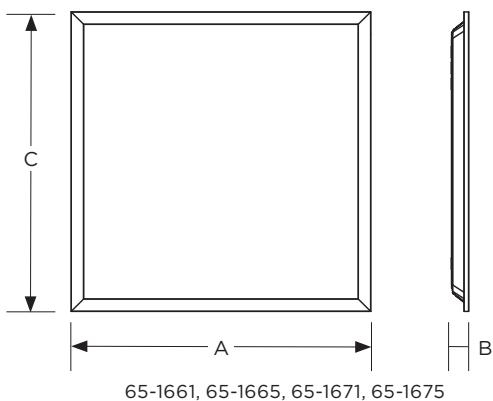
**FEATURES**


Integrated Emergency Battery Backup



Emergency Test Indicator



Wattage Selectable Switch



CCT Selectable Switch

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**WARNING:** Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Meets requirements of ICES-005 issue 5 class A for use in commercial applications.

Fixture may not be compatible with all dimmers. See [satco.com](http://satco.com) for details.

Replacement wattage shown depends on application and fixture.

Specifications are subject to change without prior notice.

Visit [satco.com/service/warranty](http://satco.com/service/warranty) for complete warranty details.