


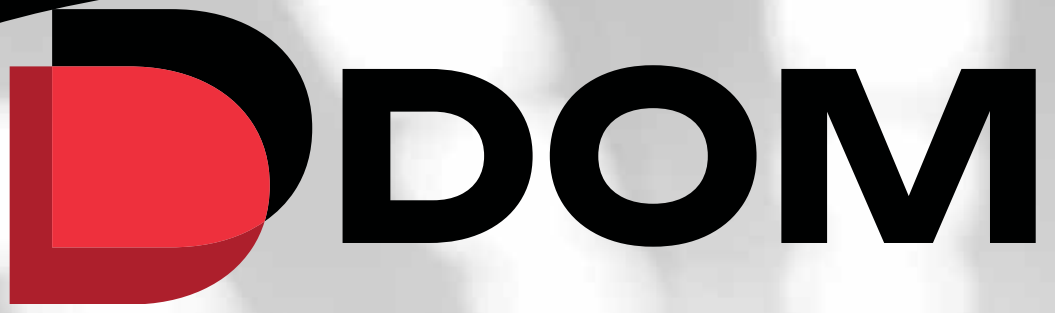

DOMINOTM

NETWORKED LIGHTING CONTROLS

CATALOG

The logo for DOM features a stylized letter 'D' on the left, composed of a red square and a black semi-circle. To its right, the letters 'DOM' are written in a bold, black, sans-serif font.

DOM

INO

THE DOMINO™ DIFFERENCE

SATCO | NUVO's Domino™ NLC is a Bluetooth mesh, hub-free wireless control solution with embedded motion and daylight sensors in many in-stock fixtures. With additional components such as external controllers, keypads, and sensors, Domino will be able to control not just SATCO | NUVO lighting but virtually any lighting fixture.

Capabilities include occupancy/vacancy, daylight harvesting, scheduling, and scene setting for both interior and exterior fixtures to advanced IoT analytics platforms that can track occupancy status for space utilization, wayfinding, and even critical asset tracking.

Quick control systems make setting up networked lighting easy and is the chosen solution for contractors, facility managers and owners to incorporate a wireless lighting control system.

Energy Efficient

Meets ALL energy code and DLC requirements to qualify for maximum available energy incentives

Empowered

Intuitive app with user prompts to guide setup and use

Embedded Wireless Technology

Fixtures with built-in Bluetooth Mesh sensors simplify installation and saves time

Effective

Multifunction expanded configurations solve virtually any control application

Encrypted

128-bit AES signal encryption ensures maximum system security

Expandable

Unlimited number of zones for any size facility with project-level coordination and enhanced IoT analytics for space utilization, way finding, and critical asset tracking capabilities

Enhanced

By world-class SATCO Service and Support



CONTROL ALL SPACES

DOMINO™ networked wireless control systems are engineered for the full spectrum of the modern landscape. From the sterile precision of Healthcare and Assisted Living to the high-traffic energy of Hospitality and Retail.

Whether it's the expansive scale of Education Settings, Industrial Warehouses and Parking Facilities or the intimate atmosphere of Restaurants and Lounges, we provide tailored performance for every square foot.



FEATURES & CAPABILITIES

Meet all energy code requirements, including:

- Occupancy/Vacancy Sensing to shut off lighting in unoccupied spaces
- Daylight harvesting—dimming light near window spaces and under skylights based on ambient natural light levels
- Manual controls—keypads that can switch different loads of lights on and off, dim individual or groups of lights, set scenes, and control CCT if desired
- Scheduling—set off times for interior or exterior spaces based on hours of operation
- Control receptacles for automatic shutoff (to meet new energy code requirements)
- Exterior photosensor and motion sensing control for site lighting
- Addressable control of individual fixtures
- Energy usage monitoring and reporting
- Battery backed-up real-time clock for power outages

Expanded capabilities:

- Circadian rhythm programming for CCT controllable fixtures
- Domino™ app provides a confirming QR code showing system is programmed
- Integration with external (HVAC/BMS/EMS) systems for setback control or energy monitoring
- Enable integration with enterprise-wide software for advanced IoT analytics such as space utilization reporting, wayfinding, and critical asset tracking



HOW DOES IT WORK?

Domino™ offers a complete array of control modules for all load types to control virtually any fixture.

- 2.4 GHz Bluetooth Mesh hubless system topography with encrypted signals
- Hubless technology eliminates a potential point of failure and also enables enhanced addressable control of individual fixtures
- Enhanced app design includes prompts for system updates and helpful project management tools (Domino Projects for more than 100 components)—helps you keep all elements up to date on firmware
- Emergency zone controllers to meet UL 924 requirements
- No Wi-Fi needed for initial setup
- Embedded motion and daylight sensors in most luminaire types for interior and exterior applications
- Expert CLSD product specialists available for service and support
- Long-life battery-operated keypads for true wireless operation

SIMPLE SET UP

POWERFUL EXPANSION CAPABILITIES



1 INSTALL CONNECTED LIGHTING



2 DOWNLOAD THE APP



3 CONNECT TO COMPONENTS



4 CONFIGURE SETTINGS



DOMINO APP

Available in iOS and Android





DOMINO APP

Available in iOS and Android

LIMITLESS CONFIGURATIONS

Each Domino™ luminaire is individually addressable, which allows for a limitless combination of settings and features to meet any application requirement.

SET UP ZONES

Create zones (areas) with up to 100 nodes for maximum efficiency in configuration and control.

GROUPS

Easily group and set up control strategies for fixtures in subsets with complete flexibility for changes. Integrate groups within zones for easy scaling with no limit to the number of groups that can exist.

SCENES

Create preset lighting scenes within the Domino app to apply specific brightness and color temperatures stored in the Domino network. Scenes can be controlled with the app or Domino-connected wall switches.

OCCUPANCY/VACANCY

PIR and dual-tech motion sensors have full adjustability of both reduced light level and time-off control for all applications. Settings can easily be adjusted using the Domino app.

DAYLIGHT HARVESTING

Advanced technology enables both adjustable fade rate and dead band settings to make automatic daylight control more comfortable for building occupants.

TASK/TRIM TUNING

Light levels can be adjusted to match predetermined visual requirements of a given space. Schedule timed shutoff to meet energy code requirements and save energy.

SET SCHEDULES

Set up your lighting system according to your schedule. Set timed shutoff to meet energy code requirements and save energy.



Download on the
App Store




Get it on
Google Play

APP SCREENS




LIGHTS

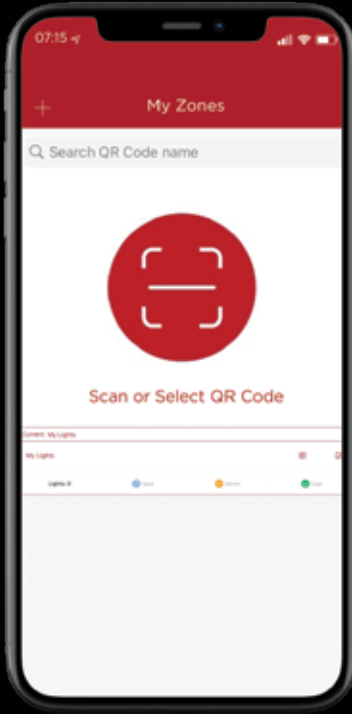


ZONES




GROUPS

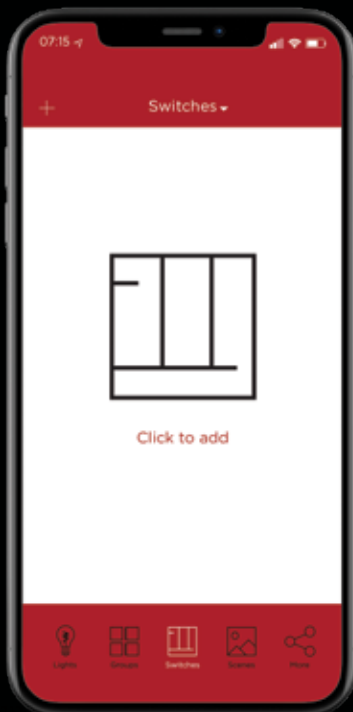

SWITCHES

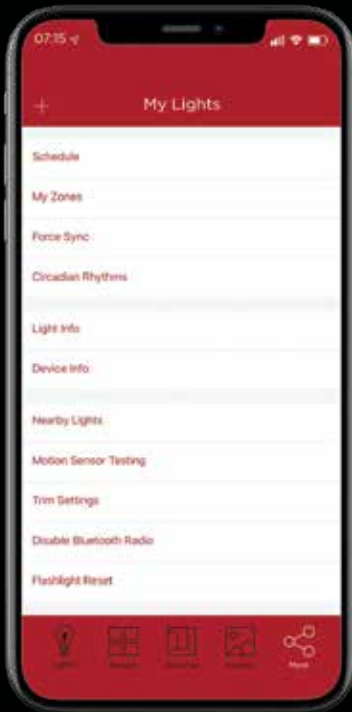

SETTING

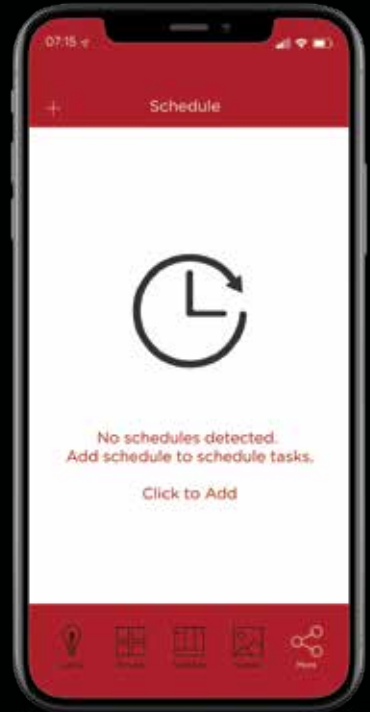


SCHEDULING



FLAT PANEL DOOR KIT SERIES



WIRELESS NETWORKED CONTROLLED BACKLIT FLAT PANELS WITH PIR & DAYLIGHT HARVESTING & COLOR TUNING SENSOR

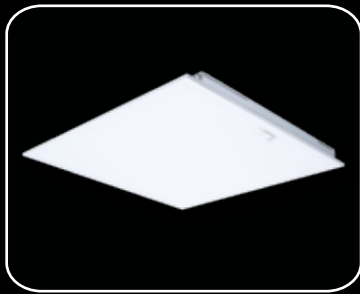

68-101

FEATURES

- Integrated low profile sensor
- App controlled tunable white (CCT) Control
- Bluetooth® mesh network for wireless communication
- Sensor supports mounting heights up to 15 ft
- Integrated EM Versions Available
- Low optical flicker

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	SIZE	WATTAGE	LUMENS	INPUT CURRENT	DLC ID	UPC
68-101	2x2"	40W	5000L	0.33-0.12A	S-2799LR	045923683442
68-102	2x4"	50W	6250L	0.42-0.14A	S-C11RZR	045923683459
68-103	1x4"	40W	5000L	0.33-0.11A	S-DSDDJV	045923683466
EMERGENCY BATTERY BACKUP						
68-105	2x2"	40W	5000L	0.33-0.12A	S-KSFKPF	045923683473
68-106	2x4"	50W	6250L	0.42-0.14A	S-8ZMRJ1	045923683480
68-107	1x4"	40W	5000L	0.33-0.12A	S-ZHZFMK	045923683497



TROFFER DOOR KIT SERIES



WIRELESS NETWORKED CONTROLLED SINGLE BASKET TROFFER WITH PIR & DAYLIGHT HARVESTING SENSOR



68-111

FEATURES

- Integrated low profile sensor
- App controlled tunable white (CCT) control
- Bluetooth® mesh network for wireless communication
- Sensor supports mounting heights up to 15 ft
- Integrated EM Versions Available
- Low optical flicker

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	SIZE	WATTAGE	LUMENS	INPUT CURRENT	DLC ID	UPC
68-111	2x2"	40W	5000L	0.33-0.12A	S-CSPX91	045923683572
68-112	2x4"	50W	6250L	0.42-0.14A	S-NVDHZ7	045923683589
68-113	1x4"	40W	5000L	0.33-0.11A	S-L19G62	045923683596

EMERGENCY BATTERY BACKUP

68-115	2x2"	40W	5000L	0.33-0.12A	S-9WX6BH	045923683602
68-116	2x4"	50W	6250L	0.42-0.14A	S-4QBLPL	045923683619
68-117	1x4"	40W	5000L	0.33-0.12A	S-9J3N5J	045923683626





FLAT PANEL RETROFIT DOOR KIT SERIES



WIRELESS NETWORKED CONTROLLED BACKLIT FLAT PANELS WITH PIR & DAYLIGHT HARVESTING & COLOR TUNING SENSOR



68-108

FEATURES

- Integrated low profile sensor
- App controlled tunable white (CCT) Control
- Bluetooth® mesh network for wireless communication
- Sensor supports mounting heights up to 15 ft
- Integrated EM Versions Available
- Low optical flicker

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO


ITEM	SIZE	WATTAGE	LUMENS	INPUT CURRENT	DLC ID	UPC
68-108	22.76x21.09"	40W	2700L-5400L	0.367A	S-KGXQDP	045923413544
68-109	46.75x21.09"	50W	4050L-6750L	0.458A	S-XBDB38	045923413568
68-110	46.75x8.57"	40W	2700L-5400L	0.367A	S-9BFBP0	045923413551



TROFFER RETROFIT DOOR KIT SERIES



WIRELESS NETWORKED CONTROLLED SINGLE BASKET TROFFER WITH PIR & DAYLIGHT HARVESTING SENSOR

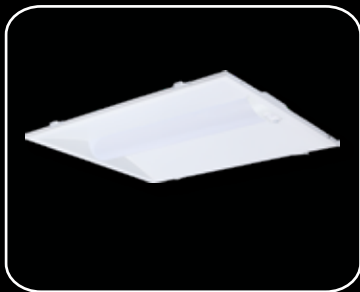

68-118

FEATURES

- Integrated low profile sensor
- App controlled tunable white (CCT) control
- Bluetooth® mesh network for wireless communication
- Sensor supports mounting heights up to 15 ft
- Integrated EM Versions Available
- Low optical flicker

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	SIZE	WATTAGE	LUMENS	INPUT CURRENT	DLC ID	UPC
68-118	22.76x20.47"	40W	2400L-4800L	0.36A	S-PKZN95	045923413575
68-119	46.75x20.47"	50W	3600L-6000L	0.458A	S-7D40DJ	045923413599
68-120	46.75x8.50"	40W	2400L-4800L	0.367A	S-RJBGDY	045923413582





LINEAR HIGH BAY SERIES



WIRELESS NETWORKED CONTROLLED LINEAR HIGH BAY WITH PIR & DAYLIGHT HARVESTING SENSOR



68-131

FEATURES

- DOMINO™ High Bay Sensor included
- Interchangeable optical lenses
- 41" Suspension kit included
- Flicker free driver
- Bluetooth® mesh network for wireless communication

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	WATTS	LUMENS	INPUT CURRENT	DLC ID	UPC
68-131	155W	20321/21714/21502	1.29-0.45A	S-MYVCK9	045923683503
68-132	320W	42411/45598/44422	2.67-0.92A	S-WXTDIX	045923683510



ROUND HIGH BAY SERIES



WIRELESS NETWORKED CONTROLLED UFO HIGH BAY WITH PIR & DAYLIGHT HARVESTING SENSOR



68-141

FEATURES

- DOMINO™ High Bay Sensor included
- Beam Selectable 60°/80°/100°
- Integrated 6' supply & low voltage whips
- Bluetooth® mesh network for wireless communication
- Sensor supports mounting heights up to 40 ft

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	WATTS	LUMENS	INPUT CURRENT	DLC ID	UPC
68-141	120W	16416/18149	1.00-0.35A	S-M4B3ZD	045923683633
68-142	240W	33400/37226	2.00-0.69A	S-N29VJ5	045923683640





LINEAR STRIP SERIES



WIRELESS NETWORKED CONTROLLED LINEAR STRIP WITH PIR & DAYLIGHT HARVESTING SENSOR



68-121

FEATURES

- Integrated low profile sensor
- App Controlled tunable white (CCT) Control
- Bluetooth® mesh network for wireless communication
- Sensor supports mounting heights up to 15 ft
- Integrated EM Versions Available
- Low optical flicker

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	SIZE	WATTS	LUMENS	INPUT CURRENT	DLC ID	UPC
68-121	2'	25W	3250L	0.21-0.07A	S-H3V00S;S-8VDPLQ	045923683527
68-122	4'	50W	6500L	0.42-0.14A	S-12YKQD	045923683524
68-123	8'	50W	6500L	0.42-0.14A	S-2WHQT3	045923683541
EMERGENCY BATTERY BACKUP						
68-125	2'	25W	3250L	0.21-0.07A	S-H3V00S;S-8VDPLQ	045923683558
68-126	4'	50W	6500L	0.42-0.14A	S-17YKQD	045923683565



VAPOR PROOF LINEAR SERIES



WIRELESS NETWORKED CONTROLLED VAPOR PROOF LINEAR FIXTURES WITH MICROWAVE OCCUPANCY SENSOR



68-195

FEATURES

- Integrated microwave sensor
- Includes stainless steel mounting hardware and clips
- IK008 Vandal resistant
- Integrated EM versions available
- Sensor supports mounting heights from 8-20 ft
- Bluetooth® mesh network for wireless communication

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	SIZE	WATTAGE	LUMENS	INPUT CURRENT @120V/277V/347V	BUG RATING	DLC ID	UPC
68-181	2'	5W	3250	0.21-0.07A	B1-U3-G2	S-QMC6C3	045923683268
68-182	4'	60W	7800	0.50-0.17A	B1-U3-G2	S-3S9KQK	045923683275
68-183	8'	72W	9360	0.60-0.21A	B3-U3-G3	S-JQ7ZF4	045923683282
EMERGENCY BATTERY BACKUP							
68-185	2'	25W	3250	0.21-0.07A	B1-U3-G2	S-QMC6C3	045923683299
68-186	4'	60W	7800	0.50-0.17A	B1-U3-G2	S-3S9KQK	045923683305
68-187	8'	72W	9360	0.60-0.21A	B3-U3-G3	S-JQ7ZF4	045923683312





CANOPY SERIES



WIRELESS NETWORKED CONTROLLED ROUND CANOPY WITH PIR & DAYLIGHT HARVESTING SENSOR



68-151/68-152

FEATURES

- DOMINO™ LED Canopy Sensor included
- CCT Selectable control
- Bluetooth® mesh network for wireless communication
- Sensor supports mounting heights up to 40 ft
- Die-Case Aluminum Body
- IK08 Impact Rated

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	HOUSING FINISH	WATTAGE	LUMENS	INPUT CURRENT @ 120V/277V/327V	DLC ID	UPC
68-151	White	55W	7733/8002/7920	0.46-0.16A	S-KRB2LB	045923683367
68-152	Bronze	55W	7733/8002/7920	0.46-0.16A	S-KRB2LB	045923683374
68-153	White	100W	14208/15114/14792	0.83-0.29A	S-NORC3N	045923683381
68-154	Bronze	100W	14208/15114/14792	0.83-0.29A	S-NORC3N	045923683398



CANOPY SERIES



WIRELESS NETWORKED CONTROLLED WIDE BEAM CANOPY WITH PIR & DAYLIGHT HARVESTING SENSOR



68-161/68-163

FEATURES

- DOMINO™ LED Canopy Sensor Included
- Wide beam angle for greater light distribution
- Anti-glare parking garage optics
- IK10 impact rated
- Bluetooth® mesh network for wireless communication

Easy Commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	HOUSING FINISH	WATTAGE	LUMENS	INPUT CURRENT @ 120V/277V/327V	BUG RATING	DLC ID	UPC
68-161	White	45W	6143/6778/6677	0.38-0.13A	B2-U3-G3	S-2G6G9R	045923683404
68-162	White	90W	10952/12017/11841	0.75-0.26A	B3-U4-G5	S-4CL2MO	045923683411
68-163	Bronze	45W	6143/6778/6677	0.38-0.13A	B2-U3-G3	S-2G6G9R	045923683428
68-164	Bronze	90W	10952/12017/11841	0.75-0.26A	B3-U4-G5	S-4CL2MO	045923683435





CANOPY SERIES



WIRELESS NETWORKED CONTROLLED SQUARE CANOPY WITH MICROWAVE OCCUPANCY SENSOR



68-171/68-172

FEATURES

- Integrated Microwave Occupancy Sensor
- Hinged universal mounting bracket
- Ceiling or pendant mounting
- IK08 vandal resistant
- Bluetooth® mesh network for wireless communication
- Sensor supports mounting heights from 8-20 ft

Easy commissioning with DOMINO™ App



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	SIZE	WATTAGE	LUMENS	INPUT CURRENT @ 120V/277V/327V	SURGE PROTECTION RATING	BUG RATING	DLC ID	UPC
68-171	8.5"	40W	5400	0.38-0.13A	6kV	B2-U3_G2	S-9FP2MV	045923683343
68-172	10"	70W	8400	0.58-0.20A	4kV	B3-U3-G3	S-HJBT3F	045923683350



AREA LIGHT SERIES



WIRELESS NETWORKED CONTROLLED LED AREA LIGHTS WITH PIR & DAYLIGHT HARVESTING SENSOR



68-201/68-202

FEATURES

- DOMINO™ Area Light Sensor included
- CCT Selectable control
- Type III light distribution
- UV stabilized powder coated finish
- Sensor supports mounting heights up to 40 ft
- Bluetooth® mesh network for wireless communication

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	WATTAGE	LUMENS	INPUT CURRENT @ 120V/277V/327V	BUG RATING	DLC ID	UPC
68-201	300W	39000	2.50-0.87A	B4-U3-G4	S-DJKR89	045923683336
68-202	150W	19500	1.25-0.43A	B3-U3-G3	S-H7FCP4	045923683329



DOMINO™

WALL PACK SERIES



WIRELESS NETWORKED CONTROLLED WALL PACK



68-191

FEATURES

- Integrated Domino Sensorless Controller Node
- CCT Selectable control
- Durable Borosilicate glass with die-cast aluminum body
- Bluetooth® mesh network for wireless communication

Easy commissioning with DOMNIO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	WATTS	LUMENS	INPUT CURRENT	BUG RATING	DLC ID	UPC
68-191	60W	8548/8740/8535	0.50-0.17A	B1-U4-G5	ETA 8/25	045923683675
68-192	120W	16840/17456/17554	1.00-0.35A	B1-U4-G5	ETA 8/25	045923683664



FULL CUT OFF WALL PACK SERIES



WIRELESS NETWORKED CONTROLLED FULL CUT OFF WALL PACK WITH PIR & DAYLIGHT HARVESTING SENSOR



68-195

FEATURES

- Integrated low profile sensor
- CCT Selectable control
- Bluetooth® mesh network for wireless communication
- Sensor supports mounting heights up to 40 ft
- Die-Cast Aluminum Body

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	WATTS	LUMENS	INPUT CURRENT	DLC ID	UPC
68-195	80W	10608/11315/10623	0.67-0.23A	S-QW9GJ6	045923683671
68-196	120W	16928/17789/17060	1.00-0.35A	S-VGJPYM	045923683688





DOWNLIGHTS



WIRELESS NETWORKED CONTROLLED COMMERCIAL DOWNLIGHTS WITH SENSORLESS CONTROLLER NODE



68-211

FEATURES

- Integrated DOMINO™ Sensorless Controller Node
- App controlled tunable white (CCT) Control
- Bluetooth® mesh network for wireless communication
- Attached Remote Junction & Node Box
- 120-347V Input Voltage Range

Easy commissioning with DOMINO™ app




SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	SIZE	WATTAGE	MAX REPLACEMENT WATTAGE	LUMENS	BEAM ANGLE	EFFICACY	UPC
68-211	4"	13.2W	75W	1200L	85°	UP TO 98 LPW	045923402463
68-212	6"	18.5W	100W	2200L	105°	UP TO 98 LPW	045923402470
68-213	8"	25.5W	125W	3200L	100°	UP TO 98 LPW	045923402487

ADDITIONAL TRIM COLORS



CONTROLLERS



6A Wireless Zone Controller



87-201

FEATURES

- Compatible with 0-10V dimming system
- 120-347V input with up to 6A switching capacity
- Supports output loads up to 576W(120V)/1330W (277V)/5552W/(347V)
- Bluetooth® mesh network for wireless communication
- Direct control- no hub or gateway needed

Easy commissioning with DOMINO™ app



ITEM SPECIFICATIONS / ORDER INFO

ITEM	DESCRIPTION	UPC
87-201	6A Wireless Zone Controller	045923872013



SCAN FOR SPEC SHEET



DOMINO™

CONTROLLERS



PHASE DIMMING WIRELESS CONTROLLER WITH FORWARD & REVERSE PHASE CONTROL



87-204

FEATURES

- Bluetooth® mesh network for wireless communication
- Direct control- no hub or gateway needed
- Forward and reverse phase dimming with relay switching
- Dimming capability down to 1% brightness
- 120V input with up to 1.5A switching capacity
- Supports output loads up to 180W (120V) @ 144W

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	DESCRIPTION	UPC
87-204	Phase Dimming Wireless Controller	045923872044



CONTROLLERS



UL924 WIRELESS EMERGENCY LIGHTING BEACON



87-203

FEATURES

- Complies with UL924 emergency lighting standards
- Bluetooth® mesh network for wireless communication
- Supports remote test button or fire alarm interface
- One controller supports a full emergency zone

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET




ITEM SPECIFICATIONS / ORDER INFO

ITEM	DESCRIPTION	UPC
87-203	UL924 Wireless Emergency Lighting Beacon	045923872037



DOMINO™

CONTROLLERS

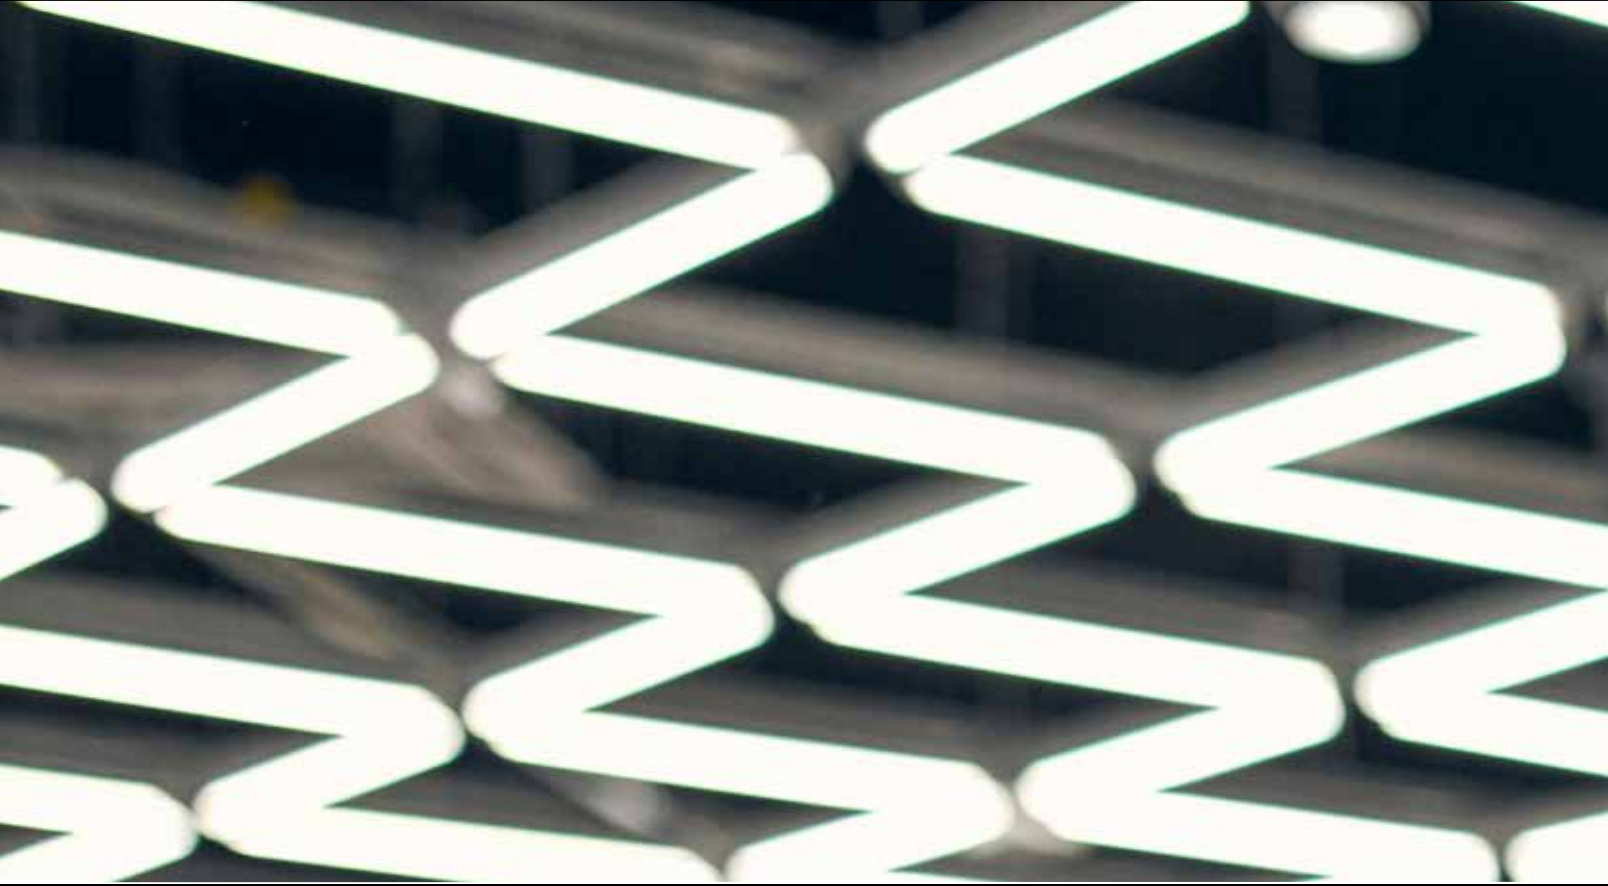

20A Wireless Zone Controller



FEATURES

- 120/277V input with up to 20A switching capacity
- Supports output loads up to 1,920W (120V) 4,432W (277V)
- Plenum-rated housing (UL2043) for in-ceiling installations
- Compatible with 0-10V dimming fixture
- Bluetooth® mesh network for wireless communication
- Direct control, no hub or gateway needed

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	DESCRIPTION	UPC
87-202	20A Wireless Zone Controller	045923872020



SENSORS



DUAL TECH WIRELESS CEILING SENSOR WITH MOTION DAYLIGHT HARVESTING | BUILT IN 0-10V & CCT CONTROLLER



87-305

FEATURES

- Dual-tech motion sensing for minor motion & major motion to 2,000 SF
- Photosensor for daylight harvesting
- Built-in 6A relay and 0-10V dimming control
- Built-in CCT control for compatible tunable drivers
- Up to 14 ft mounting height
- Bluetooth® mesh network for wireless communication
- Direct control- no hub or gateway needed

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	DESCRIPTION	UPC
87-305	Dual Tech Wireless Ceiling Sensor	045923873058



DOMINO™

SENSORS



BATTERY POWERED WIRELESS CEILING MOUNT SENSOR WITH INTEGRATED PIR & DAYLIGHT HARVESTING



87-306


FEATURES

- Battery Powered for remote or retrofit applications
- Up to 10-year battery life with included CR123A cell
- Bluetooth® mesh network for wireless communication
- Direct control- no hub or gateway needed
- Built-in analog PIR motion and daylight harvesting sensor

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	DESCRIPTION	UPC
87-306	Battery Powered Ceiling Mount Sensor	045923873065



SENSORS



EXTERNAL MOUNT WIRELESS HIGH BAY SENSOR WITH INTEGRATED PIR & DAYLIGHT HARVESTING



87-401

FEATURES

- Bolt-on external installation to standard 1/2" knockout
- Bluetooth® mesh network for wireless communication
- Direct control- no hub or gateway needed
- Built-in analog PIR motion and daylight harvesting sensor
- Supports mounting heights from 20-40 ft

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	DESCRIPTION	UPC
87-401	External Mount Wireless High Bay Sensor	045923874017





KEYPADS



3 BUTTON WIRELESS KEYPAD LINE VOLTAGE CONTROL FOR NETWORKED LIGHTING



87-504

FEATURES

- 3 buttons for on/off and raise/lower dimming functionality
- Screwless faceplate included
- Bluetooth® mesh network for wireless communication
- Direct control- no hub or gateway needed
- Operates on 120-277V line voltage

Easy commissioning with DOMINO™ app



ITEM SPECIFICATIONS / ORDER INFO

ITEM	DESCRIPTION	UPC
87-504	3 Button Wireless Keypad	045923875045



SCAN FOR SPEC SHEET



KEYPADS



3 BUTTON WIRELESS KEYPAD BATTERY POWERED CONTROL FOR NETWORKED LIGHTING



87-501

FEATURES

- 3 buttons for on/off and raise/lower dimming functionality
- Screwless faceplate included
- Bluetooth® mesh network for wireless communication
- Direct control- no hub or gateway needed
- Can be wall mounted or used as a remote control
- Powered by a single CR2032 battery
- 5-8 year battery life with normal use

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	DESCRIPTION	UPC
87-501	3 Button Wireless Keypad	045923875014





KEYPADS



7 BUTTON WIRELESS KEYPAD LINE VOLTAGE CONTROL FOR NETWORKED LIGHTING



87-505

FEATURES

- 7 programmable buttons for controlling groups, scenes or individual fixtures
- Screwless faceplate included
- Bluetooth® mesh network for wireless communication
- Direct control- no hub or gateway needed
- Operates on 120-277V line voltage

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	DESCRIPTION	UPC
87-505	7 Button Wireless Keypad	045923875052



KEYPADS



5 BUTTON WIRELESS KEYPAD BATTERY POWERED CONTROL FOR NETWORKED LIGHTING



87-502

FEATURES

- 5 programmable buttons for controlling groups, scenes or individual fixtures
- Screwless faceplate included
- Bluetooth® mesh network for wireless communication
- Direct control- no hub or gateway needed
- Can be wall mounted or used as a remote control
- Powered by a single CR2032 battery
- 5-8 year battery life with normal use

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	DESCRIPTION	UPC
87-502	5 Button Wireless Keypad	045923875021





RECEPTACLE



SPLIT CONTROLLED 20A WIRELESS RECEPTACLE WITH PERMANENT POWER AND CONTROLLED RECEPTACLE



87-602

FEATURES

- Provides a permanent powered and DOMINO controlled outlet
- LED status indicator and Bluetooth® reset button
- Installs in a standard single gang box
- Bluetooth® mesh network for wireless communication
- Direct control- no hub or gateway needed

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	DESCRIPTION	UPC
87-602	20A Wireless Receptacle	045923876028



ACCESSORIES



TIME SCHEDULE BACKUP MODULE USB POWERED WITH BATTERY BACKUP



87-701


FEATURES

- Powered by standard 5V USB-A port
- Includes CR2032 battery to keep time during a power outage
- 8-10 year battery life
- Bluetooth® mesh network for wireless communication
- Direct control- no hub or gateway needed

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	DESCRIPTION	UPC
87-701	Time Schedule Backup Module	045923877018





ACCESSORIES



LONG RANGE SCHEDULE SYNCHRONIZATION MODULE USB POWERED BATTERY BACKUP WITH EXTENDED RANGE ANTENNA



87-702

FEATURES

- Powered by standard 5V USB-A port
- Includes CR2032 battery to keep time during a power outage
- 8-10 year battery life
- Extended antenna range up to 860 ft
- Bluetooth® mesh network for wireless communication
- Direct control, no hub or gateway needed

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO

ITEM	DESCRIPTION	UPC
87-702	Long Range Time Clock Synchronization Module	045923877025



ACCESSORIES



LONG RANGE SIGNAL BOOSTER WITH SYNCRONIZATION MODULE AND PROTECTED ENCLOSURE



87-703

FEATURES

- 120/277/347V Input
- Extended antenna range up to 1,640 ft
- Mounting hardware and accessories included
- Bluetooth® mesh network for wireless communication
- Direct control- no hub or gateway needed

Easy commissioning with DOMINO™ app



SCAN FOR SPEC SHEET



ITEM SPECIFICATIONS / ORDER INFO


ITEM	DESCRIPTION	UPC
87-703	Long Range Signal Booster	045923877032





DOMINO APP

Available in iOS and Android




sensors




lights



keypad




zone controller




receptacle




SIMPLE SETUP

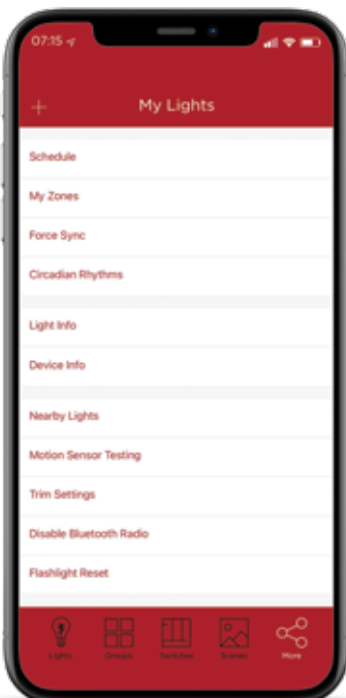

1 INSTALL CONNECTED LIGHTING




2 DOWNLOAD THE APP



3 CONNECT TO COMPONENTS



4 CREATE SETTINGS



KEY BENEFITS

Code-Compliant & Incentive-Ready: Meets all energy code and DLC requirements to qualify for maximum energy incentives.

Pre-Installed Sensors: Fixtures come with integrated sensors to simplify ordering and speed up installation.

In-Stock Availability: Readily available to reduce lead times and keep projects on schedule.

User-Friendly App: Free, intuitive app with guided prompts for easy setup and operation.

Universal Control Modules: Compatible with virtually any light fixture for maximum flexibility.

No Hub Required: Built on Bluetooth mesh — unlike many competitors, no hub is needed, eliminating a costly component and a potential point of failure.

Indoor & Outdoor Use: Suitable for both interior and exterior applications within the same system.

Secure Communication: 128-bit AES signal encryption ensures robust data security.

Wi-Fi-Free Commissioning: No Wi-Fi required for basic startup and commissioning.

UL 924 Beacon: Eliminates the need for multiple emergency bypass relays on many jobs.

Scalable & Future-Ready: Expandable beyond basic functions like occupancy sensing, daylight harvesting, scheduling, and scene setting — supports advanced IoT analytics for space utilization, way-finding, and critical asset tracking.



FAQ

Can we just attach Domino sensors into anyone's fixtures?

Typically not – the 87-401 is an exception as it is a “Bolt-on” Domino sensor and control node which can switch and dim a connected 0-10V dimmable fixture, but otherwise fixtures need to be Domino capable in order to use our sensors.

Is Domino able to control other manufacturers lighting fixtures?

Yes, Domino has wirelessly connected control modules that can dim all standard 0-10 V and phase dimmed luminaires, from most any manufacturer from 120-347V.

Is Domino compatible with other lighting control systems?

No, Domino is supported as a singular closed system for lighting controls and does not work with other manufacturer's control systems.

Does Domino work with Starfish?

No Domino is a completely separate commercial based lighting control system that works independently from Starfish.

Is Domino a good choice for residential lighting control applications?

No, Domino is primarily a commercial grade lighting control system designed to meet all energy code requirements. (Use Starfish for residential applications)

Why do we need commissioning?

Domino control components designed to provide a working system solution MUST be commissioned / programmed in order to work and function as intended. Domino components that are not commissioned properly WILL NOT WORK, so commissioning is required.

Does Domino need a WiFi connection to work?

No, Domino can be completely commissioned on a local level with no WiFi or cloud connection as the communications protocol is Bluetooth Mesh (another 2,4 GHz frequency)

How much does Domino cost – are we competitive?

Yes, we are very competitive with all major lighting control solutions in the market. Our wireless system greatly reduces labor install costs and reduces installation materials required. Our luminaire program with embedded sensors simplifies the fixture install process and requires no additional labor to prepare the fixture connection to the control network. Additionally, no other system components such as hubs/gateways are required to enable system functionality.

What are our strategic competitive advantages?

We supply Domino fixtures with embedded sensors as one complete component vs most of our competitors who supply “sensor-ready” fixtures which I like to refer to as “fixtures with holes in them”. This simplifies the process greatly in terms of ordering and faster delivery. To see the full list of our competitive advantages see the Domino Sales PPT.





DOMINO.SATCO.COM

To learn more about DOMINO, visit WWW.DOMINO.SATCO.COM or contact 1-800-437-2826



Like us on Facebook



Connect with us on LinkedIn



Follow us on Instagram

National Toll-Free: 1.800.43.SATCO (1.800.437.2826)

Corporate Offices &

Distribution Center: NEW YORK 110 Heartland Blvd., Brentwood, NY 11717 | 800.437.2826 | 631.243.2022 | Fax 631.243.2027

Distribution Centers:

FLORIDA 1694 NW 215th St. Miami Gardens, FL 33056 | Tel. 305.624.2044 FAX 305.623.0286

CALIFORNIA 31288 San Benito St. Hayward, CA 94544 | Tel. 510.487.4822 FAX 510.487.8955

WASHINGTON 4710 116th St. S.W., Mukilteo, WA 98275 | Tel. 425.789.3300 FAX 425.789.3310

TEXAS 2000 Valwood Parkway, Farmers Branch, TX 75234 | Tel. 972.247.2437 FAX 972.247.5408

PUERTO RICO Campeche St. 23, Julio N. Matos Industrial Park, Carolina, PR 00984 | Tel. 787.757.3510 FAX 787.757.3540

Product specifications and availability are subject to change without notice.

Please visit us online at www.satco.com for our full product line and ordering details, or consult factory for additional information