



BEAM SELECTABLE:
60° / 90° / 110°

DLC PREMIUM LISTED

**MULTIPLE WATTAGE
PACKAGES AVAILABLE**

**3 SELECTABLE CCT:
3000K/4000K/5000K**

**INTEGRATED BY-PASSABLE
PHOTOCELL**

SUGGESTED APPLICATIONS

Commercial, Warehouses,
Walkways, Wall Wash,
Parking Lots

LED WALL PACKS

BEAM SELECTABLE | FIELD SELECTABLE



The SATCO|NUVO LED Wall Packs are designed for precise, high-output perimeter and site lighting in commercial and industrial environments. Beam-selectable optics offer 60°, 90°, or 110° distributions, allowing light to be directed exactly where it's needed for optimal coverage and reduced spill. Selectable wattage from 29W to 120W and selectable CCTs of 3000K, 4000K, and 5000K deliver lumen outputs ranging from 4,225 to 18,221 lumens. Built with a durable die-cast aluminum housing, borosilicate glass lens, and an integrated by-passable photocell, these fixtures operate on a universal 120–347V input. IP65 and IK08 rated, wet-location suitable, DLC 6.0 Listed, supporting evolving efficiency standards, and 0–10V dimmable, they offer a 50,000-hour rated life and are backed by a 5-year warranty—ideal for building perimeters, loading areas, and exterior commercial spaces.



120-
347V

0-10V
DIMMING

WET
LOCATION

IP
65

IK
08

6KV
SURGE
PROTECTION

DLC
LISTED
PREMIUM

50,000
HOURS

5YEAR
WARRANTY



GENERAL SPECIFICATIONS

Input Voltage: 120V-347V
Frequency: 50/60Hz
Power Factor: >0.9
THD %: <20%
Dimming: 0-10V Dimmable
Surge Protection Rating: 6kV
CRI: 80
CCT Selectable: 3000K/4000K/5000K
Beam Selectable: 60°/90°/110°

Location Rating : Wet
IP Rating : IP65
IK Rating : IK08
Ambient Operating Temperature: -40°C (-40°F) to +50°C (+122°F)
Housing Material: Die-Cast Aluminum
Lens Material: Borosilicate Glass
Finish: Bronze
Functional Life: 50,000 Hours
Warranty: 5 Years



ITEM SPECIFICATIONS / ORDER INFO


| Item | Lumens | Wattage Selectable | Input Current | BUG Rating | Efficacy | DLC ID |
|---------|-------------|--------------------|--------------------------------|------------|---------------|----------|
| 65-1500 | 4225-9193 | 60W/40W/29W | 0.50-0.17/0.33-0.12/0.24-0.11A | B2-U3-G5 | up to 153 LPW | S-S5WGVC |
| 65-1501 | 11858-18221 | 120W/100W/80W | 1.00-0.35/0.83-0.29/0.67-0.23A | B2-U5-G5 | up to 151 LPW | S-LRSM9Q |

OPTIONAL ACCESSORIES (SOLD SEPARATELY)

| Item | Description | Finish | Image |
|---|--------------------------------------|--------|--|
| ASSOCIATED WITH BOTH SKUS (65-1500 & 65-1501) | | | |
| 65-1502 | Protective Steel Cage; Silver Finish | Silver |  |
| 65-1503 | Cutoff Shield; Bronze Finish | Bronze |  |

DIMENSIONS / WEIGHTS

| Item | Length (A) | Depth (B) | Height (C) | Weight |
|---------|------------|-----------|------------|----------|
| 65-1500 | 14.36" | 7.45" | 9.30" | 8.20 lbs |
| 65-1501 | 14.36" | 7.45" | 9.30" | 8.20 lbs |

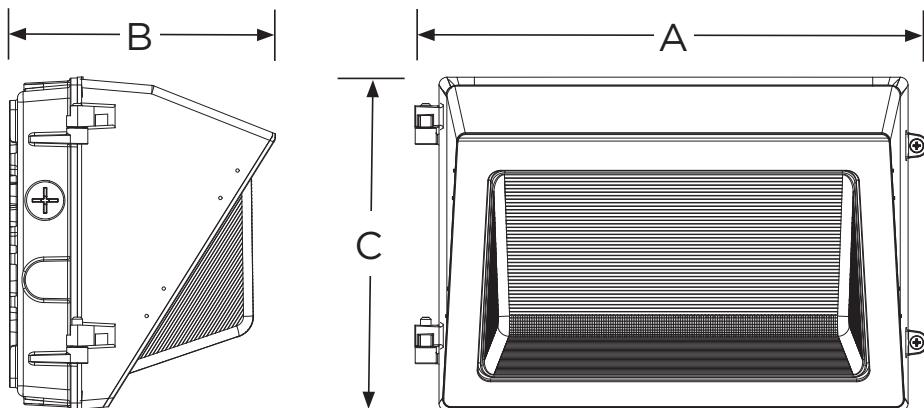

FEATURES



Integrated By-Passable Photocell

Beam, CCT and Wattage Switches

IK08 Vandal Resistant Glass Lens

Integrated Rear-Mounted Level

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Meets requirements of ICES-005 issue 5 class A for use in commercial applications.

Fixture may not be compatible with all dimmers. See satco.com for details.

Specifications are subject to change without prior notice.

Visit satco.com/service/warranty for complete warranty details.

Photometric reports for all configurations are available at satco.com.