

# LED FLOOD LIGHTS

PERFORMER SERIES | WIDE BEAM SPREAD | TEMPERED GLASS



All Models Include  
Separate Mounting Plate

6Vx6H NEMA DISTRIBUTION

DIE-CAST ALUMINUM HOUSING  
WITH TEMPERED GLASS LENS

INTEGRATED HEAT SINK FOR  
THERMAL MANAGEMENT

CONTEMPORARY DESIGN

**SUGGESTED APPLICATIONS**

- Building Facades
- Landscape Lighting
- Security and Perimeter Lighting
- Residential Buildings
- Signs and Billboards
- Wall Wash

The SATCO|NUVO LED Performer Flood Light series delivers reliable, high-output illumination for outdoor area and site lighting applications in a cost-effective design. Constructed with a durable die-cast aluminum housing and a tempered glass lens, these fixtures are built to perform in demanding environments and are wet location rated with an IP65 classification. A wide 120° beam angle and NEMA 6Vx6H distribution provide broad, even light coverage. Offered in multiple wattage and lumen packages, these flood lights achieve up to 115 lumens per watt for efficient operation. Available CCT options include 4000K and 5000K to suit a range of exterior lighting needs. Additional features include an IK06 impact rating and a bronze finish. With a 30,000-hour rated life and a 3-year warranty, this series offers dependable performance and long-term value.

<b>120 VOLT</b>	<b>WET LOCATION</b>	<b>IP 65</b>	<b>IK 06</b>	<b>30,000 HOURS</b>	<b>3 YEAR WARRANTY</b>	<b>TRUSTED NB WARRANTY</b>
-----------------	---------------------	--------------	--------------	---------------------	------------------------	----------------------------

**GENERAL SPECIFICATIONS**

**Input Voltage:** 120V  
**Frequency:** 50/60Hz  
**Power Factor:** >0.94  
**THD:** <30%  
**Dimmable:** Non-Dimmable  
**Surge Protection Rating:** 2kV  
**CRI:** 80  
**Beam Angle:** 120°  
**NEMA Distribution:** 6Vx6H (120°x120°)  
**Bug Rating:** B1-U2-G1

**Location Rating:** Wet  
**IP Rating:** IP65  
**IK Rating:** IK06  
**Ambient Operating Temperature:** -30°C (-22F) to +45°C (+113°F)  
**Construction:** Die-Cast Aluminum  
**Lens Material:** Tempered Glass  
**Finish:** Bronze  
**Functional Life:** 30,000 Hours  
**Warranty:** 3 Years




**ITEM SPECIFICATIONS / ORDER INFO**

Item	Lumens	Wattage	Replacement Wattage	Input Current	CCT	Efficacy
65-725	1695	15W	75W	0.130A	4000K	up to 113 LPW
65-726	1725	15W	75W	0.130A	5000K	up to 115 LPW
65-727	3390	30W	200W	0.250A	4000K	up to 113 LPW
65-728	3450	30W	200W	0.250A	5000K	up to 115 LPW
65-729	5650	50W	250W	0.420A	4000K	up to 113 LPW
65-730	5750	50W	250W	0.420A	5000K	up to 115 LPW
65-731	9040	80W	325W	0.670A	4000K	up to 113 LPW
65-732	9200	80W	325W	0.670A	5000K	up to 115 LPW

**DIMENSIONS / WEIGHTS**

Item	Length (A)	Width (B)	Overall Height (C)	Lamp Height (D)	Weight
65-725	5.97"	1.89"	7.40"	3.94"	1.23 Lbs.
65-726	5.97"	1.89"	7.40"	3.94"	1.23 Lbs.
65-727	5.97"	1.89"	7.40"	3.94"	1.23 Lbs.
65-728	5.97"	1.89"	7.40"	3.94"	1.23 Lbs.
65-729	7.15"	1.89"	8.19"	4.72"	1.47 Lbs.
65-730	7.15"	1.89"	8.19"	4.72"	1.47 Lbs.
65-731	8.33"	1.89"	9.17"	5.71"	1.91 Lbs.
65-732	8.33"	1.89"	9.17"	5.71"	1.91 Lbs.

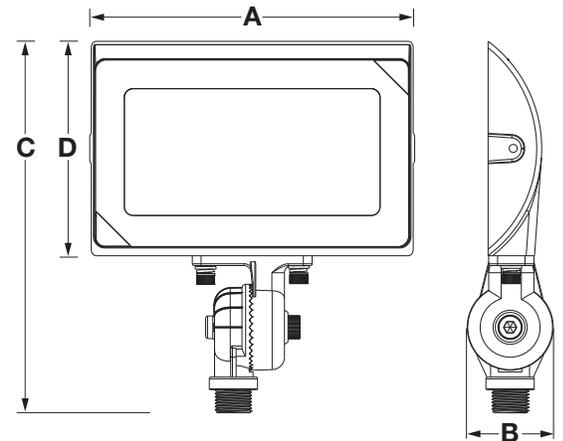

**FEATURES**



IK06 Impact Resistant Lens



Die-Cast Aluminum Housing



Integrated Heat Sink for Thermal Management



1/2" Knuckle Mount

**OPTIONAL ACCESSORIES**

Item	FOR USE WITH 65-725 THROUGH 65-728	
65-737	YOKE MOUNT FOR 15-30W DOB TEMPERED GLASS FLOOD LIGHT; BRONZE FINISH	
Item	FOR USE WITH 65-729 & 65-730	
65-738	YOKE MOUNT FOR 50W DOB TEMPERED GLASS FLOOD LIGHT; BRONZE FINISH	
Item	FOR USE WITH 65-731 & 65-732	
65-739	YOKE MOUNT FOR 80W DOB TEMPERED GLASS FLOOD LIGHT; BRONZE FINISH	
Item	FOR USE WITH ALL SKUS 65-725 THROUGH 65-732	
65-740	TRUNNION MOUNT FOR 15-80W DOB TEMPERED GLASS FLOOD LIGHT; BRONZE FINISH	