

# LED PLT LAMPS

CCT SELECTABLE | BALLAST BYPASS



**OMNIDIRECTIONAL**

**4 CCT SELECTABLE**

**MULTI-BASE COMPATIBLE**

**BALLAST BYPASS TYPE B**

**RANGE VOLTAGE 120V-277V**

**SUGGESTED APPLICATIONS**

- Retail
- Hospitality
- Office Buildings
- Education

Upgrade existing CFL installations with versatile omnidirectional LED PLT lamps designed for performance and flexibility. Available in 7W, 9W, 15W, 17W, and 23W options with GX24d base, these energy-efficient replacements offer seamless compatibility with a wide range of fixtures. Type B operation allows use in ballast bypass applications, simplifying upgrades and reducing installation time. Featuring four selectable CCT options and a broad 120V-277V voltage range, these lamps deliver adaptable, reliable lighting for diverse commercial applications.



**GENERAL SPECIFICATIONS**

**Input Voltage:** 120V-277V  
**Frequency:** 50/60Hz  
**Power Factor:** >0.9  
**THD:** <25%  
**Dimming:** Non-Dimmable  
**Base:** GX24d (compatible with GX24q, G24d, G24q)  
**Ballast Bypass:** Type B  
**Efficacy:** Up to 147 LPW  
**CRI:** 80

**CCT Selectable:** 3000K/3500K/4000K/5000K  
**Beam Angle:** 360°  
**Location Rating:** Damp  
**Ambient Operating Temperature:** -4°F to +113°F to (-20°C to +45°C)  
**Enclosed Fixture Rating:** Yes  
**Operating Position:** Universal  
**Construction:** Frosted Plastic  
**Functional Life:** 50,000 Hours  
**Warranty:** 5 Years



**ITEM SPECIFICATIONS / ORDER INFO**

Item	Order Code	Lumens	Wattage	CFL Replacement	Input Current @120V-277V	Case QTY
S29885	7WPLTL/8CCT4/GX24D/OB/U	960	7W	18W	0.06/0.03A	12
S29886	9WPLTL/8CCT4/GX24D/OB/U	1200	9W	26W	0.08/0.04A	12
S29887	15WPLTL/8CCT4/GX24D/OB/U	2200	15W	32W	0.14/0.06A	12
S29888	17WPLTL/8CCT4/GX24D/OB/U	2500	17W	42W	0.16/0.07A	12
S29889	23WPLTL/8CCT4/GX24D/OB/U	3300	23W	57W	0.20/0.09A	12


**NOMENCLATURE**



- 1-Wattage
- 2-Lamp Type
- 3-LED
- 4-CRI (80)
- 5-4 CCT Selectable
- 6-Base
- 7-Omnidirectional
- 8-Ballast Bypass (UL Type-B)
- 9-Universal Voltage (120V-277V)

**DIMENSIONS / WEIGHTS**

Item	MOL (A)	MOD (B)	Weight
S29885	4.90"	2.00"	0.28 Lbs.
S29886	5.70"	2.00"	0.34 Lbs.
S29887	6.30"	2.00"	0.39 Lbs.
S29888	6.70"	2.00"	0.42 Lbs.
S29889	8.10"	2.00"	0.54 Lbs.

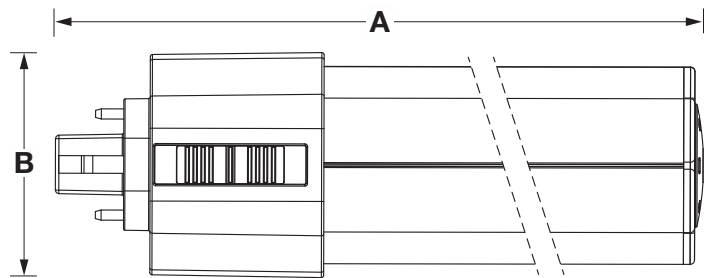

**GX24d Base (compatible with GX24q, G24d, and G24q bases)**



**Durable Plastic Lens**



**CCT Selectable**

Specifications are subject to change without prior notice.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Meets requirements of ICES-005 issue 5 class B for use in residential applications.

**WARNING:** Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Replacement wattage shown depends on application and fixture.

Visit [satco.com/service/warranty](http://satco.com/service/warranty) for complete warranty details.