

HIGH PERFORMANCE FLOOD LIGHTS

BEAM SELECTABLE | FIELD SELECTABLE



The SATCO|NUVO High Performance LED flood lights deliver precise, targeted illumination for outdoor applications where control and flexibility are essential. Featuring NEMA beam angle selectability, these fixtures allow for tailored light distribution to suit specific lighting objectives, from narrow spot lighting to broader coverage. Selectable wattage and CCT further enhances versatility, enabling installers to adjust light output and energy consumption on-site. Multiple lumen packages support a range of mounting heights and project requirements, while the compact design ensures a clean, unobtrusive appearance. Built for durability with IP65 and IK10 ratings, these flood lights are engineered to perform reliably in demanding outdoor environments. Ideal for highlighting vertical elements and focused lighting applications, they provide consistent performance across both available finish options.



BEAM SELECTABLE:
4VX4H / 5VX5H / 6VX6H

FIELD SELECTABLE:
3 CCT & 3 WATTAGE

RANGE VOLTAGE 120V-347V

**INTEGRATED BY-PASSABLE
PHOTOCELL**

SUGGESTED APPLICATIONS

- Flagpole Illumination
- Landscape and Garden Lighting
- Architectural Uplighting
- Building Façade Highlighting
- Sign and Monument Lighting



120-347V

0-10V DIMMING

WET LOCATION

IP 65

IK 10

50,000 HOURS

5 YEAR WARRANTY



GENERAL SPECIFICATIONS

Range Voltage : 120V-347V

Frequency: 50/60Hz

Power Factor: >0.9

THD: <20%

Dimming: 0-10V Dimmable

Surge Protection Rating: 4kV

Efficacy: up to 120 LPW

CRI: 70

CCT Selectable: 3000K/4000K/5000K

Beam Selectable: 4Vx4H/5Vx5H/6Vx6H

Location Rating: Wet

IP Rating: IP65

Ik Rating: IK10

Ambient Operating Temperature : -40°C (-40°F) to +45°C (+113°F)

Housing Material: Die-Cast Aluminum

Lens Material: Polycarbonate (PC)

Functional Life: 50,000 Hours

Warranty: 5 Years


ITEM SPECIFICATIONS / ORDER INFO



Item	Finish	Lumens	Wattage Selectable	Input Current	DLC ID
65-1250	Bronze	3000/2400/1800	25W/20W/15W	0.21-0.07/0.17-0.06/0.13-0.04A	S-OSG3L3
65-1251	Black	3000/2400/1800	25W/20W/15W	0.21-0.07/0.17-0.06/0.13-0.04A	S-OSG3L3

DIMENSIONS / WEIGHTS

Item	Length (A)	Width (B)	Height (C)	Mounting Plate Diameter (D)	Weight
65-1250	7.71"	4.82"	4.92"	4.50"	1.32 Lbs.
65-1251	7.71"	4.82"	4.92"	4.50"	1.32 Lbs.

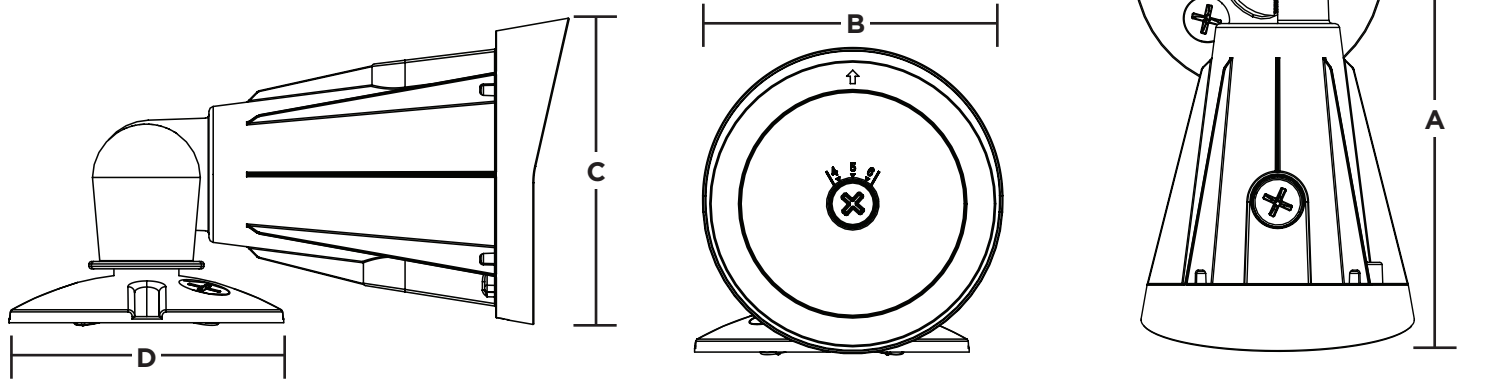

Beam Selectable Dial & IK10 Vandal Resistant Lens



CCT & Wattage Selectable Switches



Integrated By-Passable Photocell



1/2" Knuckle Mount with included Mounting Plate

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Meets requirements of ICES-005 issue 5 class A for use in commercial applications.

Fixture may not be compatible with all dimmers. See satco.com for details

Specifications are subject to change without prior notice.

Visit satco.com/service/warranty for complete warranty details.