

# ADJUSTABLE POST TOPS

FIELD SELECTABLE | 120V-347V



**FIELD SELECTABLE:  
3 CCT & 3 WATTAGE**

**INTEGRATED BY-PASSABLE  
PHOTOCELL**

**ARTICULATING &  
LOCKING HEAD**

**RANGE VOLTAGE 120V-347V**

**3" SLIP-FITTER MOUNT  
INCLUDED**

**BRONZE POWDER  
COATED FINISH**

**SUGGESTED APPLICATIONS**

- Parking Lots
- Parks
- Warehouses
- Commercial Areas
- Arenas
- Walkways



**PERFORMANCE WITH PURPOSE**

The SATCO|NUVO Adjustable LED Post Top Fixtures bring together decorative style, durable construction, and versatile performance for pathways, campuses, parking areas, and many other outdoor communal spaces. Designed with a fully articulating head, these fixtures allow light to be directed where it is needed most for customized coverage and enhanced visual appeal. An integrated by-passable photocell adds convenient dusk-to-dawn operation, while selectable wattage and CCT options provide added flexibility. Finished with a protective powder-coated bronze housing and built to withstand the elements with IP65 wet-location protection and IK08 impact resistance, these fixtures deliver reliable long-lasting illumination for demanding exterior environments.

120-347V
0-10V DIMMING
WET LOCATION
IP 65
IK 08
6KV SURGE PROTECTION
DLC LISTED
50,000 HOURS
5 YEAR WARRANTY
TRUSTED NB WARRANTY

**GENERAL SPECIFICATIONS**

**Range Voltage:** 120V-347V  
**Frequency:** 50/60Hz  
**Power Factor:** >0.9  
**THD:** <20%  
**Dimmable:** 0-10V Dimmable  
**Surge Protection:** 6kV  
**Efficacy:** Up to 145 LPW  
**CRI:** 80+  
**CCT Selectable:** 3000K/4000K/5000K  
**Beam Angle:** 90°

**Location Rating:** Wet  
**IP Rating:** IP65  
**IR Rating:** IK08  
**Ambient Operating Temperature:** -40°F to +113°F (-40°C to +45°C)  
**Housing Material:** Die-Cast Aluminum  
**Lens Material:** Polycarbonate (PC)  
**Finish:** Bronze  
**Functional Life:** 50,000 Hours  
**Warranty:** 5 Years

**ITEM SPECIFICATIONS / ORDER INFO**




Item	Lumens	Wattage Selectable	Max. HID Replacement Wattage	Input Current	BUG Rating	DLC ID
65-895	10875-4375	75W/55W/35W	175W	0.63-0.22/0.46-0.41/0.29-0.10A	B3-U3-G1	S-41BG1L
65-896	21750-12500	150W/125W/100W	300W	1.25-0.43/1.04-0.36/0.83-0.29A	B4-U3-G1	S-KZ0WWW

**DIMENSIONS / WEIGHTS**

Item	Diameter (A)	Height (B)	Weight
65-895	17.89"	20.75"	10.56 Lbs.
65-896	20.89"	23.76"	14.74 Lbs.

\*3" Fitter

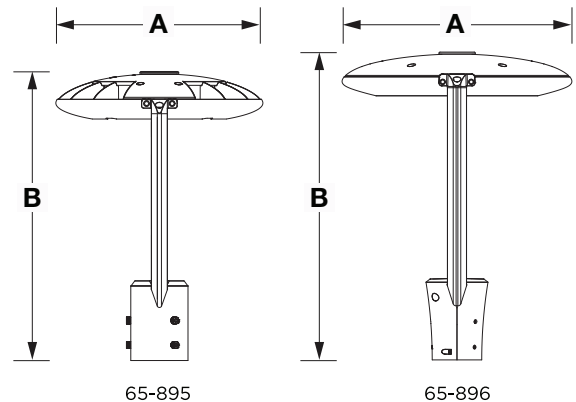

**FEATURES**



CCT and Wattage Switches



IK08 Impact Resistant Lens



Integrated By-passable Photocell



Slip Fitter Mount



Articulating Head

May not be compatible with all dimmers. See [satco.com](http://satco.com) for details

Specifications are subject to change without prior notice.

WARNING: This product can expose you to chemicals including Lead which is known to the State of California to cause cancer, or birth defects, or other reproductive harm. For more information, go to <http://www.P65Warnings.ca.gov>.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Meets requirements of ICES-005 issue 5 class A for use in commercial applications.

MIN 75°C SUPPLY CONDUCTORS

IMPORTANT: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

Visit [satco.com/service/warranty](http://satco.com/service/warranty) for complete warranty details.