



**AVAILABLE IN UP, DOWN, AND
UP/DOWN CONFIGURATIONS**

3 CCT SELECTABLE

**INTEGRATED BY-PASSABLE
PHOTOCELL**

**OFFERED IN THREE SIZES
AND THREE FINISH OPTIONS**

**DIE-CAST ALUMINUM
CONSTRUCTION**

SUGGESTED APPLICATIONS

Building Facades
Entryways
Hospitality
Hallways
Stairwells

LED OUTDOOR WALL CYLINDERS

UP, DOWN, OR UP & DOWN LIGHTING OPTIONS
CCT SELECTABLE



6" White



3" Dark Bronze



4" Black

**Available in 3 sizes in Black, White
and Dark Bronze Finishes**

SATCO|NUVO's LED Outdoor Wall Cylinders combine modern styling with enhanced performance and flexibility for today's exterior lighting applications. Choose from 3-inch, 4-inch, and 6-inch models, all featuring 3 CCT selectable technology (3000K/4000K/5000K) to customize the lighting environment to suit the space. Available in dedicated up or downlight, or combined up/down lighting configurations, each fixture is equipped with an integrated by-passable photocell for added control and convenient dusk-to-dawn operation. Multiple sizes and finishes make it easy to create a cohesive look across residential and commercial projects.



GENERAL SPECIFICATIONS

Input Voltage: 120-277V

Frequency: 50/60Hz

Power Factor: >0.9

THD: <20%

Dimming: Non-Dimmable

Surge Protection Rating: 2kV

Efficacy: Up to 105 LPW

CRI: 90+

CCT Selectable: 3000K/4000K/5000K

Beam Angle: 50°

Location Rating: Wet

IP Rating: IP65

IK Rating: IK05

Ambient Operating Temperature: -40°F to +122°F (-40°C to +50°C)

Housing Material: Die-cast Aluminum

Lens Material: Glass

Functional Life: 50,000 Hours

Warranty: 3 Years



ITEM SPECIFICATIONS / ORDER INFO

Item	Cylinder Size	Finish	Lumens	Wattage	Max Replacement Wattage	Light Distribution
65-1750	3"	White	950/900/850	10W	60W	Single Direction (Up or Down)
65-1751	3"	Black	950/900/850	10W	60W	Single Direction (Up or Down)
65-1752	3"	Dark Bronze	950/900/850	10W	60W	Single Direction (Up or Down)
65-1753	4"	White	950/900/850	10W	60W	Single Direction (Up or Down)
65-1754	4"	Black	950/900/850	10W	60W	Single Direction (Up or Down)
65-1755	4"	Dark Bronze	950/900/850	10W	60W	Single Direction (Up or Down)
65-1756	6"	White	1900/1800/1700	20W	100W	Single Direction (Up or Down)
65-1757	6"	Black	1900/1800/1700	20W	100W	Single Direction (Up or Down)
65-1758	6"	Dark Bronze	1900/1800/1700	20W	100W	Single Direction (Up or Down)
65-1759	3"	White	950/900/850	10W	60W	Dual Direction (Up & Down)
65-1760	3"	Black	950/900/850	10W	60W	Dual Direction (Up & Down)
65-1761	3"	Dark Bronze	950/900/850	10W	60W	Dual Direction (Up & Down)
65-1762	4"	White	1900/1800/1700	20W	100W	Dual Direction (Up & Down)
65-1763	4"	Black	1900/1800/1700	20W	100W	Dual Direction (Up & Down)
65-1764	4"	Dark Bronze	1900/1800/1700	20W	100W	Dual Direction (Up & Down)
65-1765	6"	White	3780/3600/3420	36W	200W	Dual Direction (Up & Down)
65-1766	6"	Black	3780/3600/3420	36W	200W	Dual Direction (Up & Down)
65-1767	6"	Dark Bronze	3780/3600/3420	36W	200W	Dual Direction (Up & Down)

Specifications are subject to change without prior notice.

Warning: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Meets requirements of ICES-005 issue 5 class B for use in residential and commercial applications.

Min 75°C SUPPLY CONDUCTORS


IMPORTANT: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.


Visit satco.com/service/warranty for complete warranty details.

DIMENSIONS / WEIGHTS


Item	Cylinder Size	Width (A)	Height (B)	Extends (C)	Weight
65-1750	3"	4.57"	6.77"	4.17"	1.70 Lbs.
65-1751	3"	4.57"	6.77"	4.17"	1.70 Lbs.
65-1752	3"	4.57"	6.77"	4.17"	1.70 Lbs.
65-1753	4"	4.57"	11.81"	5.00"	2.31 Lbs.
65-1754	4"	4.57"	11.81"	5.00"	2.31 Lbs.
65-1755	4"	4.57"	11.81"	5.00"	2.31 Lbs.
65-1756	6"	6.02"	10.20"	7.76"	5.50 Lbs.
65-1757	6"	6.02"	10.20"	7.76"	5.50 Lbs.
65-1758	6"	6.02"	10.20"	7.76"	5.50 Lbs.
65-1759	3"	4.57"	6.77"	4.17"	1.72 Lbs.
65-1760	3"	4.57"	6.77"	4.17"	1.72 Lbs.
65-1761	3"	4.57"	6.77"	4.17"	1.72 Lbs.
65-1762	4"	4.57"	11.81"	5.00"	2.36 Lbs.
65-1763	4"	4.57"	11.81"	5.00"	2.36Lbs.
65-1764	4"	4.57"	11.81"	5.00"	2.36 Lbs.
65-1765	6"	6.02"	10.20"	7.76"	5.58 Lbs.
65-1766	6"	6.02"	10.20"	7.76"	5.58 Lbs.
65-1767	6"	6.02"	10.20"	7.76"	5.58 Lbs.

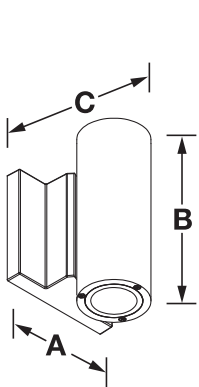

3-Inch Cylinder

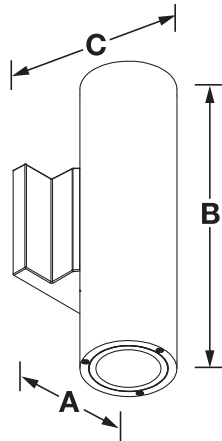

4-Inch Cylinder

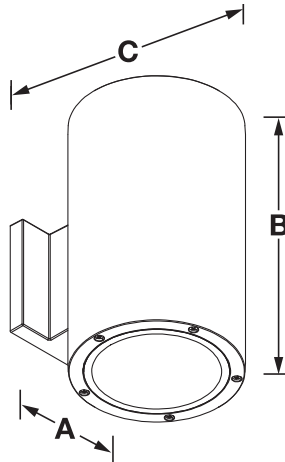

6-Inch Cylinder

FEATURES




CCT Selectable Switch



Die-cast Aluminum Housing



By-Passable Photocell

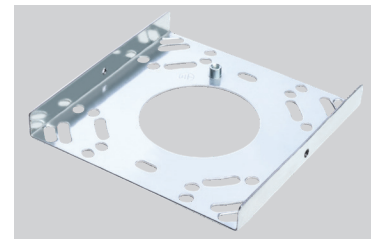

Universal Mount Backplate