

LED 4' T8 LAMP

FIELD SELECTABLE | BALLAST BYPASS



**3 WATTAGE AND
5 CCT SELECTABLE**

BALLAST BYPASS: TYPE B

DLC LISTED

RANGE VOLTAGE 120-277V

**EMERGENCY DRIVER
COMPATIBLE**

SUGGESTED APPLICATIONS

Warehouses
Factories
Grocery Stores
Big Box Stores



SATCO's 4' T8 Lamp is Field Selectable - offering the ability to change both wattage and color temperature in the field. Wattage options include 11, 12, or 15W with lumen output ranging from 1650 to 2200 lumens. Five color temperatures are available ranging from Soft White to Daylight: 3000, 3500, 4000, 5000 or 6500K. These lamps are ballast bypassable (Type B) for direct-wire applications, constructed with glass tubes, and are NSF Rated ensuring they will meet the most stringent standards. This versatile lamp is an ideal solution for warehouses, factories and retail environments.



GENERAL SPECIFICATIONS

Input Voltage: 120-277V

Frequency: 50/60Hz

Power Factor: 0.9

THD: <25%

Efficacy: Up To 147 LPW

CRI: 80+

CCT Selectable: 3000/3500/4000/5000/6500K

Wiring: Single Ended, Double Ended

Base: G13

Dimming: Dimmable through Wattage Selection

Beam Angle: 210°

Location Rating: Damp

Ambient Operating Temperature: -4°F to 113°F (-20°C to 45°C)

Enclosed Fixture Rating: Yes. Not for use in vapor tight fixtures.

Construction: Glass Tube

Functional Life: 50,000 Hours

Warranty: 5 Years




ITEM SPECIFICATIONS / ORDER INFO

Item	Order Code	Length	Lumens	Wattage	Replacement Wattage	Input Current @ 120-277V	DLC ID	Case QTY
S11768	15T8L/48/8CCT5/B/GF/U	4'	2200/1800/1650	15/12/11W	32/30/28/25W	0.08-0.03A	S-6HxD6X	25

DIMENSIONS / WEIGHTS

Item	Length (A)	Width (B)	Weight
S11768	47.73"	1.00"	0.45 Lbs

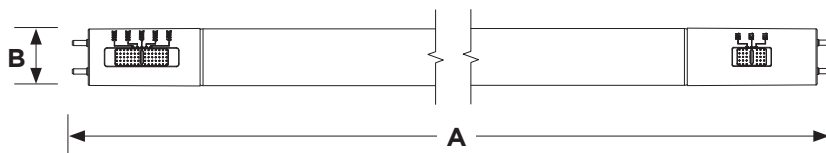

NOMENCLATURE

15T8L/48/8CCT5/B/GF/U
1 2 3 4 5 6 7 8 9 10

1- Max Wattage

2- Lamp Type

3- LED

4- Length

5- CRI (80)

6- Kelvin (5 CCT Selectable)

7- UL Type B (Ballast Bypass)

8- Glass

9- Frosted

10- Universal Voltage (120-277V)

FEATURES



Wattage Selectable



Color Temperature Selectable

OPTIONAL ACCESSORIES

Item	FOR USE WITH S11768
S8000	5W Emergency Driver
S8002	10W Emergency Driver



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Meets requirements of ICES-005 issue 5 class B for use in residential applications.

Replacement wattage shown depends on application and fixture.

Specifications are subject to change without prior notice.