



# DUAL HEAD SECURITY LIGHTS

## SQUARE HEADS | STANDARD & MOTION SENSOR MODELS



65-1400



65-1403



**DIE-CAST ALUMINUM  
CONSTRUCTION**

**120-277V UNIVERSAL  
VOLTAGE INCLUDING  
MOTION SENSOR MODELS**

**FULLY ARTICULATING &  
LOCKABLE HEADS**

**CCT SELECTABLE  
3000/4000/5000K**

**STANDARD AND MOTION  
SENSOR MODELS WITH  
DUSK-TO-DAWN OPTIONS**

### SUGGESTED APPLICATIONS

Walkways  
Driveways  
Garages  
Sheds  
Patios

SATCO|NUVO's Dual Head Security Lights deliver dependable outdoor illumination for residential and commercial applications. Available in an architectural square head design, these fixtures feature selectable 3000K, 4000K, and 5000K color temperatures and are offered in black, white, and bronze finishes to complement a variety of exteriors. Constructed from rugged die-cast aluminum for lasting durability, the adjustable lamp heads articulate for precise aiming and lock securely into place. Available with or without an integrated motion sensor, every model operates on universal 120-277V input voltage, including sensor versions. Motion sensor models also function as dusk-to-dawn fixtures with convenient wall switch override, while the IP65-rated housing provides reliable protection against the elements.



### GENERAL SPECIFICATIONS

**Input Voltage:** 120-277V  
**Frequency:** 50/60Hz  
**THD:** <20%  
**Dimmable:** Non-Dimmable  
**Surge Protection Rating:** 2kV  
**CCT Selectable:** 3000K/4000K/5000K  
**Wattage:** 20W  
**Max. Replacement Wattage:** 125W  
**Input Current @ 120V/277V:** 0.18-0.08A

**Beam Angle:** 70°  
**Efficacy:** Up to 100 LPW  
**CRI:** 80+  
**Location Rating:** Wet  
**IP Rating:** IP65  
**Ambient Operating Temperature:** -40°F to +122°F (-40°C to +50°C)  
**Housing Material:** Die-Cast Aluminum  
**Rated Life Hours:** 50,000 Hours  
**Warranty:** 5 Year

### MOTION SENSOR SPECIFICATIONS

**Motion Sensor Type:** PIR  
**Detection Range:** Up to 60 feet  
**Detection Angle:** 180°

**Time Setting:** 10 Seconds to 10 Minutes  
**Dusk to Dawn Feature:** Yes  
**Manual Override Available:** Yes

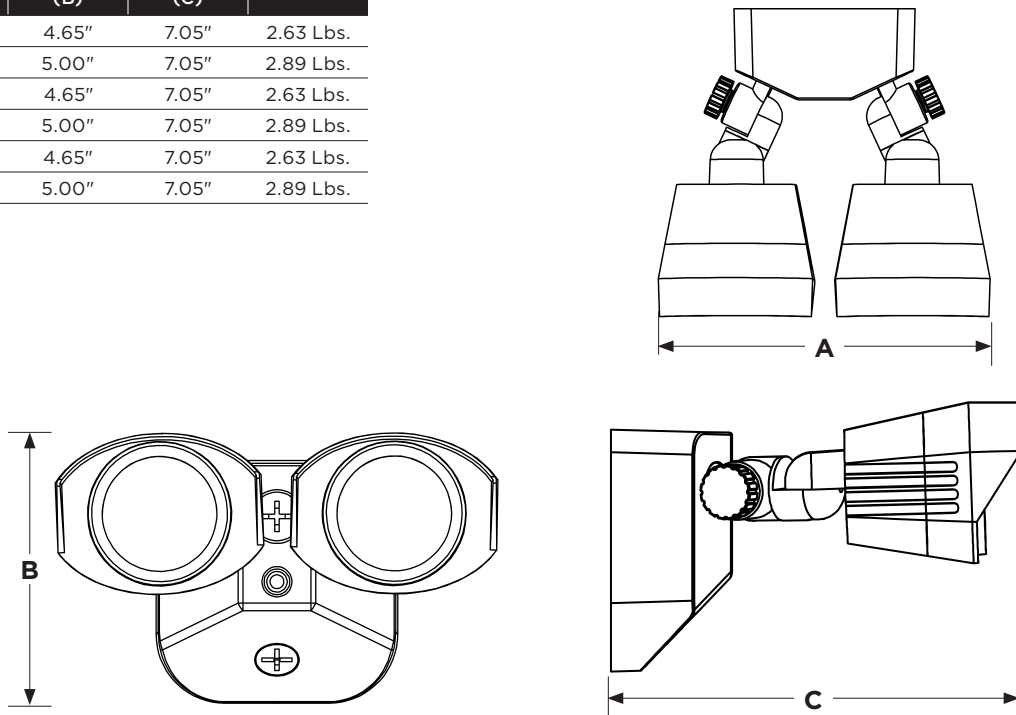
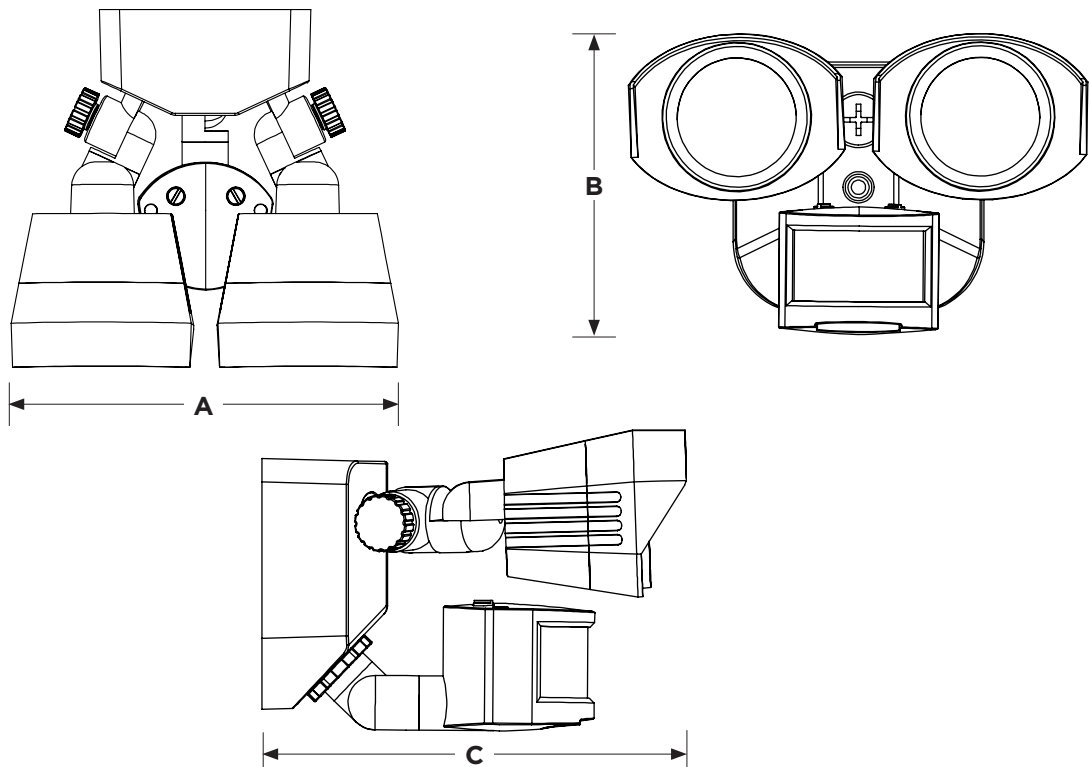
### ITEM SPECIFICATIONS / ORDER INFO



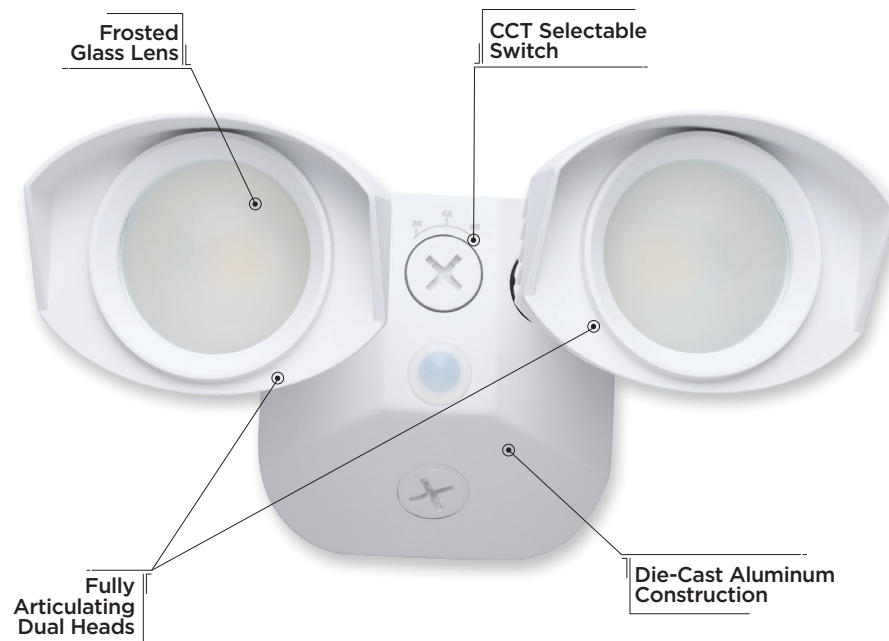
| Item                 | Lumens         | Housing Color | Lens Finish/<br>Material | Head<br>Shape | Mounting<br>Options            |
|----------------------|----------------|---------------|--------------------------|---------------|--------------------------------|
| STANDARD MODELS      |                |               |                          |               |                                |
| 65-1400              | 1800/1900/2000 | White         | Glass/Frosted            | Square        | Recessed J-Box Mount Wall/Eave |
| 65-1402              | 1800/1900/2000 | Bronze        | Glass/Frosted            | Square        | Recessed J-Box Mount Wall/Eave |
| 65-1404              | 1800/1900/2000 | Black         | Glass/Frosted            | Square        | Recessed J-Box Mount Wall/Eave |
| MOTION SENSOR MODELS |                |               |                          |               |                                |
| 65-1401              | 1800/1900/2000 | White         | Glass/Frosted            | Square        | Recessed J-Box Mount Wall/Eave |
| 65-1403              | 1800/1900/2000 | Bronze        | Glass/Frosted            | Square        | Recessed J-Box Mount Wall/Eave |
| 65-1405              | 1800/1900/2000 | Black         | Glass/Frosted            | Square        | Recessed J-Box Mount Wall/Eave |

**DIMENSIONS / WEIGHTS**

| Item    | Width (A) | Height (B) | Extends (C) | Weight    |
|---------|-----------|------------|-------------|-----------|
| 65-1400 | 7.64"     | 4.65"      | 7.05"       | 2.63 Lbs. |
| 65-1401 | 7.64"     | 5.00"      | 7.05"       | 2.89 Lbs. |
| 65-1402 | 7.64"     | 4.65"      | 7.05"       | 2.63 Lbs. |
| 65-1403 | 7.64"     | 5.00"      | 7.05"       | 2.89 Lbs. |
| 65-1404 | 7.64"     | 4.65"      | 7.05"       | 2.63 Lbs. |
| 65-1405 | 7.64"     | 5.00"      | 7.05"       | 2.89 Lbs. |

**SQUARE HEAD SECURITY LIGHT**

**SQUARE HEAD SECURITY LIGHT WITH MOTION SENSOR**


**DUAL HEAD SQUARE SECURITY LIGHT MODEL**



**DUAL HEAD SQUARE SECURITY LIGHT MODEL WITH MOTION SENSOR**



For warranty visit:  
[satco.com/service/warranty](http://satco.com/service/warranty)

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Meets requirements of ICES-005 issue 5 class B for use in residential and commercial applications.

MIN 75°C SUPPLY CONDUCTORS.

IMPORTANT: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

Specifications are subject to change without prior notice.