



**FIELD SELECTABLE -
3 CCT & 3 WATTAGES**

**BEAM SELECTABLE -
30°/40°/50°/60°**

**UNIVERSAL 120-347V
OPERATION WITH
0-10V DIMMING**

**ALUMINUM HOUSING IN
BLACK OR WHITE FINISHES**

SUGGESTED APPLICATIONS

Commercial
Hospitality
Offices
Religious Facilities

LED CYLINDER FLUSH MOUNTS

BEAM SELECTABLE | FIELD SELECTABLE



One fixture...Three ways to customize performance.

SATCO|NUVO's LED Cylinder Flush Mounts combine selectable wattage, CCT, and beam angle in one versatile solution, making it easy to customize lighting performance for the application. Designed to simplify inventory while maximizing flexibility, these canister lights make it easy to adjust light output, color temperature, and beam distribution on-site without changing fixtures. Available in black and white finishes with universal 120-347V operation and 0-10V dimming, they deliver dependable performance, simplified specification, and exceptional value across a wide range of commercial applications.



GENERAL SPECIFICATIONS

Range Voltage: 120-347V

Frequency: 50/60Hz

Power Factor: >0.9

THD: <20%

Dimming: 0-10V Dimmable

Surge Protection Rating: 4kV

Efficacy: up to 107 LPW

CRI: 80+

Wattage Selectable: 35/28/21W

Max Replacement Wattage: 200W

Lumen Range: 2121-3610

CCT Selectable: 3000/4000/5000K

Beam Selectable: 30°/40°/50°/60°

Input Current: 0.29-0.10/0.23-0.08/0.18-0.06A

BUG Rating: B3-U2-G0

Location Rating: Damp

IP Rating: IP40

IK Rating: IK05

Ambient Operating Temperature: -40°F to +113°F (-40°C to +45°C)

Housing Material: Aluminum

Lens Material: Polycarbonate (PC)

Wire Length: 13 Inches

Mounting Options: Surface or Pendant (with Optional Accessory)


Functional Life: 50,000 Hours

Warranty: 5 Year




ITEM SPECIFICATIONS / DIMENSIONS

Item	Finish	Diameter (A)	Height (B)	Weight
65-1050	White	5.75"	7.24"	3.53 Lbs.
65-1051	Black	5.75"	7.24"	3.53 Lbs.

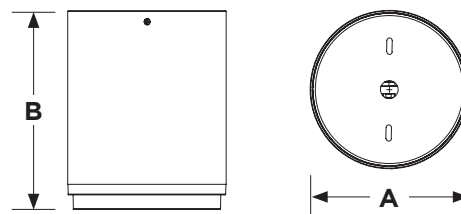

FEATURES

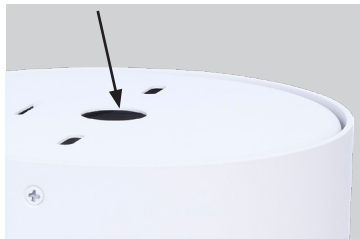

Internal CCT & Wattage Selectable Switches



Universal Keyhole Slots for Direct Surface or Junction Box Mounting



Beam Selectable by Twisting Lower Section



Durable Aluminum Frame & Polycarbonate Lens

OPTIONAL ACCESSORIES

Item	FOR USE WITH 65-1050	
65-1054	Pendant Kit for 65-1050; 8 Foot Cord; Water Proof cover	
Item	FOR USE WITH 65-1051	
65-1055	Pendant Kit for 65-1051; 8 Foot Cord; Water Proof Cover	

Specifications are subject to change without prior notice.

Warning: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Meets requirements of ICES-005 issue 5 class B for use in residential and commercial applications.

IMPORTANT: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Min 75°C SUPPLY CONDUCTORS

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

Visit satco.com/service/warranty for complete warranty details.