

LED EXIT LIGHTS


CHICAGO APPROVED



67-300, 67-301



67-302



**RED LETTERS ON WHITE
BACKGROUND**

**CEILING, WALL OR SIDE
MOUNTING**

**STEEL HOUSING
CONSTRUCTION**

**90-MINUTE BATTERY
BACKUP RUNTIME**

**TEST SWITCH AND AC
SUPPLY INDICATOR**

SUGGESTED APPLICATIONS

Commercial & Industrial,
Garages, Retail, Schools,
Hospitals

SATCO|NUVO's Chicago Approved LED Exit Signs deliver dependable emergency egress illumination with a clean, professional appearance. A premium frosted glass face with bold red 6-inch EXIT lettering is paired with durable steel construction for long-lasting performance. Universal mounting options support wall, ceiling, and end installations. The AC-only model is available for use with backup generators while the Battery Backup models include an integrated emergency battery backup with a 90-minute run time, push-to-test button, and AC power indicator for reliable operation during power outages. UL 924 certified and designed to meet Chicago code requirements, these exit signs are rated for damp locations and provide dependable performance when it matters most. Optional Single and Double Face directional arrow panel kits are sold separately to accommodate a variety of installation requirements.



GENERAL SPECIFICATIONS

Input Voltage: 120V-277V

Frequency: 50/60Hz

Power Factor: >0.4

THD: <130%

Letter Height: 6"

Letter Color: Red

Face Type: Single

Directional Arrow: Directional Panel Kits sold separately

Housing Construction / Finish: Steel / Gloss White

Lens Material / Finish: Glass / Frosted

Mounting Options: Universal

Location Rating: Damp

Ambient Operating Temperature: +41°F to +113°F (+5°C to +45°C)

Warranty: 2 Year




ITEM SPECIFICATIONS / ORDER INFO


Item	Product Code	Wattage	Input Current @ 120V/277V	Emergency Backup	Emergency Duration/Run Time	Recharge Time	Battery Push to Test Button	Battery Type
67-300	EX/WH/U/BB/CH	4W	0.03-0.01A	Yes	90 Minutes	24 Hours	Yes	LiFePO4
67-301	EX/WH/U/BB/RC/CH	6.5W	0.05-0.02A	Yes	90 Minutes	24 Hours	Yes	LiFePO4
67-302	EX/WH/U/CH	4W	0.03-0.01A	No	-	-	-	-

DIMENSIONS / WEIGHTS

Item	Width (A)	Height (B)	Depth (C)	Weight
67-300	12.13"	9.13"	2.38"	5.95 Lbs.
67-301	12.13"	9.13"	2.38"	5.95 Lbs.
67-302	12.13"	9.13"	2.38"	5.79 Lbs.

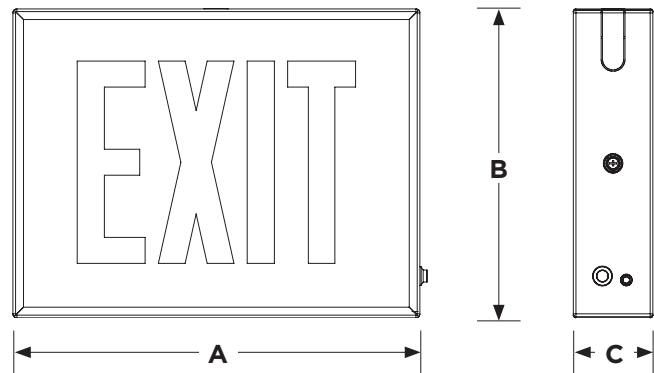

NOMENCLATURE



- 1-Product Family (EX=Exit Sign)
- 2-Housing Color (WH = White)
- 3-Input Voltage (U=120-277V)
- 4-Battery Backup (Blank=AC Only, BB=Battery Backup)
- 5-Remote Capable (Blank=No support, RC=Remote Capable)
- 6-City of Code (CH=Chicago)

FEATURES



Red Lettering, Single Face



Test Switch & Power Supply Indicator



Ceiling Wall or Side Mount Capable

OPTIONAL ACCESSORIES

Item	Compatible with ALL SKUS (67-300 to 67-302)	
67-320	Exit Sign Panel Accessory; White Glass Panel; Red EXIT Signage; No Arrows	
67-321	Exit Sign Panel Accessory; White Glass Panel; Red EXIT Signage; Right Direction Arrow	
67-322	Exit Sign Panel Accessory; White Glass Panel; Red EXIT Signage; Left Direction Arrow	
67-323	Exit Sign Panel Accessory; White Glass Panel; Red EXIT Signage; Double Direction Arrow	
67-324	Exit Sign Panel Accessory; White Glass Panel; Red STAIR Signage; No Arrows	
67-325	Exit Sign Panel Accessory; White Glass Panel; Red STAIR Signage; Right Direction Arrow	
67-326	Exit Sign Panel Accessory; White Glass Panel; Red STAIR Signage; Left Direction Arrow	
67-327	Exit Sign Panel Accessory; White Glass Panel; Red STAIR Signage; Double Direction Arrow	
67-330	Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red EXIT Signage; No Arrows	
67-331	Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red EXIT Signage; One Panel Has Right Direction Arrow; The Other Panel Has A Left Direction Arrow	
67-332	Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red EXIT Signage; Double Direction Arrows	
67-333	Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red STAIR Signage; No Arrows	
67-334	Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red STAIR Signage; One Panel Has Right Direction Arrow; The Other Panel Has a Left Direction Arrow	
67-335	Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red STAIR Signage; Double Direction Arrows	
Item	Compatible with 67-301	
67-395	Remote Emergency Light; Chicago Approved; White Housing; Single Head; 6 Vdc 1.5 W	
67-396	Remote Emergency Light; Chicago Approved; White Housing; Dual Head; 6 Vdc 3.0 W	

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Meets requirements of ICES-005 issue 5 class B for use in residential and commercial applications.

Specifications are subject to change without prior notice.

Visit satco.com/service/warranty for complete warranty details.